
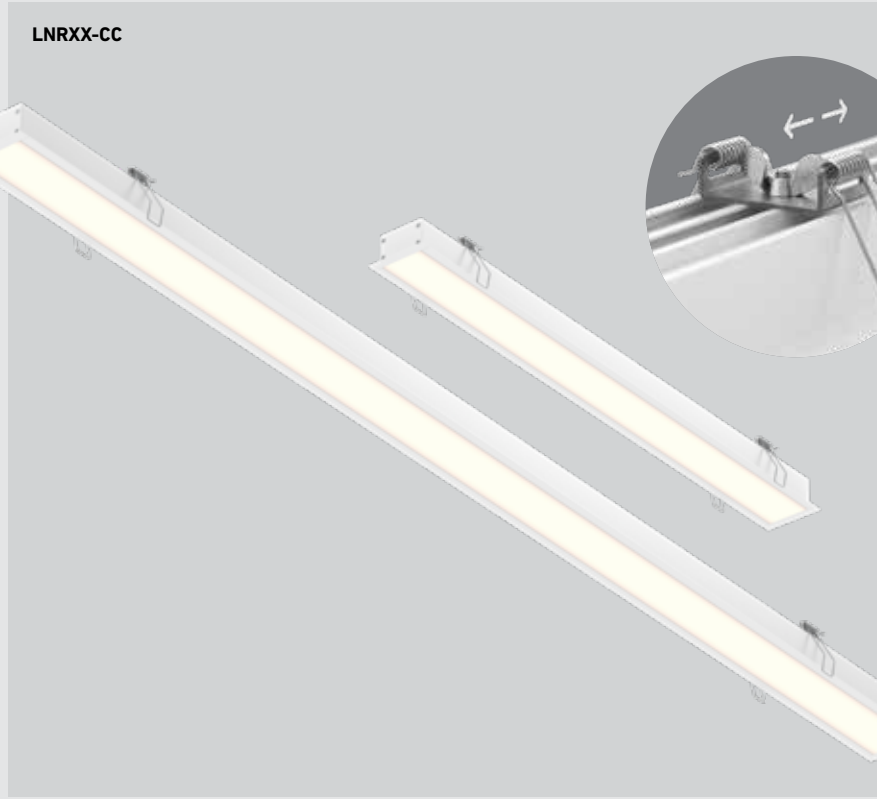


BOULEVARD



The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
LNR24-CC	24"	20 W	1725 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LNR48-CC	48"	40 W	3760 lm			

or

V: 120 / 277 / 347V
0-10V dimming
 (Check for availability)

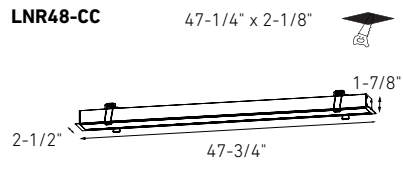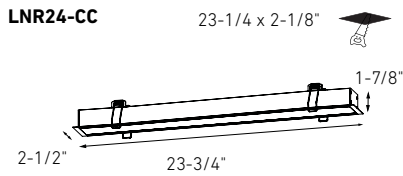

More from this family



LNP48-CC
pg. 124



LNP48-CC
pg. 124



LNF48-CC
pg. 124

Specifications

- Every fixture includes a junction box with integrated dimmable driver
- Can be daisy chained
- Aluminum construction
- Switch-selectable CCT
- 108° beam spread
- 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

- LNACC-L16FT**
16-foot lens for Boulevard series pendants and recessed linears
- RFP-LNR24**
Rough-in plate for LNR24
- RFP-LNR48**
Rough-in plate for LNR48
- REC-CC-EXT8FT**
8-foot extension cable
- REC-CC-EXT20FT**
20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.