


Alter series

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation. The change will be illuminating.




DRY



RETROFIT

T24
JA8

CERTIFIED

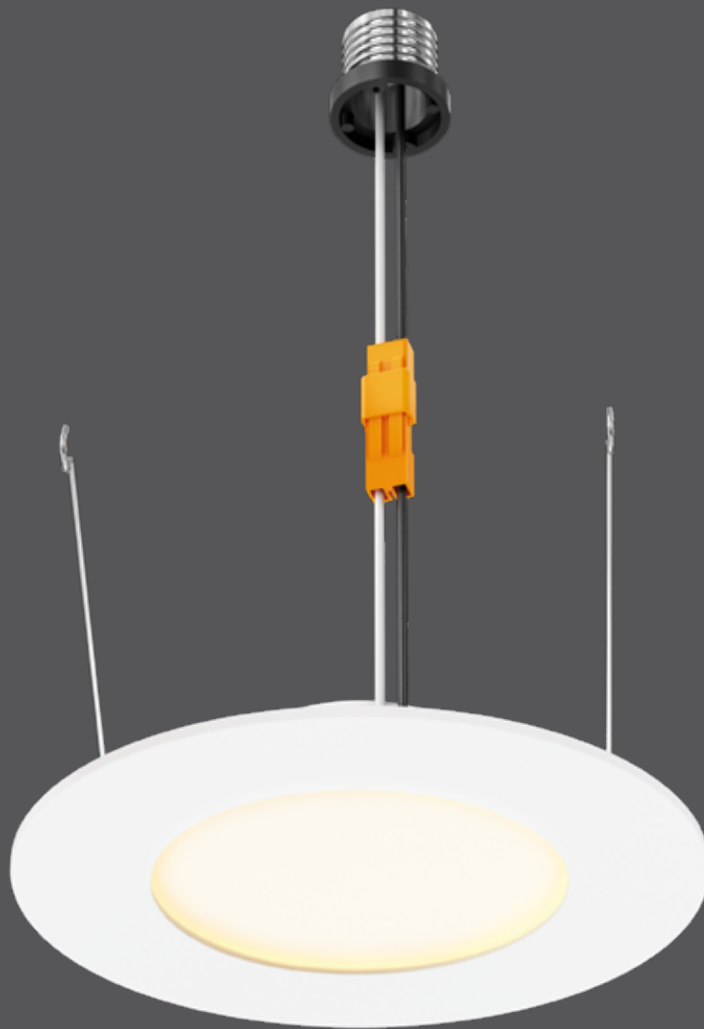

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDPNLRTF56-CC	6"	10 W	720 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

Specifications

120V AC, A19 bulb replacement
 Fits into 5-1/2" to 6" recessed housings
 Integrated dimmable driver
 Switch-selectable CCT: 2700 K/3000 K/
 3500 K/4000 K/5000 K
 Aluminum trim and housing
 Over 35,000 hours of service life
 Minimal heat emission
 Frosted lens
 Edge-lit technology
 Very low profile
 Aluminum heatsink and thermal protection
 Suitable for dry locations
 Refer to website for dimmer compatibility
 Ideal operating temperature:
 -20° to 40° C
 5-year warranty

Finish

○ **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.



LEDPNLRTF56-CC

