



Square panel light

When looking for a modern design, a square lighting fixture is often the best choice. Even better, imagine being able to use a round cutout for installation. This is now a reality with the improved concept of this square panel light.

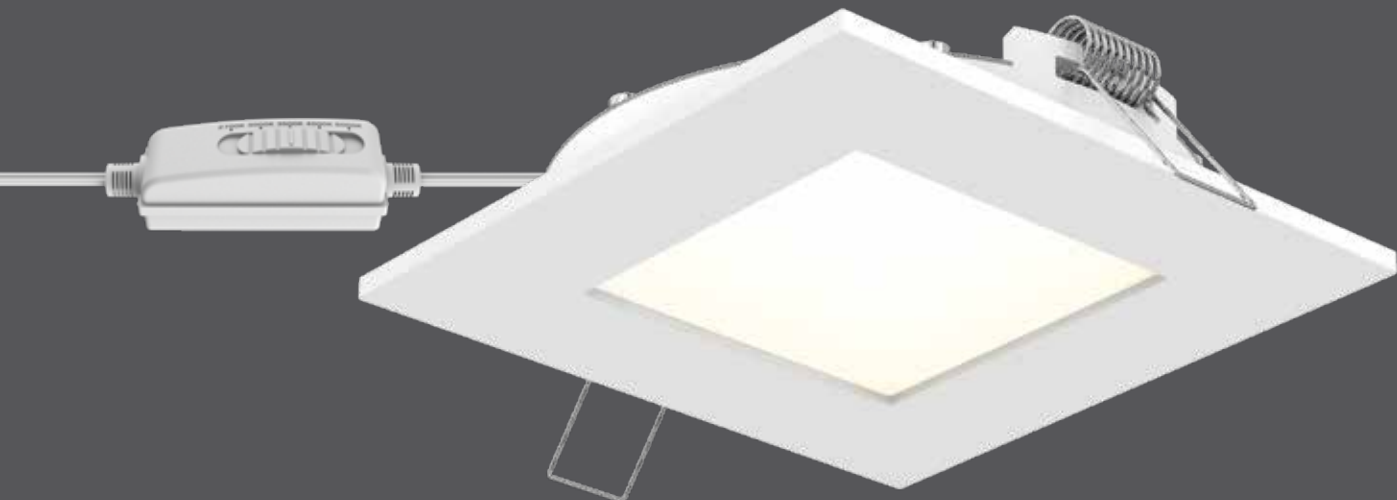

WET



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
5004SQ-CC	4"	11 W	770 lm	880 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

Specifications

Every fixture includes a junction box with an integrated driver
 Over 35,000 hours of service life
 Can be daisy chained
 Superior LED performance and lifespan
 Smooth 360° wide spread
 Minimal heat emission
 Frosted lens
 Edge lit technology
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K

Very low profile
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

REC-5CCT-EXT108
 108" extension cable
RFP-46 (5004SQ-CC)
 Rough-in plate
RFP-UNI
 Universal rough-in plate

Order example

5004SQ-CC-WH
 White 4" square panel with
 770 lumens at 3000 K

Note


Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

5004SQ-CC

Ø4 1/4" 



4 1/2" x 4 1/2" (D) x 1/2"



5.1" x 3" x 1.25"

