

# Mystique

There are moments when you want the ability to direct light as you please. With our LED Gimbal recessed fixture, this has now become a reality with the easiest of installations.



WET



MULTIPLE TRIM  
COLORS



ENERGY STAR



ETL  
Intertek

IC

RATED

JA8


CERTIFIED



AIR TIGHT



COLOR TEMPERATURE

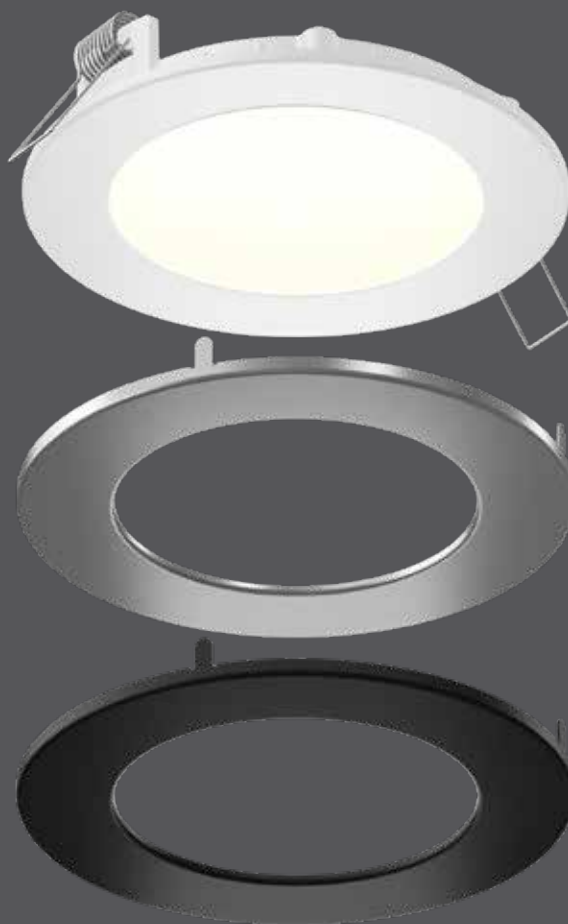

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
<b>SPN4-CC-3T</b>	4"	11 W	800 lm	850 lm	90	3000-4000-5000 K	120 V
<b>SPN6-CC-3T</b>	6"	14 W	1060 lm	1100 lm	90	3000-4000-5000 K	120 V

### Specifications

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained  
 Minimal heat emission  
 Aluminum construction  
 IC certification (suitable for direct contact with insulation)  
 Air-tight certified as per ASTM E283-04  
 Over 50,000 hours of service life  
 3 interchangeable trim colors included  
 Switch-selectable CCT: 3000 K/4000 K/5000 K  
 110° beam angle  
 Suitable for wet locations  
 Refer to website for dimmer compatibility  
 Ideal operating temperature: -20° to 40° C  
 5-year warranty

### Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

### Accessories

- REC-PT4-BB (SPN4-CC-3T)**  
4" recessed panel trim in brushed brass
- REC-EXT108**  
108" extension cable
- RFP-UNI**  
Universal rough-in plate
- RFP-46**  
Rough-in plate for 4" and 6" models

### Order example


#### **SPN4-CC-3T**

Dimmable 4" recessed downlight, black/satin nickel/white finishes, with 3 switch-selectable CCT's: 3000 K, 4000 K, 5000 K

### Note

Other Color °T and Finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

**SPN4-CC-3T**

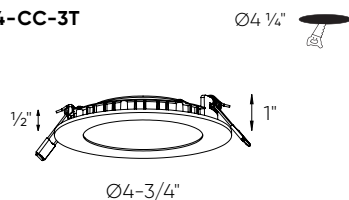

**SPN6-CC-3T**

