

Mystique

If you are looking for a sleek, attractive LED option for your ceilings, then our color-changing panel light with interchangeable trims is the perfect choice. With the flick of a switch, you have the ability to select one of three pre-set color temperatures – 2700K, 3000K, 3500K, 4000K, and 5000K – convenience at your fingertips.



WET



MULTIPLE TRIM
COLORS



ENERGY STAR



ETL
Intertek



IC
RATED




T24
JA8
CERTIFIED



AIR TIGHT



COLOR TEMPERATURE

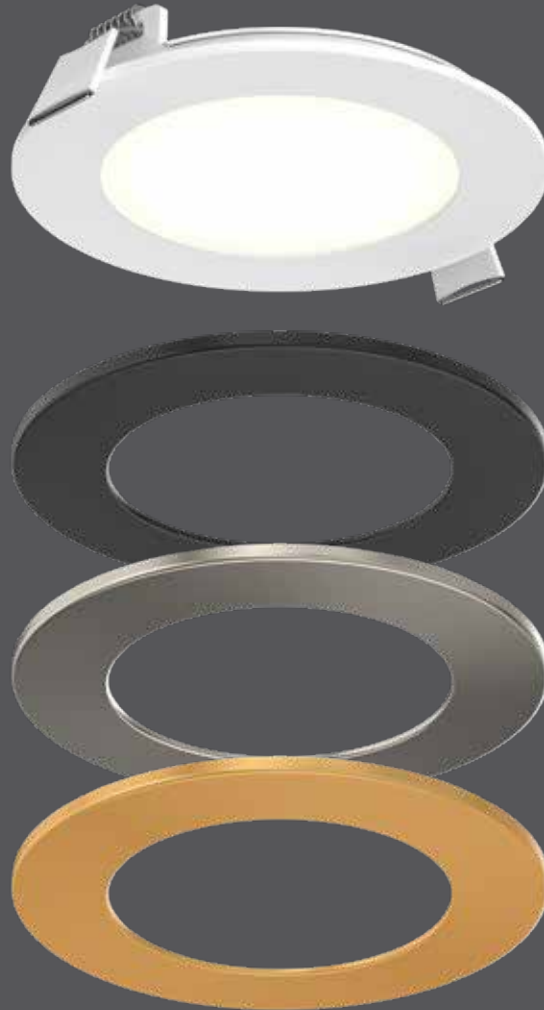

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
SPN4-CC	4"	11 W	800 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming
SPN6-CC	6"	14 W	1100 lm				

Specifications

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 Minimal heat emission
 Aluminum construction
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Over 50,000 hours of service life
 3 interchangeable trim colors included
 Switch-selectable CCT: 2700 K/3000 K/3500 K/4000 K/5000 K
 110° beam angle
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

Accessories

- RFP-UNI**
Universal rough-in plate
- RFP-46**
Rough-in plate for 4" and 6" models
- 5000-EXT8FT**
8-foot extension cable
- 5000-EXT20FT**
20-foot extension cable


Multi-voltage ⚡



This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SPN4-CC

Ø4-1/4" 

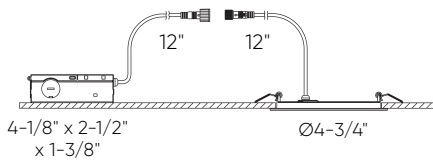

SPN6-CC

Ø6-1/2" 