

# Mystique square

If you are looking for a sleek, attractive LED option for your ceilings, then our color-changing panel light with interchangeable trims is the perfect choice. With the flick of a switch, you have the ability to select one of three pre-set color temperatures – 2700K, 3000K, 3500K, 4000K, and 5000K – convenience at your fingertips.



WET



MULTIPLE TRIM  
COLORS



ENERGY STAR



Intertek



IC  
RATED




JA8  
CERTIFIED



AIR TIGHT



COLOR TEMPERATURE

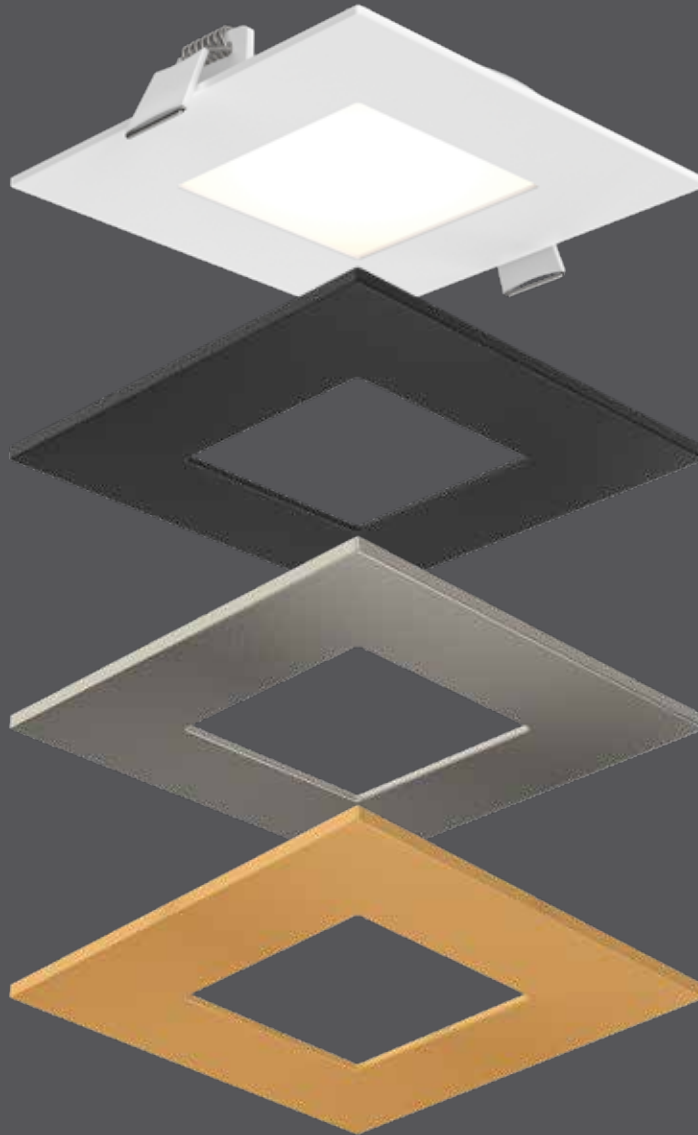

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
<b>SPN4SQ-CC</b>	4"	11 W	800 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming
<b>SPN6SQ-CC</b>	6"	14 W	1100 lm				

### Specifications

Every fixture includes a junction box with integrated dimmable driver  
 Can be daisy chained  
 Minimal heat emission  
 Aluminum construction  
 IC certification (suitable for direct contact with insulation)  
 Air-tight certified as per ASTM E283-04  
 Over 50,000 hours of service life  
 3 interchangeable trim colors included  
 Switch-selectable CCT: 2700 K/3000 K/3500 K/4000 K/5000 K  
 110° beam angle  
 Suitable for wet locations  
 Refer to website for dimmer compatibility  
 Ideal operating temperature: -20° to 40° C  
 5-year warranty

### Finish

- **BK** Black
- **GD** Gold
- **SN** Satin Nickel
- **WH** White

### Accessories

- RFP-UNI**  
Universal rough-in plate
- RFP-46**  
Rough-in plate for 4" and 6" models
- REC-CC-EXT8FT**  
8-foot extension cable
- REC-CC-EXT20FT**  
20-foot extension cable

### Multi-voltage ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.



### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



**SPN4SQ-CC**

Ø4-1/4" 

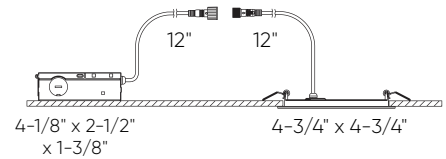

**SPN6SQ-CC**

Ø6-1/2" 