RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.











CUI UD TEMDED VIIIE







IC RATED

T24 JA8 CERTIFIED









RGR

COLOR TEMPERATURE







IC RATED


T24 JA8 CERTIFIED





When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options 🖟
RGR1-CC	1"	6 W	450 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V TRIAC dimming
RGR2-CC	2"	8 W	600 lm			
RGR2HP-CC	2"	15 W	1080 lm			
RGR2SQ-CC	2"	8 W	600 lm			V: 120/277/347V 0-10V dimming (Check for availability)
RGR4-CC	4"	14 W	1100 lm			
RGR4HP-CC	4"	20 W	1560 lm			
RGR4SQ-CC	4"	15 W	1100 lm			
RGR6-CC	6"	20 W	1600 lm			
RGR6SQ-CC	6"	20 W	1600 lm			

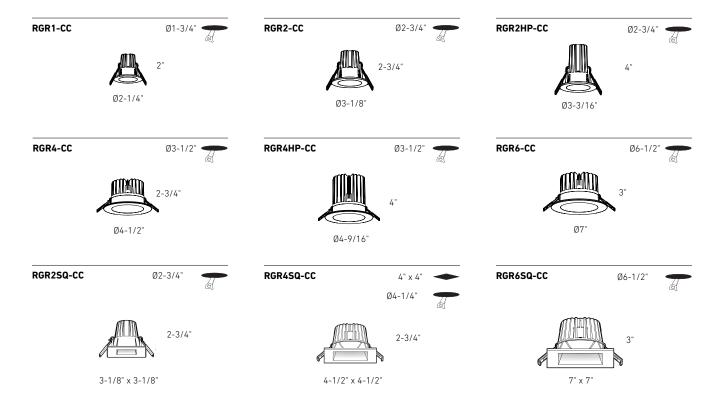

Specifications

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained (4" and 6" models only) Aluminum construction Switch-selectable CCT 40° beam angle 5-year warranty

Finish

BK Black

Satin Nickel

WH White

Accessories

RFP-01

Rough-in plate for RGR1

RFP-23

Rough-in plate for RGR2, RGR2HP, RGR2SQ

RFP-35

Rough-in plate for RGR4, RGR4HP

RFP-46

Rough-in plate for RGR6, RGR4SQ & RGR6SQ

RFP-UNI

Universal rough-in plate for RGR2, RGR2HP, RGR2SQ, RGR4HP, RGR4SQ, RGR6, RGR6SQ

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage(V) ₽

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.