NEW


PIVOT


When searching for lighting flexibility, look no further than our 3° , 4° & 6° flat gimbal LED downlights. With powerful lumen output and the ability to direct light with a 360° rotation and a 90° tilt angle, this product will meet your every need.








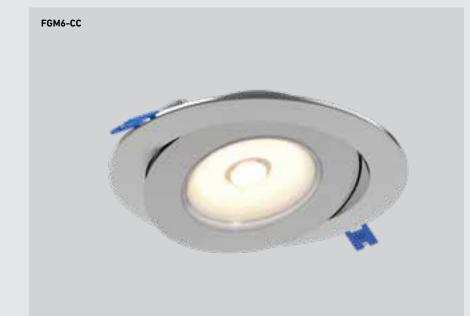





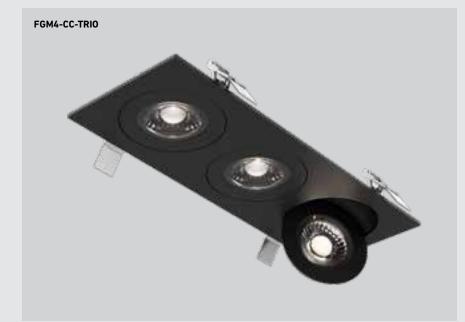



COLOR TEMPERATURE*















*Not available for model FGM4-3K **Models FGM3-3k, FGM3-CC, FGM4-CC, and FGM4SQ-CC only



PIVOT

Recessed | dals.com 62

When searching for lighting flexibility, look no further than our 4-inch square flat gimbal LED downlight. With a powerful lumen output and the ability to direct light through a 360° rotation and a 90° tilt angle, this product will meet all your lighting needs.





COLOR TEMPERATURE*



90° SWIVEL/DIRECTIONAL





T24 JA8 CERTIFIED






Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options 🖣
FGM4-3K	4"	9 W	700 lm	90	3000 K	120V TRIAC dimming
FGM2-CC	2"	6 W	500 lm		2700, 3000, 3500, 4000, 5000 K	or
FGM3-CC	3"	6 W	570 lm			
FGM4-CC	4"	9 W	800 lm			V: 120/277/347V 0-10V dimming (Check for availability)
FGM6-CC	6"	14 W	1050 lm			
FGM4SQ-CC	4"	9 W	800 lm			
FGM4-CC-DUO	2x 4"	18 W	1475 lm			
FGM4-CC-TRIO	3x 4"	27 W	2300 lm			

*Not available for model FGM4-3K **Models FGM3-3k, FGM3-CC, FGM4-CC, and FGM4SQ-CC only

FGM2-CC Ø2-3/4"

Ø3-1/8"











FGM6-CC

/4"


FGM4SQ Ø4-1/4"

4-15/16"


FGM4-CC-DUO

8-5/8" X 4-3/4"





FGM4-CC-TRIO 13" X 4-5/8"



Specifications

Every fixture includes a junction box with integrated dimmable driver

Can be daisy chained

90° tilting, 360° rotation

Aluminum construction Switch-selectable CCT

Low profile

40° beam spread

5-year warranty

Finish

BK Black

SN Satin Nickel (FGM4, FGM6 only)
WH White

Accessories

RFP-UNI

Universal rough-in plate

RFP-23

Rough-in plate for 3" model

RFP-46

Rough-in plate for 4" and 6" models

RFP-DUO

Rough-in plate for FGM4-CC-DU0

RFP-TRIO

Rough-in plate for FGM4-CC-TRIO

REC-3K-EXT8FT

8-foot extension cable for FGM4-3K

REC-3K-EXT20FT)

20-foot extension cable for FGM4-3K

REC-CC-EXT8FT

8-foot extension cable for FGMX-CC models

REC-CC-EXT20FT

20-foot extension cable for FGMX-CC models

Multi-voltage (V) 🧗

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.