


# DELTA

CFLEDSQ10-CC


10" square flush mount



PROJECT	
DATE	
TYPE	
QTY	
NOTES	

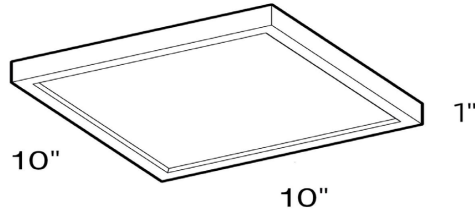

## LIGHT DISTRIBUTION

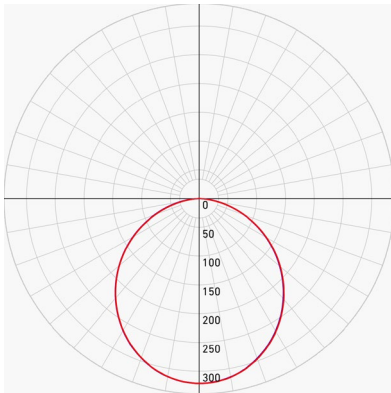

Distance from luminaire	FC at Nadir	Diameter
4'	25.1 fc	12'-8"
6'	11.1 fc	19'
8'	6.3 fc	25'-3"
10'	4.0 fc	31'-7"
12'	2.8 fc	37'-11"

\*measured at 3000k

## SPECS

<b>Watts (W)</b>	17	
<b>Delivered lumens*</b>	1200	
<b>Voltage (v)</b>	120	
<b>CRI</b>	94	
<b>TM-30</b>	Rf: 90	Rg: 103
<b>Binning</b>	3 SDCM	
<b>Beam angle (deg)</b>	110	
<b>UGR</b>	29	
<b>LED model</b>	SMD 2835	
<b>Light direction</b>	Down	
<b>Dimming</b>	Triac / ELV	
<b>Mounting</b>	Twist bracket	
<b>Color temperature</b>	2700K/3000K/3500K/4000K/5000K	

## ELECTRICAL DETAILS

<b>Location</b>	Wet - covered ceiling	
<b>Environment</b>	Indoor/Outdoor	
<b>Operating temp. (° C)</b>	-20	to 40
<b>IP rating</b>	IP44	
<b>Input voltage (V)</b>	108-120	
<b>Input current (mA)</b>	149	
<b>Output voltage (V)</b>	-	
<b>Output current (mA)</b>	-	
<b>Power factor (%)</b>	94	
<b>Driver type</b>	Driver on board	
<b>THD</b>	≤ 30%	
<b>Lifetime @ L70</b>	>50 000hrs	

## CONSTRUCTION

<b>Lens material</b>	Polycarbonate	<b>Finish type</b>	Painted
<b>Optic type</b>	Frosted	<b>Housing material</b>	Aluminum

## ORDERING GUIDE

CFLEDSQ10-CC	-	Finish
<b>WH</b> - White	<input type="checkbox"/>	
<b>BK</b> - Black	<input type="checkbox"/>	
<b>SN</b> - Satin nickel	<input type="checkbox"/>	

## CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Title 24-JA8			
Compliant to	FCC Title 47 Part 15; Class B		
ICES-005 Issue 5			



**CANADA**  
80, Blvd. de la Seigneurie E.  
Blainville, Quebec J7C 4N1

**USA**  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

1 877.430.1818  
info@dals.com  
dals.com

**WHAT'S IN THE BOX**

LED flush mount fixture  
 Mounting bracket  
 Mounting hardware  
 Wire nuts  
 Instruction sheet

**ACCESSORIES****ADAPTORS****WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

**RECOMMENDED DIMMER LIST\*\***

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	0	100	15
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	0	100	9
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	0	100	9
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	0	97	9
Lutron	DVLV-600P-BL	Magnetic Low Voltage, 600VA / 450W Single-Pole	1	100	26
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	0	96	9
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	0	71	18
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	0	100	18
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	0	100	26
Legrand	ADTP703TUM4*	Triac,450W Dimmable CFL/LED	0	76	26
Legrand	ADPD453LM2*	Triac,450W Dimmable CFL/LED	0	100	26
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	7
Control 4	C4-FPD120-WH	Triac, 200W LED	0	100	12
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	0	100	9
tp-link	HS220*	Triac, 150 W, Dimmable LED (MLV)	0	100	9
Leviton	RDL06-10Z	Triac, 150W LED & CFL	5	100	9

\*With low-end adjustment feature. \*\*Some dimmers may produce minimal buzzing noise.

