



MODEL **CFLEDR14-CC**
NAME **DELTA SERIES**
14" Round Flush Mount

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and includes five switch-selectable CCT settings.

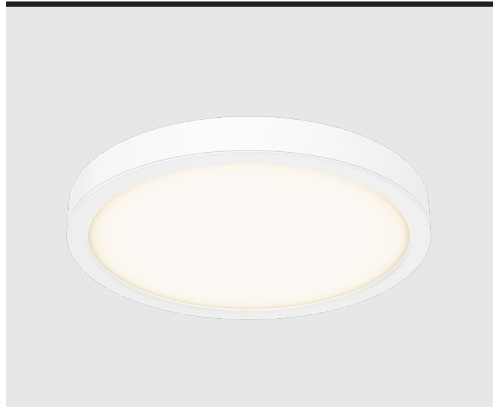

PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

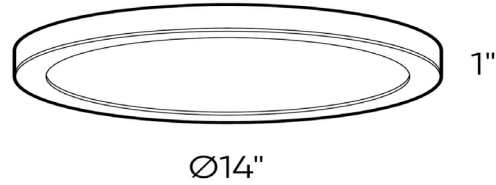


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
14"	26W	1700lm	2700K 3000K 3500K 4000K 5000K	90	120V	110°	Straight	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin nickel <input type="radio"/> Gold

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION

Lens Frosted	Finish type Paint (BK, WH) Electroplate (SN, BB)	Type of LED Edge lit SMD
Lens material PC	Housing material Cast aluminum	Mounting Twist bracket

RATINGS

Placement Indoor/outdoor	Lifespan 50,000 hrs.	IP rating IP44
Location Wet (Covered ceiling mounted only)	Certifications ETL, JA8, FCC, ES	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

ACCESSORIES

-

ADAPTERS

-



ELECTRICAL DETAILS	Input voltage 108-120V	Output current -	Power factor 90%	Driver type Driver on board
	Output voltage -	LED model # 2835	THD harmonic distortion <30%	Binning type 3 SDCM

FEATURES	Integrated dimmable driver	Smooth 360° wide spread	Switch-selectable CCT: 2700K/ 3000 K/ 3500 K/ 4000 K/ 5000 K
	Superior LED performance and lifespan	Minimal heat emission Edge-lit technology	

WARRANTY DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	Compatible	0	100	10
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	3	95	6
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	0	95	6
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	0	86	6
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	0	90	10
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	Compatible	0	97	10
Leviton	"6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	4	91	6
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	Compatible	0	91	17
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	IPL06-10Z*	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	Compatible	0	100	12
Legrand	RHL373PW*	Triac, 250W LED	Compatible	1	89	10
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	5
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	98	8
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	Compatible	0	100	6
tp-link	HS220*	Triac, 150 W, Dimmable LED (MLV)	Compatible	0	100	6

* Minimal buzzing noise may occur with some dimmers