



**MODEL NAME** **CFLEDR14-CC**  
**DELTA SERIES**  
**14" Round Flush Mount**

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and includes five switch-selectable CCT settings.

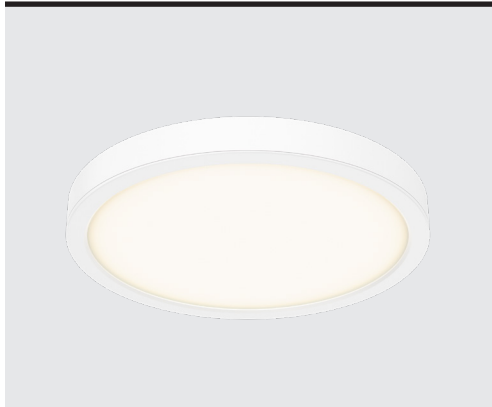

<b>PROJECT:</b>	<b>TYPE:</b>
<b>DATE:</b>	<b>QTY:</b>
<b>NOTES:</b>	

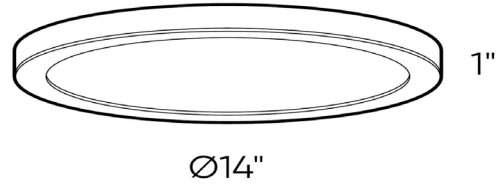


**QUICK SPECS**

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
14"	26W	1600lm	2700K 3000K 3500K 4000K 5000K	90	120V	110°	Straight	<input type="radio"/> White <input type="radio"/> Black <input type="radio"/> Satin nickel <input type="radio"/> Gold

\*Lumen output measured at 3000K

**LIGHT DISTRIBUTION**



**CONSTRUCTION**

<b>Lens</b> Frosted	<b>Finish type</b> Paint (BK, WH) Electroplate (SN, BB)	<b>Type of LED</b> Edge lit SMD
<b>Lens material</b> PC	<b>Housing material</b> Cast aluminum	<b>Mounting</b> Twist bracket

**RATINGS**

<b>Placement</b> Indoor/outdoor	<b>Lifespan</b> 50,000 hrs.	<b>IP rating</b> IP44
<b>Location</b> Wet (Covered ceiling mounted only)	<b>Certifications</b> ETL, JA8, FCC, ES	<b>Operating temperature</b> -20° to 40° C

**WHAT'S IN THE BOX**

- LED flush mount fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

**ACCESSORIES**

-

**ADAPTERS**

-



**ELECTRICAL  
DETAILS**

**Input voltage**  
108-120V

**Output current**  
206mA

**Power factor**  
90%

**Driver type**  
Constant current

**Output voltage**  
126V

**LED model #**  
2835

**THD harmonic  
distortion**  
<30%

**Binning type**  
3 SDCM

**FEATURES**

Integrated dimmable driver

Smooth 360° wide spread

Switch-selectable CCT:  
2700K/ 3000 K/ 3500 K/  
4000 K/ 5000 K

Superior LED performance and lifespan

Minimal heat emission  
Edge-lit technology

**WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).

**RECOMMENDED DIMMER LIST\***

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	0	100	10
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	94	6
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0	63	12
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	0	93	10
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	0	100	10
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	0	100	6
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0	100	12
Legrand	RHL373PW	Triac, 250W LED	Compatible	0	92	10
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	5
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	100	8

\* Minimal buzzing noise may occur with some dimmers