

DELTA

CFLEDR10-CC

10" round flush mount




PROJECT

DATE


TYPE

QTY

NOTES

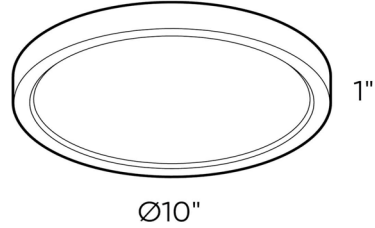

LIGHT DISTRIBUTION

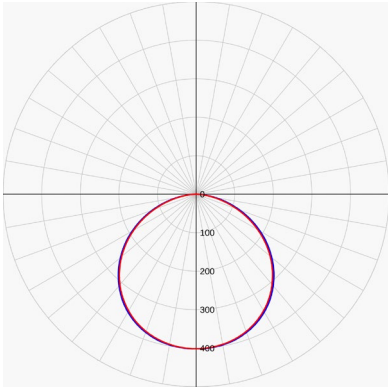

Distance from luminaire	FC at Nadir	Diameter
4'	25.1 fc	12'-8"
6'	11.1 fc	19'
8'	6.3 fc	25'-3"
10'	4.0 fc	31'-7"
12'	2.8 fc	37'-11"

*measured at 3000k

SPECS

Watts (W)	17	
Delivered lumens*	1200	
Voltage (v)	120	
CRI	94	
TM-30	Rf: 91	Rg: 102
Binning	3 SDCM	
Beam angle (deg)	110	
UGR	29	
LED model	SMD 2835	
Light direction	Down	
Dimming	Triac / ELV	
Mounting	Twist bracket	
Color temperature	2700K/3000K/3500K/4000K/5000K	

CONSTRUCTION

Lens material	Polycarbonate	Finish type	Painted
Optic type	Frosted	Housing material	Aluminum

ELECTRICAL DETAILS

Location	Wet - covered ceiling		
Environment	Indoor/Outdoor		
Operating temp. (° C)	-20	to	40
IP rating	IP44		
Input voltage (V)	108-120		
Input current (mA)	151		
Output voltage (V)	-		
Output current (mA)	-		
Power factor (%)	96		
Driver type	Driver on board		
THD	≤ 30%		
Lifetime @ L70	>50 000hrs		

ORDERING GUIDE

CFLEDR10-CC

-

Finish

WH - White	<input type="checkbox"/>
BK - Black	<input checked="" type="checkbox"/>
SN - Satin nickel	<input type="checkbox"/>
GD - Gold	<input type="checkbox"/>

CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Title 24-JA8			
Compliant to	FCC Title 47 Part 15; Class B		
ICES-005 Issue 5			



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

LED flush mount fixture
 Mounting bracket
 Mounting hardware
 Wire nuts
 Instruction sheet

ACCESSORIES**ADAPTORS****WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST**

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	0	100	15
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	3	100	9
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	3	100	9
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	0	95	9
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	0	95	9
Lutron	Caseta IPD-10NXD-WH*	Triac, LED—up to 250 W	5	94	15
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	5	100	9
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	5	100	9
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	0	100	9
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	0	100	18
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	0	100	26
Legrand	ADTP703TUM4*	Triac, 450W Dimmable CFL/LED	9	78	26
Legrand	ADPD453LM2*	Triac, 450W Dimmable CFL/LED	0	100	26
Legrand	RHL373PW*	Triac, 250W LED	0	99	15
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	7
Control 4	C4-FPD120-WH	Triac, 200W LED	0	100	12
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	0	100	9
tp-link	HS220*	Triac, 150 W, Dimmable LED (MLV)	0	100	9
Leviton	RDL06-10Z	Triac, 150W LED & CFL	8	100	9

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

