


DELTA

CFLEDR14-CC


14" round flush mount



PROJECT	
DATE	
TYPE	
QTY	
NOTES	

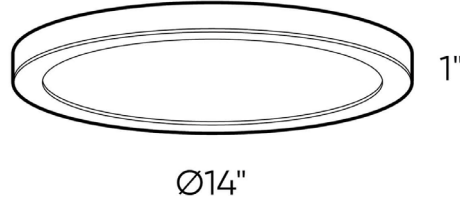

LIGHT DISTRIBUTION

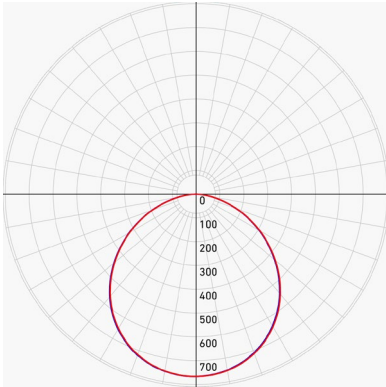

Distance from luminaire	FC at Nadir	Diameter
4'	38.8 fc	12'-8"
6'	17.2 fc	19'
8'	9.7 fc	25'-3"
10'	6.2 fc	31'-7"
12'	4.3 fc	37'-11"

*measured at 3000k

SPECS

Watts (W)	26	
Delivered lumens*	1700	
Voltage (v)	120	
CRI	92	
TM-30	Rf: 90	Rg: 102
Binning	3 SDCM	
Beam angle (deg)	110	
UGR	30	
LED model	SMD 2835	
Light direction	Down	
Dimming	Triac / ELV	
Mounting	Twist bracket	
Color temperature	2700K/3000K/3500K/4000K/5000K	

CONSTRUCTION

Lens material	Polycarbonate	Finish type	Painted
Optic type	Frosted	Housing material	Aluminum

ELECTRICAL DETAILS

Location	Wet - covered ceiling		
Environment	Indoor/Outdoor		
Operating temp. (° C)	-20	to	40
IP rating	IP44		
Input voltage (V)	108-120		
Input current (mA)	234		
Output voltage (V)	-		
Output current (mA)	-		
Power factor (%)	92		
Driver type	Driver on board		
THD	≤ 30%		
Lifetime @ L70	>50 000hrs		

ORDERING GUIDE

CFLEDR14-CC	-		Finish
			WH - White
			BK - Black
			SN - Satin nickel
			GD - Gold

CERTIFICATIONS

ETL listed	UL-1598	and	CSA C22.2 No. 250.0
Title 24-JA8			
Compliant to	FCC Title 47 Part 15; Class B		
ICES-005 Issue 5			



CANADA
80, Blvd. de la Seigneurie E.
Blainville, Quebec J7C 4N1

USA
4383, NW 124th Ave.,
Coral Springs, Florida 33065

1 877.430.1818
info@dals.com
dals.com

WHAT'S IN THE BOX

LED flush mount fixture
 Mounting bracket
 Mounting hardware
 Wire nuts
 Instruction sheet

ACCESSORIES**ADAPTORS****WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST**

BRAND	MODEL	DIMMER SPECS	DIMMING RANGE %		MAX LOAD (units)
			MIN	MAX	
Dals	SM-DIMSW Smart Dimmer*	Triac, 250W LED/CFL	0	100	10
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	3	95	6
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	0	95	6
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	0	86	6
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	0	90	10
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	0	97	10
Leviton†	6672-1LW	Triac, 150W Dimmable CFL/LED	4	91	6
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	0	91	17
Leviton	6674*	Triac, 150 W Dimmable CFL/LED	0	100	6
Leviton	†PL06-10Z*	Triac, 150 W Dimmable CFL/LED	0	100	6
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	0	100	6
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	0	100	12
Legrand	RHL373PW*	Triac, 250W LED	1	89	10
Control 4	C4-APD120-WH	ELV, 120W LED	0	100	5
Control 4	C4-FPD120-WH	Triac, 200W LED	0	98	8
Commercial Electric	HPDA311CWB*	Triac, 150W LED & CFL	0	100	6
tp-link	HS220*	Triac, 150 W, Dimmable LED (MLV)	0	100	6
Leviton	RDL06-10Z	Triac, 150W LED & CFL	8	100	6

*With low-end adjustment feature. **Some dimmers may produce minimal buzzing noise.

