



# DALS LIGHTING

Canada  
80, de la Seigneurie blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** CFLEDR18-CC-V

**NAME** Delta


18" Round Flush Mount

Our LED flush mounts incorporate Edge-Lit technology, eliminating hot spots or glare. Can be installed inside or outside and offer 5 switch-selectable CCT settings – 2700 K, 3000 K, 3500 K, 4000 K, and 5000 K.


**PROJECT** \_\_\_\_\_ **TYPE** \_\_\_\_\_

**DATE** \_\_\_\_\_ **QTY** \_\_\_\_\_

**NOTES**  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

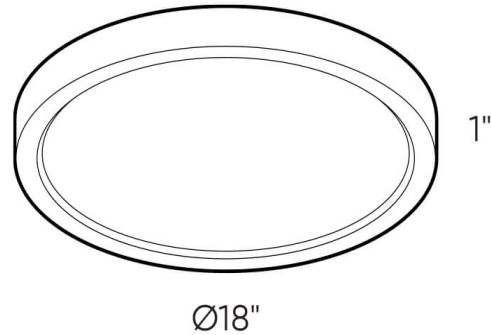

### LIGHT DISTRIBUTION

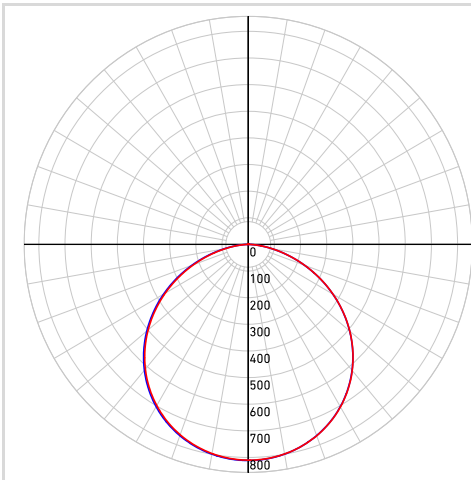

\*Lumen output measured at 3000k

### QUICK SPECS

<b>Size</b>	18"
<b>Watts (W)</b>	30
<b>Delivered lumens*</b>	2400
<b>CRI</b>	90
<b>Voltage (v)</b>	120/277/347
<b>Beam angle (deg)</b>	110
<b>Mounting</b>	Twist bracket
<b>Lifespan (hrs)</b>	50 000
<b>Binning</b>	3 SDCM
<b>LED model</b>	SMD 2835
<b>Light direction</b>	Bas
<b>Color temperature</b>	2700K,3000K,3500K,4000K,5000K

### ELECTRICAL DETAILS

<b>Environment</b>	Wet - Covered ceiling mounted only
<b>Location</b>	Indoor / Outdoor
<b>Operating temp. (° C)</b>	-20 to 40
<b>IP rating</b>	IP44
<b>Input voltage (V)</b>	120-347
<b>Output voltage (V)</b>	-
<b>Output current (mA)</b>	-
<b>Power factor</b>	90
<b>Driver type</b>	Driver on board
<b>THD</b>	<30%
<b>Certifications</b>	ETL, FCC, ICES, T24/JA8, ADA

### ORDERING GUIDE

CFLEDR18-CC-V - \_\_\_\_\_  
*Finish*

**WH** - White ○

**BK** - Black ●

### CONSTRUCTION

<b>Lens material</b>	PC
<b>Lens type</b>	Frosted
<b>Finish type</b>	Painted
<b>Housing material</b>	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
<ul style="list-style-type: none"> <li>LED flush mount fixture</li> <li>Mounting bracket</li> <li>Mounting hardware</li> <li>Wire nuts</li> <li>Instruction sheet</li> </ul>		

**RECOMMENDED DIMMER LIST\***

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Lutron	DVSTV (0-10 V Controls)*	960W, 8A, 120-277 V	Compatible	2	95	31
Leviton	IP710-LFZ (0-10 V Controls)	1200VA, 10A LED, 120-277V	Compatible	0	100	38
Leviton	ZS057-30Z (0-10 V Controls)	1388VA, 347VAC / 4A	Compatible	0	100	25

\*With Low-End Adjustment Feature  
 Minimal buzzing noise may occur with some dimmers

**WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.