

BROOKLYN

The key design element of our LED square cylinder is the removable lens, which allows for three distinctive styles during installation.



LEDWALL-B

3000k

COLOR TEMPERATURE



WET


ADA
COMPLIANT

T24
JA8
CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-B	11-3/4"	28 W	2100 lm	90	3000 K	120 V - 277 V

LEDWALL-B

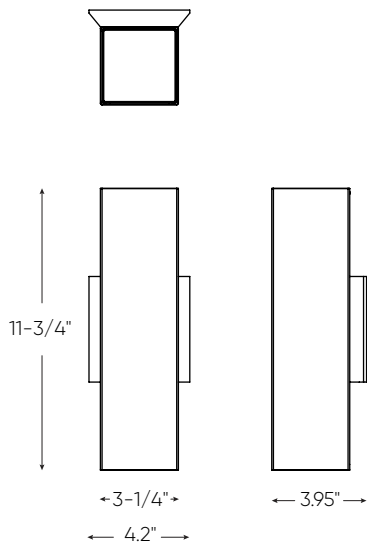

Specifications

Cylindrical housing made of extruded aluminum

Cylinder comes with 3 optical options:

- Bright aluminum reflector that provides a 45° beam spread
- Frosted glass lens to allow a wider beam spread
- Die-cast aluminum cap to allow a down light only version

Baked powder paint coat for a highly durable finish

5-year warranty

Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALSi representative for more information.