

DALS LIGHTING

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com


MODEL NAME

LEDWALL-A


ADEN

Round Cylinder With Multiple Lighting Options

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.

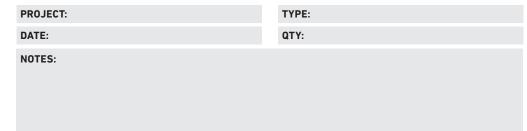






		ECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
4"	4" 29W	2100lm 3000K	3000K	90 120	120V-277V	45° or 115°	Up and down	Black
						White		
								Silver grev

^{*}Lumen output measured at 3000K




CONSTRUCTION	Lens Clear or frosted	Finish type Powder coated	Type of LED COB	
	Lens material Glass	Housing material Aluminum	Mounting Octo Jbox	
RATINGS	Placement Indoor/outdoor	Lifespan 50,000 hrs.	IP rating IP65	

WHAT'S IN THE BOX

LED wall sconce fixture Mounting bracket Mounting hardware Wire nuts Instruction sheet

ACCESSORIES





80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

4383, NW 124th Ave.,

Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com



ELECTRICAL DETAILS

Input voltage 120-277V

Output current 700mA

Power factor 90%

Driver type Constant current

Output voltage 24-42V

LED model # COB

THD harmonic distortion <20%

Binning type 3 SCDM

junction box

FEATURES

Cylinder comes with 3 optical options: • Bright aluminum reflector that provides a 45° beam spread • Frosted glass lens

to allow a wider beam spread

• Die-cast aluminum cap to allow a down light only version

Cylindrical housing made of extruded aluminum

The LED board is sealed with a clear tempered

glass lens to ensure weatherproof operation

shallow junction boxes Driver installs in

Not compatible with

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*							
BRAND	MODEL#	DIMMER SPECS	GRADE	DIMMING RANGE (%) MIN MAX	MAX LOAD		
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	7 100	10		
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	1 100	9		
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	3 100	9		
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0 100	4		
Lutron	DVSTV (0-10 V Controls)	960W, 8 A, 120-277V	Compatible	12 93	33		

^{*} Minimal buzzing noise may occur with some dimmers