


RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.




CERTIFIED




RGR

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.



- WET
- LOW-GLARE
- AIR TIGHT
- IC RATED
- T24 JAB CERTIFIED
- ETL Intertek

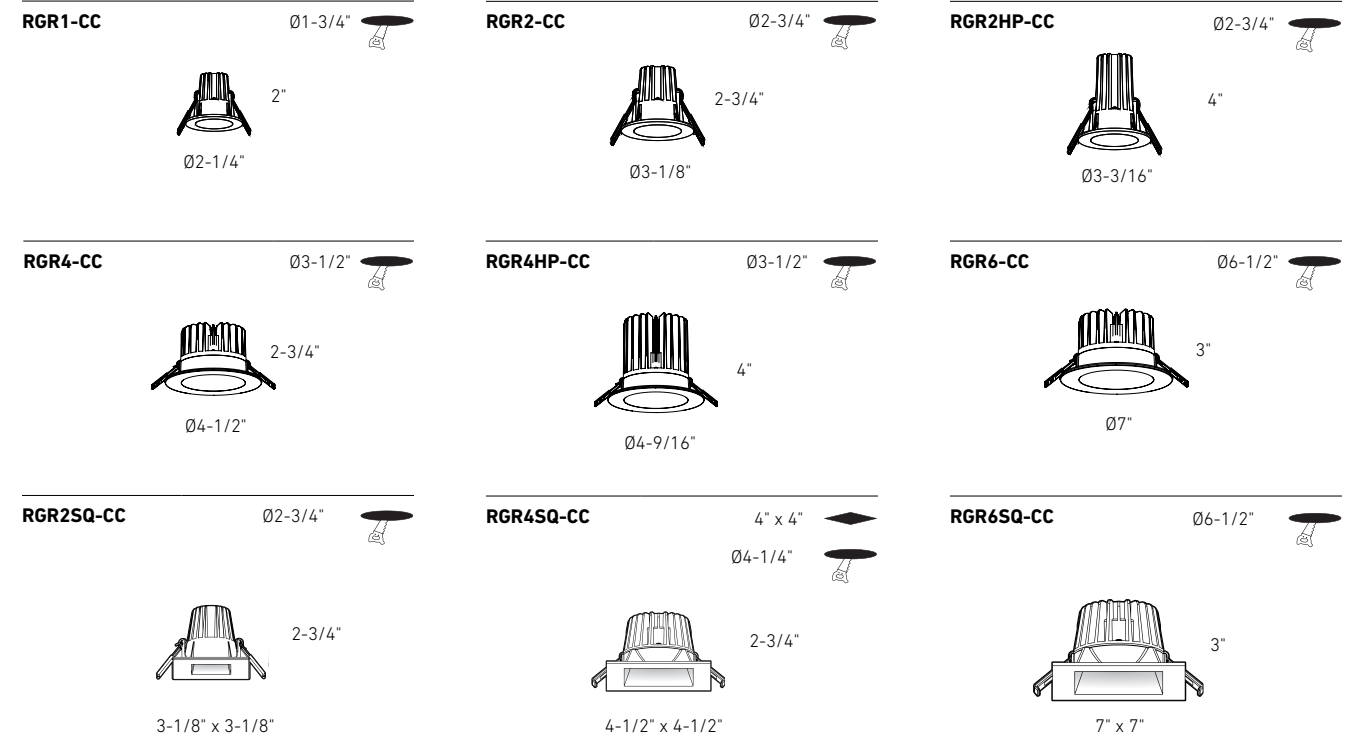

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
RGR1-CC	1"	6 W	450 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
RGR2-CC	2"	8 W	600 lm			or
RGR2HP-CC	2"	15 W	1080 lm			V: 120 / 277 / 347V
RGR2SQ-CC	2"	8 W	600 lm			0-10V dimming (Check for availability)
RGR4-CC	4"	14 W	1100 lm			
RGR4HP-CC	4"	20 W	1560 lm			
RGR4SQ-CC	4"	15 W	1100 lm			
RGR6-CC	6"	20 W	1600 lm			
RGR6SQ-CC	6"	20 W	1600 lm			

Specifications

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained (4" and 6" models only)
 Aluminum construction
 Switch-selectable CCT
 40° beam angle
 5-year warranty

Finish

- **BK** Black
- **SN** Satin Nickel
- **WH** White

Accessories

- RFP-01**
Rough-in plate for RGR1
- RFP-23**
Rough-in plate for RGR2, RGR2HP, RGR2SQ
- RFP-35**
Rough-in plate for RGR4, RGR4HP
- RFP-46**
Rough-in plate for RGR6, RGR4SQ & RGR6SQ
- RFP-UNI**
Universal rough-in plate for RGR2, RGR2HP, RGR2SQ, RGR4HP, RGR4SQ, RGR6, RGR6SQ
- REC-CC-EXT8FT**
8-foot extension cable
- REC-CC-EXT20FT**
20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.