ETCH

0 0 0 0 0 2700k 3000k 3500k 4000k 5000l

COLOR TEMPERATUR

The Etch range of circular recessed downlights, characterized by a deep-set LED position, provides a functional solution to general lighting without the uncomfortable glare.









RATED

T24 JA8 CERTIFIED





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options 🖟
DDP4-CC	4"	15 W	1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V TRIAC dimming
DDP6-CC	6"	20 W	1500 lm			or
						V: 120/277/347V 0-10V dimming (Check for availability)

DDP4-CC

Ø4-1/4"






DDP6-CC

Ø6-1/2"





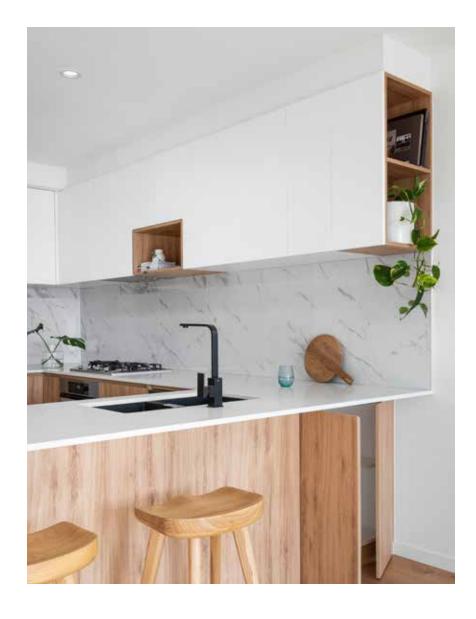

Specifications

Every fixture includes a junction box with an integrated driver

Can be daisy chained

Smooth 360° wide spread

125° beam angle

Frosted lens

Edge lit technology

Cast aluminum construction

Switch-selectable CCT

5-year warranty

Finish



WH White

Accessories

RFP-46

Rough-in plate

RFP-UNI

Universal rough-in plate

DDP4-TRIM-BK

4" recessed panel trim in black

DDP6-TRIM-BK

6" recessed panel trim in black

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable

Multi-voltage (V) 🦫

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.