



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL DDP6-CC

NAME Etch

6" Deep regressed panel 5CCT

The Etch range of circular recessed downlights, characterised by a deep-set LED position, provides a functional solution to general lighting without the uncomfortable glare.




PROJECT

TYPE


DATE

QTY

NOTES

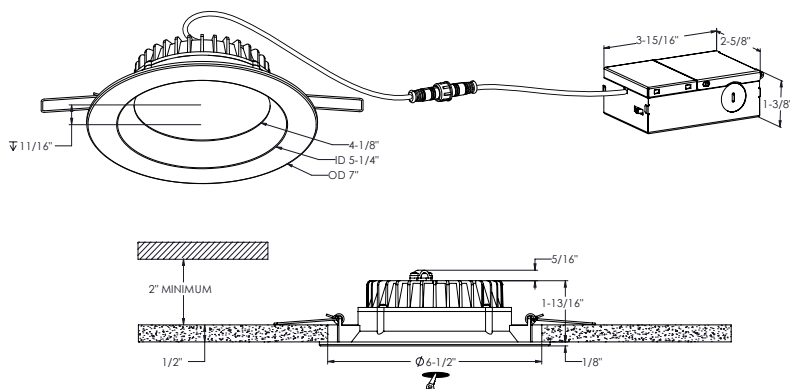

LIGHT DISTRIBUTION

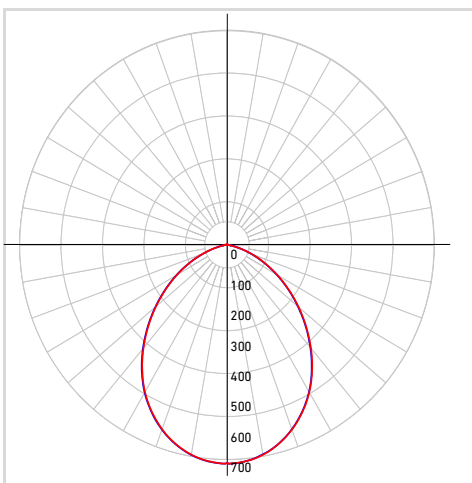

*Lumen output measured at 3000k

QUICK SPECS

Size	6"
Watts (W)	20
Delivered lumens*	2045
CRI	90
Voltage (v)	120
Beam angle (deg)	125
Cut hole size (in)	6-1/2"
Lifespan (hrs)	50 000
FT rating	FT6
Binning	3 SDCM
LED model	SMD 3030
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Wet
Location	Indoor/Outdoor
Operating temp. (° C)	-20 to 40
IP rating	50 000
Input voltage (V)	108-135
Output voltage (V)	30-42
Output current (mA)	530
Power factor (%)	99
Driver type	Constant current
THD	0.154
Certifications	ETL, FCC, ICES, ES IC, ASTM E283-04, T24/JA8

ORDERING GUIDE

DDP6-CC	-		-	
		Voltage		Finish
		BLANK - 120v Triac dimming		WH - White
		V - 120-277-347V 0-10v dimming		

CONSTRUCTION

Lens material	Frosted
Optic type	Flat lense
Finish type	Aluminium
Housing material	Acrylic

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- 3x Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

[REC-RFP-6](#)

Rough-in plate

[REC-RFP6](#)

Rough-in plate

[RFP-UNI](#)

Rough-in plate

ADAPTORS

[REC-CC-EXT8FT](#)

96" extension cord for recessed fixtures

[REC-CC-EXT20FT](#)

240" extension cord for recessed fixtures

RECOMMENDED DIMMER LIST*

[illegible]

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.