



## DALS LIGHTING

Canada  
80, de la Seigneurie blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** MSL10-CC

**NAME** Pinpoint

10 Light Microspot Recessed downlight CC

Providing contemporary and functional style to any space, the MSL Recessed Series with its glossy piano-black reflector is available in various styles and features.



**PROJECT**

**DATE**


**TYPE**

**QTY**

### NOTES

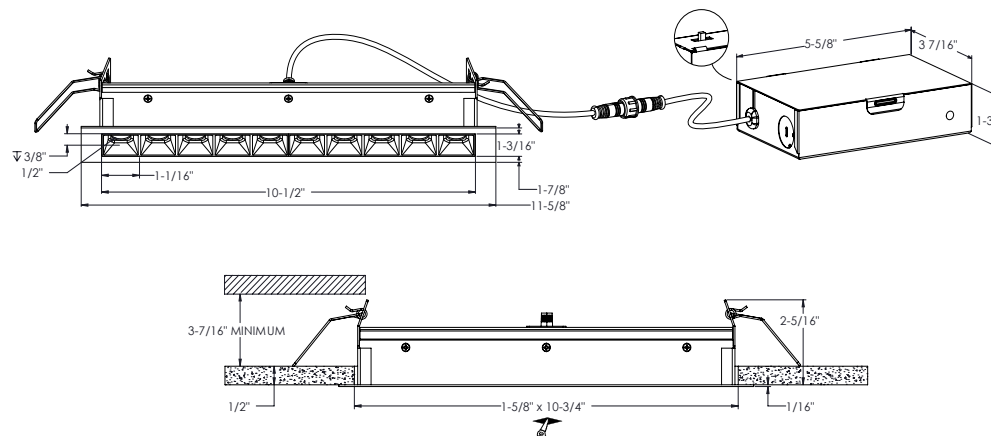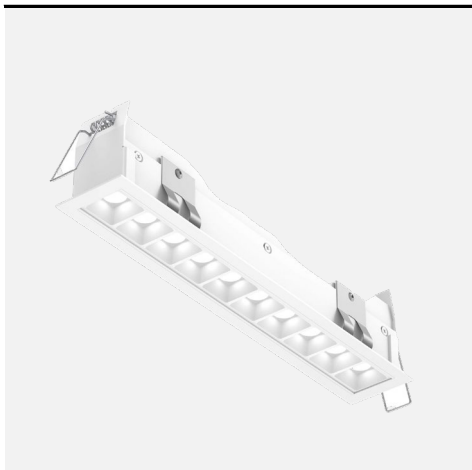

### LIGHT DISTRIBUTION

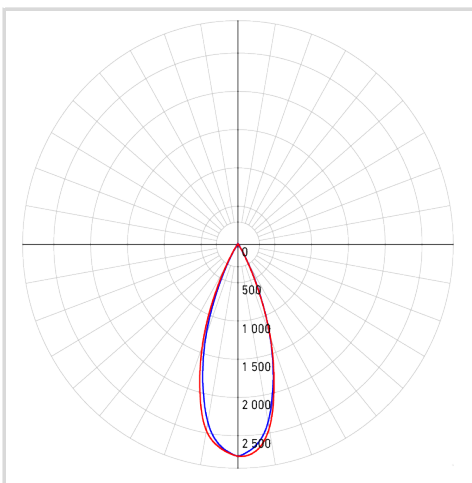

### QUICK SPECS

|                           |                               |
|---------------------------|-------------------------------|
| <b>Size</b>               | 13"                           |
| <b>Watts (W)</b>          | 24                            |
| <b>Delivered lumens*</b>  | 1300                          |
| <b>CRI</b>                | 90                            |
| <b>Voltage (v)</b>        | 120                           |
| <b>Beam angle (deg)</b>   | 30                            |
| <b>Cut hole size (in)</b> | 10-3/4 x 1-5/8                |
| <b>FT rating</b>          | FT6                           |
| <b>UGR</b>                | 4.2                           |
| <b>Binning</b>            | 3 SDCM                        |
| <b>LED model</b>          | SMD 3535                      |
| <b>Color temperature</b>  | 2700K/3000K/3500K/4000K/5000K |
| <b>Certifications</b>     | ETL, FCC, ICES, IC            |

### ELECTRICAL DETAILS

|                              |                  |
|------------------------------|------------------|
| <b>Environment</b>           | Dry              |
| <b>Location</b>              | Indoor           |
| <b>Operating temp. (° C)</b> | -20 to 40        |
| <b>IP rating</b>             | IP44             |
| <b>Input voltage (V)</b>     | 108-135V         |
| <b>Output voltage (V)</b>    | 29               |
| <b>Output current (mA)</b>   | 667              |
| <b>Power factor (%)</b>      | 99               |
| <b>Driver type</b>           | Constant current |
| <b>THD</b>                   | <30%             |
| <b>Lifespan (hrs)</b>        | 50000            |

\*Lumen output measured at 3000k

### ORDERING GUIDE

|          |   |                                          |   |                    |
|----------|---|------------------------------------------|---|--------------------|
| MSL10-CC | - | Voltage                                  | - | Finish             |
|          |   | <b>BLANK</b> - 120v<br>Triac dimming     |   | <b>AWH</b> - White |
|          |   | <b>V</b> - 120-277-347V<br>0-10v dimming |   | <b>BK</b> - Black  |

### CONSTRUCTION

|                         |            |
|-------------------------|------------|
| <b>Lens material</b>    | PC         |
| <b>Optic type</b>       | Clear lens |
| <b>Finish type</b>      | Sandy      |
| <b>Housing material</b> | Aluminum   |

## WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- 3x Push-in wire connectors
- Mounting hardware
- Instruction sheet

## ACCESSORIES

[RFP-MSL10](#)

Drilling plate

**ADAPTORS**

[REC-CC-EXT8FT](#)

96" extension cord for recessed fixtures

[REC-CC-EXT20FT](#)

240" extension cord for recessed fixtures

## RECOMMENDED DIMMER LIST\*

[illegible]

*Minimal buzzing noise may occur with some dimmers*

*Minimal buzzing noise may occur with some dimmers*

## WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).