



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL **2006-WH**
NAME **ACCESS**
6-Inch Round Recessed Panel Light

Our new LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.




PROJECT:

DATE:

NOTES:

TYPE:


QTY:

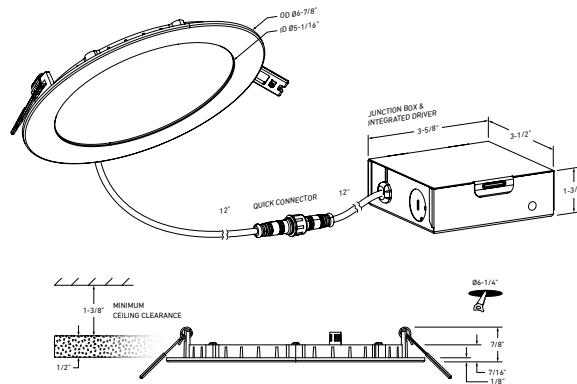

QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
6"	14W	1100lm	3000K	80	120V	110°	○ White

LIGHT DISTRIBUTION

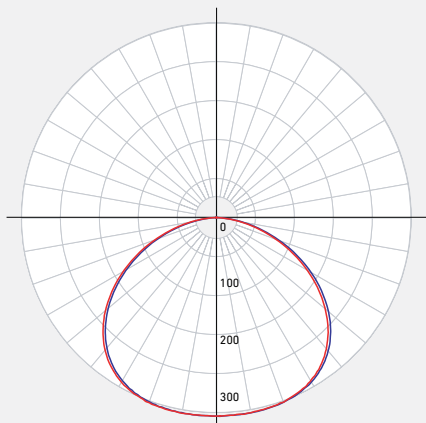

CONSTRUCTION

Lens
Frosted

Lens material
Acrylic

Type of optics
Flat lens

Housing material
Cast aluminum

Type of LED
Edge-lit SMD

Cut hole size
6-1/4"

RATINGS

Placement
Indoor

Location
Damp

Lifespan
35,000 hrs.

Certifications
ETL, FCC, ICES, ES
IC, ASTM E283-04

FT rating
FT4

Operating temperature
-20° to 40° C

WHAT'S IN THE BOX

LED recessed fixture
Junction box
Wire nuts
Mounting hardware
Instruction sheet

COMPATIBLE ACCESSORIES

RFP-UNI
Universal Drilling Plate For 2",
3", 4" and 6" fixtures

RFP-46
Drilling plate for 4" and 6"
fixtures

COMPATIBLE ADAPTERS

REC-EXT108
108" extension cord for
recessed fixtures

REC-EXT230
230" extension cord for
recessed fixtures

ELECTRICAL DETAILS	Input voltage 108-132V	Output current 320mA	Power factor 98%	Driver type Constant current
	Output voltage 36V	LED model # 2835	THD harmonic distortion <30%	Binning type 3 SDCM

FEATURES	Every fixture includes a junction box with an integrated driver	Superior LED performance and lifespan	Minimal heat emission	Very low profile
	Can be daisy chained	Smooth 360° wide spread	Frosted lens	Edge lit technology

WARRANTY	DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com .
-----------------	--

RECOMMENDED DIMMER LIST*					
BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Lutron	DVELV-300P-WH	Electronic Low-Voltage, 300W	Compatible	Min: 7 / Max: 100	21
Lutron	MA-PRO-WH	Electronic Low-Voltage, 250W LED/CFL	Compatible	Min: 1 / Max: 100	17
Lutron	Caseta PD-5NE-WH-C	Electronic Low-Voltage, LED—up to 250W	Compatible	Min: 3 / Max: 100	17

* Minimal buzzing noise may occur with some dimmers