

DALS LIGHTING

NOTES:

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com


MODEL NAME

5004-DW


EXCEL

4" Round Panel Light With Dim-To-Warm Technology

Our new LED Panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.






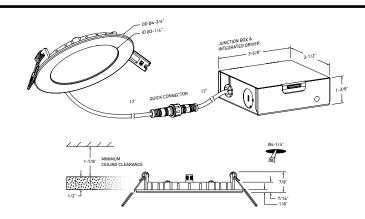

QUICK SPECS							
SIZE	WATTS	DELIVERED LUMENS*	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	11W	850lm	3000K- 2200K	80	120V	110°	White

^{*}Lumen output measured at 3000K



CONSTRUCTION	Lens	Type of optics	Type of LED
	Frosted	Flat lens	Edge-lit SMD
	Lens material	Housing material	Cut hole size
	Acrylic	Cast aluminum	4-1/4"
RATINGS	Placement	Lifespan	FT rating
	Indoor/Outdoor	35,000 hrs.	FT4

WHAT'S IN THE BOX

LED recessed fixture Junction box Push-in wire connectors Mounting hardware Instruction sheet

COMPATIBLE

ACCESSORIES

Universal Drilling Plate For 2", 3", 4" and 6" fixtures

RFP-46

RFP-UNI

Drilling plate for 4" and 6" fixtures

COMPATIBLE ADAPTERS

REC-EXT108

108" extension cord for recessed fixtures

REC-EXT230

230" extension cord for recessed fixtures



Canada

80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com



ELECTRICAL DETAILS

Input voltage 108-132V

Output current 250mA

Power factor

Driver type Constant current

Output voltage

30-46V

LED model # 2835

THD harmonic distortion <30%

Binning type 3 SDCM

FEATURES

Every fixture includes a junction box with an integrated driver

Superior LED performance and lifespan

Minimal heat emission

Very low profile

Can be daisy chained

Smooth 360° wide spread

Frosted lens

Dim-to-warm

Edge lit technology

technology, dims from 3000 K to 2200 K to mimic incandescent light

WARRANTY

RECOMMENDED DIMMER LIST*

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

BRAND	MODEL#	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 8 / Max: 88	27
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 2 / Max: 100	22
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 3 / Max: 100	22
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 100	10

^{*} Minimal buzzing noise may occur with some dimmers