

# **DALS** LIGHTING

NOTES:

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com


MODEL NAME


# IND4-DW-WH INDIRECT

# 4-Inch Indirect Recessed Light

Create the perfect mood when dimming your lights. This is now possible with our Dim to Warm concept, generating a warm, exquisite glow to set the tone for your evening.






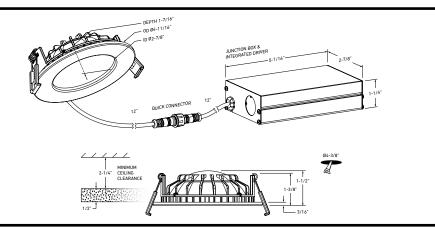

#### QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	9W	500lm	3000 K - 2200 K	80	120V	110°	White

<sup>\*</sup>Lumen output measured at 3000K



CONSTRUCTION	Lens	<b>Type of optics</b>	<b>Type of LED</b>
	-	Reflector	Edge-lit SMD
	<b>Lens material</b>	<b>Housing material</b>	Cut hole size
	Acrylic	Cast aluminum	4-3/8"
RATINGS	<b>Placement</b>	<b>Lifespan</b>	FT rating
	Indoor	50,000 hrs.	FT4

#### WHAT'S IN THE BOX

LED recessed fixture Junction box Push-in wire connectors Mounting hardware Instruction sheet

#### **ACCESSORIES**

#### **RFP-UNI**

Universal Drilling Plate

#### RFP-46

**Drilling Plate** 

## **ADAPTERS**

#### **REC-EXT108**

108" extension cord for recessed fixtures

#### REC-EXT230

230" extension cord for recessed fixtures



Canada

80, de la Seigneurie blvd., E. Blainville, Quebec J7C 4N1

U.S.A.

4383, NW 124th Ave., Coral Springs, Florida 33065

877.430.1818 info@dals.com dals.com

**ELECTRICAL DETAILS** 

Input voltage 100-135V

**Output current** 280mA

**Power factor** 

**Driver type** Constant current

**Output voltage** 

27V

LED model # 2835

**THD** harmonic distortion <30%

Dim-to-warm

**Binning type** 3 SDCM

**FEATURES** 

Every fixture includes a junction box with an integrated driver

Superior LED performance and lifespan

technology, dims from 3000 K to 2200 K to mimic incandescent light

Dome reflector

Can be daisy chained

Smooth 360° wide spread

## WARRANTY

COMMENDED DIMMED I IST\*

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*								
BRAND	MODEL#	DIMMER SPECS	GRADE	DIMMING RANGE (%)	MAX LOAD			
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	Min: 9 / Max: 100	33			
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	Min: 3 / Max: 99	27			
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	Min: 5 / Max: 100	27			
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	Min: 0 / Max: 100	13			

<sup>\*</sup> Minimal buzzing noise may occur with some dimmers