



## DALS LIGHTING

Canada  
80, de la Seigneurie blvd., E.  
Blainville, Quebec J7C 4N1

U.S.A.  
4383, NW 124th Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
dals.com

**MODEL** DRR4-CC-V

**NAME** Notch

4" 5CCT 1" deep regressed panel 0-10V dimmable

The Notch series of regressed downlights is characterized by a deep-set LED position which greatly reduces glare, neatly packaged in a price-conscious solution to general lighting.


**PROJECT**

**TYPE**


**DATE**

**QTY**

### NOTES

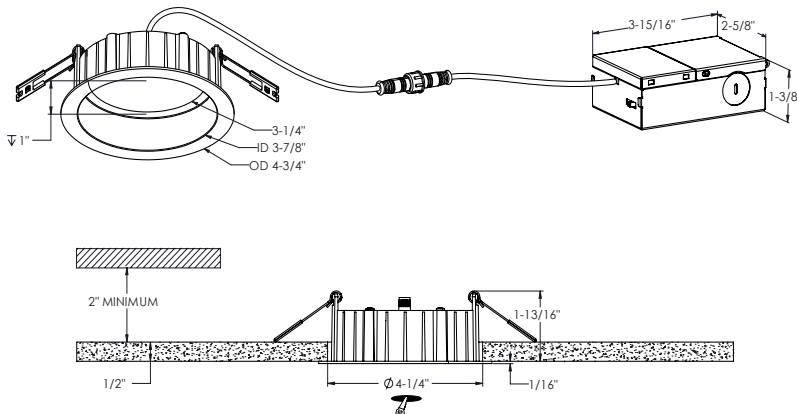

### LIGHT DISTRIBUTION

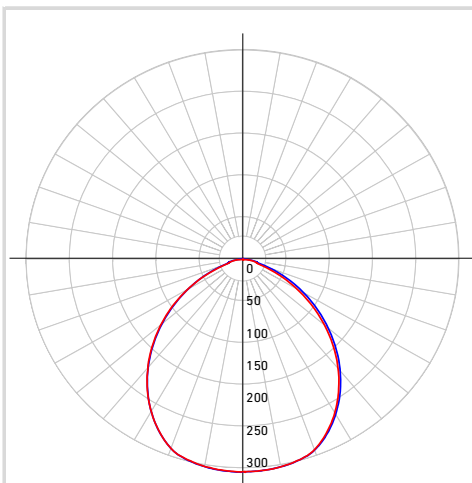

\*Lumen output measured at 3000k

### QUICK SPECS

|                           |                               |
|---------------------------|-------------------------------|
| <b>Size</b>               | 4"                            |
| <b>Watts (W)</b>          | 11                            |
| <b>Delivered lumens*</b>  | 800                           |
| <b>CRI</b>                | 90                            |
| <b>Voltage (v)</b>        | 120/277/347                   |
| <b>Beam angle (deg)</b>   | 100                           |
| <b>Cut hole size (in)</b> | 4-1/4"                        |
| <b>Lifespan (hrs)</b>     | 50 000                        |
| <b>FT rating</b>          | FT6                           |
| <b>Binning</b>            | 3 SDCM                        |
| <b>LED model</b>          | SMD 2835                      |
| <b>Color temperature</b>  | 2700K/3000K/3500K/4000K/5000K |

### ELECTRICAL DETAILS

|                              |                      |
|------------------------------|----------------------|
| <b>Environment</b>           | Indoor/Outdoor       |
| <b>Location</b>              | Wet                  |
| <b>Operating temp. (° C)</b> | -20 to 40            |
| <b>IP rating</b>             | IP44                 |
| <b>Input voltage (V)</b>     | 120-347              |
| <b>Output voltage (V)</b>    | 34.6                 |
| <b>Output current (mA)</b>   | 251                  |
| <b>Power factor (%)</b>      | 98                   |
| <b>Driver type</b>           | Constant current     |
| <b>THD</b>                   | 14.9%                |
| <b>Certifications</b>        | ETL, FCC, ICES, ES   |
|                              | IC, ASTM E283-04,T24 |

### ORDERING GUIDE

DRR4-CC-V

-

Voltage

-

Finish

**BLANK** - 120v  
Triac dimming

**WH** - White



**BK** - Black



**V** - 120-277-347V  
0-10v dimming

### CONSTRUCTION

|                         |                |
|-------------------------|----------------|
| <b>Lens material</b>    | Frosted        |
| <b>Optic type</b>       | Acrylic        |
| <b>Finish type</b>      | Plastic        |
| <b>Housing material</b> | Cast aluminium |

| WHAT'S IN THE BOX          | ACCESSORIES                | ADAPTORS                                  |
|----------------------------|----------------------------|-------------------------------------------|
| LED recessed fixture       | <a href="#">REC-RFP-4</a>  | <a href="#">REC-CC-EXT8FT</a>             |
| Junction box               | Rough-in plate             | 96" extension cord for recessed fixtures  |
| 3x Push-in wire connectors | <a href="#">REC-RFPE-4</a> | <a href="#">REC-CC-EXT20FT</a>            |
| Mounting hardware          | Rough-in plate             | 240" extension cord for recessed fixtures |
| Instruction sheet          | <a href="#">RFP-UNI</a>    |                                           |
|                            | Universal drilling plate   |                                           |
|                            | <a href="#">REC_EMD15</a>  |                                           |
|                            | Emergency driver           |                                           |

## RECOMMENDED DIMMER LIST\*

| BRAND     | MODEL                  | DIMMER SPECS                       | GRADE      | MIN | MAX | MAX LOAD |
|-----------|------------------------|------------------------------------|------------|-----|-----|----------|
| Dals      | SM-DIMSW Smart Dimmer* | Triac, 250W LED/CFL                | Compatible | 10  | 99  | 23       |
| Lutron    | DVCL-153PR-WH-C*       | Triac, 150 W Dimmable CFL/LED      | Compatible | 8   | 99  | 14       |
| Lutron    | CTCL-153PDH-WH-C*      | Triac, 150 W Dimmable CFL/LED      | Compatible | 8   | 99  | 14       |
| Lutron    | STCL-153PH-WH-C*       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0   | 98  | 14       |
| Lutron    | MACL-153MRHW-WHC*      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0   | 99  | 14       |
| Lutron    | DVELV-300P-WH          | 300W electronic low voltage dimmer | Compatible | 9   | 95  | 27       |
| Lutron    | MA-PRO-WH*             | ELV, 250W LED/CFL                  | Compatible | 1   | 99  | 23       |
| Lutron    | Caseta PD-6WCL-WH-R-C* | Triac, 300W Dimmable CFL/LED       | Compatible | 2   | 98  | 14       |
| Lutron    | Caseta PD-5NE-WH-C*    | ELV, LED—up to 250 W               | Compatible | 6   | 99  | 23       |
| Lutron    | Caseta PD-10NXD-WH*    | Triac, LED—up to 250 W             | Compatible | 0   | 101 | 23       |
| Leviton   | DSM10-1LZ*             | Triac, 450W Dimmable CFL/LED       | Compatible | 3   | 99  | 41       |
| Leviton   | 6674*                  | Triac, 150 W Dimmable CFL/LED      | Compatible | 12  | 99  | 14       |
| Leviton   | PL06-10Z*              | Triac, 150 W Dimmable CFL/LED      | Compatible | 10  | 99  | 13.6     |
| Leviton   | DSL06-1LZ*             | Triac, 150 W Dimmable CFL/LED      | Compatible | 9   | 99  | 14       |
| Leviton   | D26HD-742-1RW*         | Triac, 300W LED/CFL                | Compatible | 12  | 99  | 27       |
| Legrand   | RHCL453PNICCV4*        | Triac, 450W Dimmable CFL/LED       | Compatible | 9   | 98  | 41       |
| Legrand   | ADTP703TUM4*           | Triac, 450W Dimmable CFL/LED       | Compatible | 4   | 98  | 41       |
| Legrand   | RHL373PW*              | Triac, 250W LED                    | Compatible | 3   | 98  | 23       |
| Control 4 | C4-APD120-WH           | ELV, 120W LED                      | Compatible | 0   | 100 | 11       |
| Control 4 | C4-FPD120-WH           | Triac, 200W LED                    | Compatible | 0   | 100 | 18       |
| TP-Link   | HS220*                 | Triac, 150 W, Dimmable LED (MLV)   | Compatible | 5   | 100 | 14       |

\*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

## WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).