

# Revolve duo

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.

UPGRADE



WET

30°


SWIVEL/DIRECTIONAL



IC RATED




AIR TIGHT



COLOR TEMPERATURE



JA8 CERTIFIED

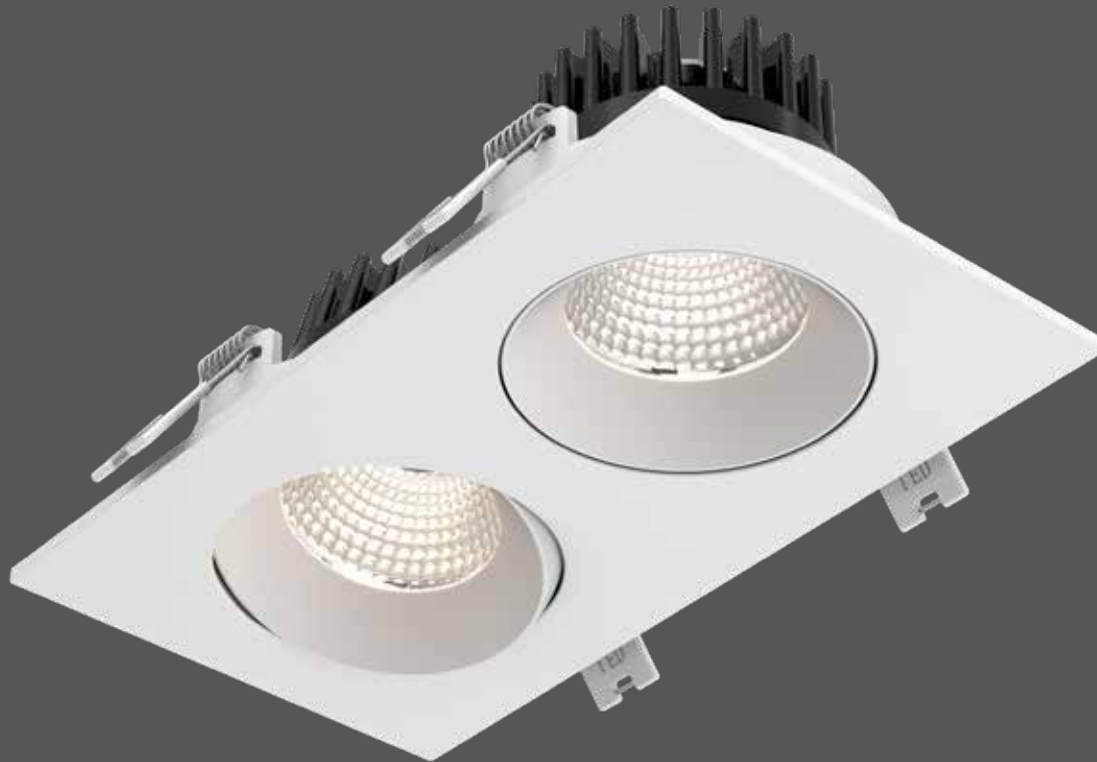

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
<b>GBR35-CC-DUO</b>	2x 3.5"	24 W	1740 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming

### Specifications

Includes a junction box with integrated dimmable driver

Can be daisy chained

Superior LED performance and lifespan

30° tilting, 360° rotation

Minimal heat emission

Aluminum construction

Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K

Low profile

40° beam spread

IC certification (suitable for direct contact with insulation)

Air-tight certified as per ASTM E283-04

Suitable for wet locations

Refer to website for dimmer compatibility

Ideal operating temperature:

-20° to 40° C

5-year warranty

### Finish

● **BK** Black

○ **WH** White

### Accessories

**RFP-DUO**

Rough-in plate

**REC-CC-EXT8FT**

8-foot extension cable

**REC-CC-EXT20FT**

20-foot extension cable

### Multi-voltage ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

**GBR35-CC-DUO** 7-1/8" x 3-1/2" 

