

# Boulevard pendant


The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.



DRY



T24  
JA8  
CERTIFIED

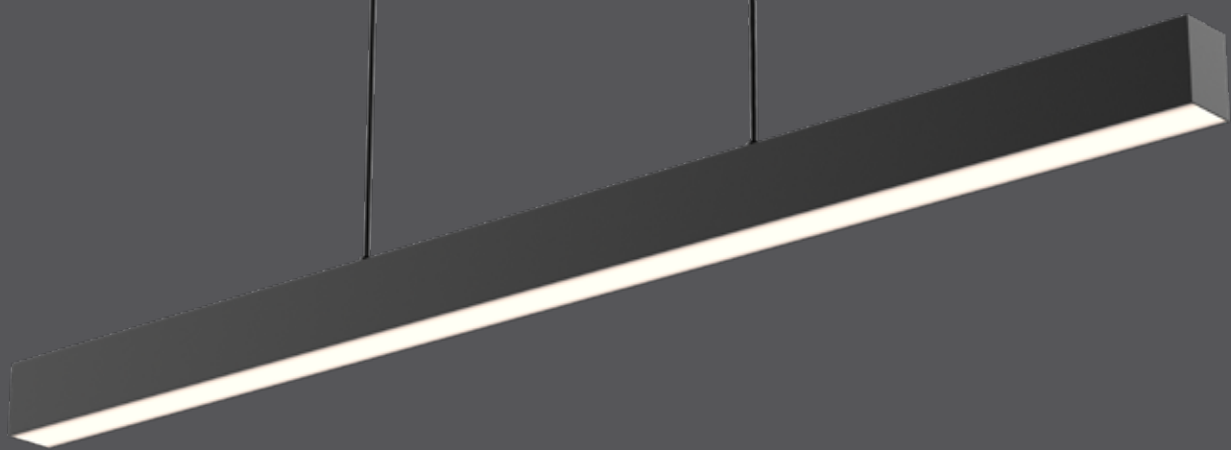

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
<b>LNPD48-CC</b>	48"	40 W	2805 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming

### Specifications

Switch-selectable CCT: 2700 K / 3000 K / 3500 K / 4000 K / 5000 K

Unique 20% up / 80% down light output  
120VAC / 60Hz input

Over 50,000 hours of service life

Adjustable height up to 10 feet

Aluminum housing which serves as a highly efficient heat sink

Multiple fixtures can be connected together

Integrated dimmable driver

Canopy mount on 4" octagonal junction box

Dimming ranges from 10% to 100%.

Refer to website for dimmer compatibility

5-year warranty

### Finish

● **BK** Black

○ **WH** White

### Accessories

#### **LNACC-L16FT**

16-foot lens for Boulevard series pendants and recessed linears

### Multi-voltage ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALSi representative for additional information and to confirm availability.

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALSi representative for more information.

### LNPD48-CC

