

Boulevard

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

UPGRADE



DRY



AIR TIGHT



ENERGY STAR




ETL Intertek




IC RATED



JA8 CERTIFIED



COLOR TEMPERATURE

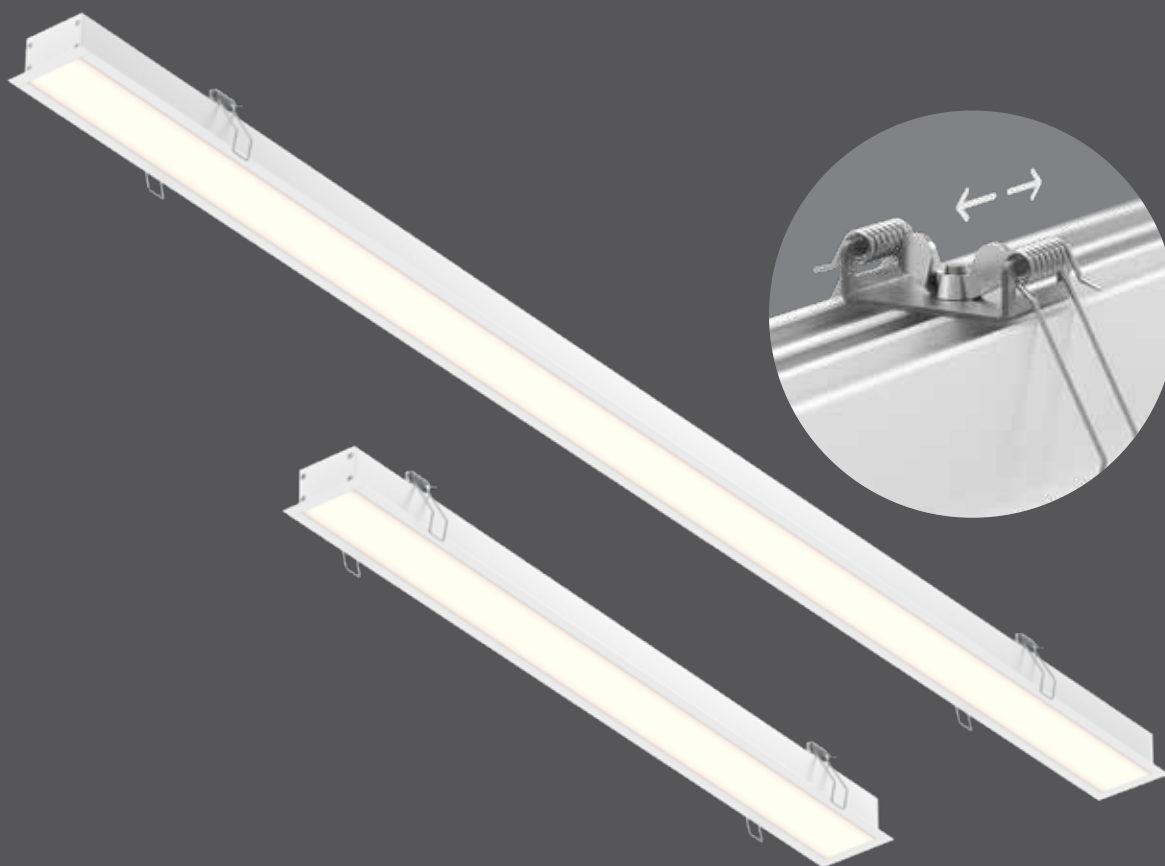

| Model | Size | Watts | Delivered lumens | CRI | Color °T | Standard voltage | Multi-voltage ⚡ |
|-----------------|------|-------|------------------|-----|--------------------------------|---------------------|-------------------------------------|
| LNR24-CC | 24" | 20 W | 1725 lm | 90 | 2700, 3000, 3500, 4000, 5000 K | 120V, Triac dimming | MV: 120 / 277 / 347V, 0-10V dimming |
| LNR48-CC | 48" | 40 W | 3760 lm | | | | |

Specifications

Every fixture includes a junction box with integrated dimmable driver
 Can be daisy chained
 Superior LED performance and lifespan
 Minimal heat emission
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K
 108° beam spread
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for dry locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

LNACC-L16FT
 16-foot lens for Boulevard series pendants and recessed linears

RFP-LNR24
 Rough-in plate

RFP-LNR48
 Rough-in plate

REC-CC-EXT8FT
 8-foot extension cable

REC-CC-EXT20FT
 20-foot extension cable

Multi-voltage ⚡


This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



LNR24-CC 23-3/8" x 2-1/8"

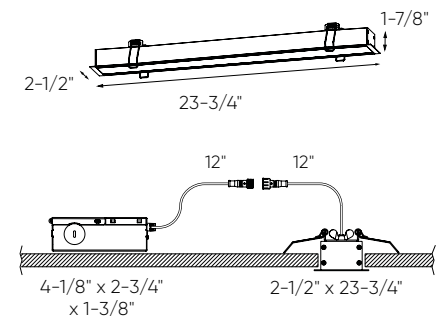

LNR48-CC 47-7/16" x 2-1/8"

