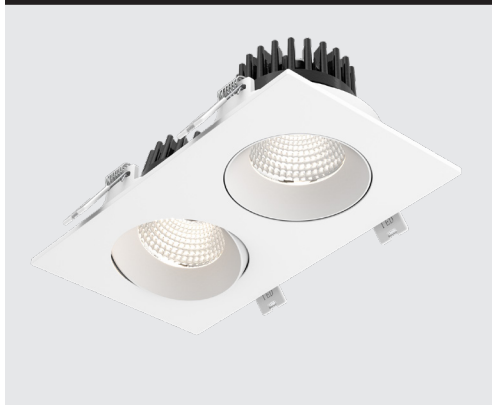
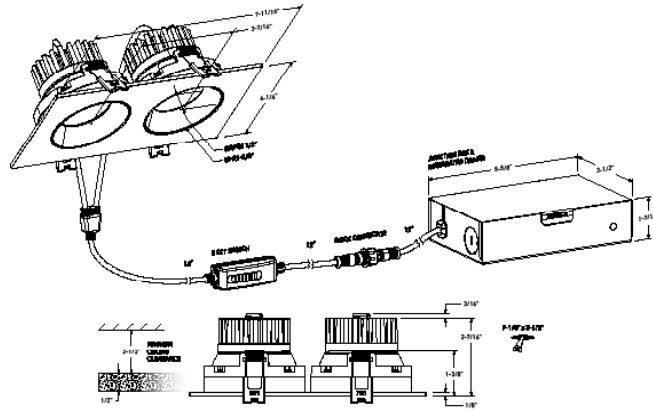



**MODEL
NAME** **GBR35-CC-DUO
REVOLVE DUO**
**Double 3.5" Regressed Gimbal
Downlight**

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.


PROJECT:
DATE:
NOTES:
TYPE:
QTY:

QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
3.5"	24W	1740lm	2700K 3000K 3500K 4000K 5000K	90	120V	40°	<input type="radio"/> White <input checked="" type="radio"/> Black

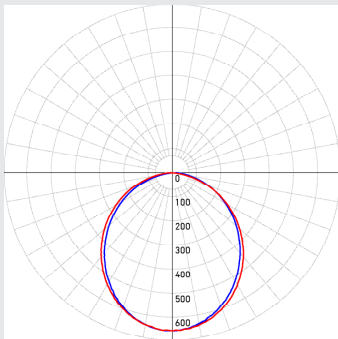*Lumen output measured at 3000K

LIGHT DISTRIBUTION

CONSTRUCTION
Lens
Clear

Lens material
Plastic

Type of optics
Optical lens

Housing material
Aluminum

Type of LED
COB

Cut hole size
7-1/8" x 3-1/2"

RATINGS
Placement
Indoor/Outdoor

Location
Wet

Lifespan
50,000 hrs.

Certifications
ETL, FCC, ICES, ES
IC, ASTM E283-04, T24

FT rating
FT6

Operating temperature
-20° to 50° C

WHAT'S IN THE BOX

LED recessed fixture
Junction box
Push-in wire connectors
Mounting hardware
Instruction sheet

ACCESSORIES

RFP-DUO
Rough-in plate

ADAPTERS

REC-EXT108
108" extension cord for recessed fixtures

REC-EXT230
230" extension cord for recessed fixtures



ELECTRICAL DETAILS	Input voltage 108-135V	Output current 545mA	Power factor 90%	Driver type Constant current
	Output voltage 35.4V	LED model # COB	THD harmonic distortion <30%	Binning type 3

FEATURES	Integrated dimmable driver	30° tilting, 360° rotation	Can be daisy chained
	Superior LED performance and lifespan	40° beam spread Minimal heat emission	Switch-selectable CCT: 2700K / 3000 K / 3500 K / 4000 K / 5000 K

WARRANTY	DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALSA customer service call 1-877-430-1818 or send an e-mail to info@dals.com .
----------	---

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	0	100	10
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	7	99	6
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	1	99	6
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	0	99	6
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	99	6
Lutron	MACL-153MRHW-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	0	99	6
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0	88	13
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	0	99	10
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 150W Dimmable CFL/LED	Compatible	0	96	6
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	0	100	10
Lutron	Caseta	Triac, LED—up to 250 W	Compatible	0	100	10
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	3	100	6
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	3	100	19
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	2	99	6
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	6	98	6
Leviton	DSL06-752	Triac, 150 W Dimmable CFL/LED	Compatible	6	98	6
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0	100	13
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	5	99	19
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	1	88	19
Legrand	ADPD453LM2	Triac, 450W Dimmable CFL/LED	Compatible	29	99	19
Legrand	RHL373PW	Triac, 250W LED	Compatible	2	99	10
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	5

* Minimal buzzing noise may occur with some dimmers