



MODEL NAME **LNR24-CC BOULEVARD**

24" Architectural Recessed Light

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.

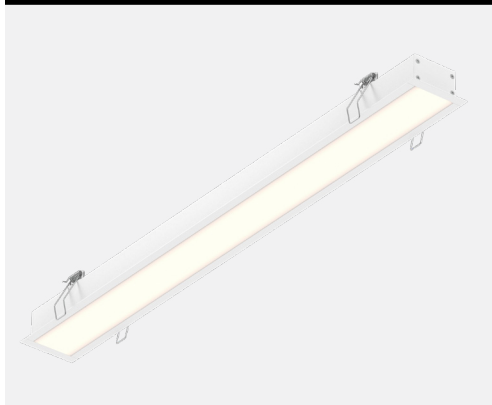

| | |
|-----------------|--------------|
| PROJECT: | TYPE: |
| DATE: | QTY: |
| NOTES: | |

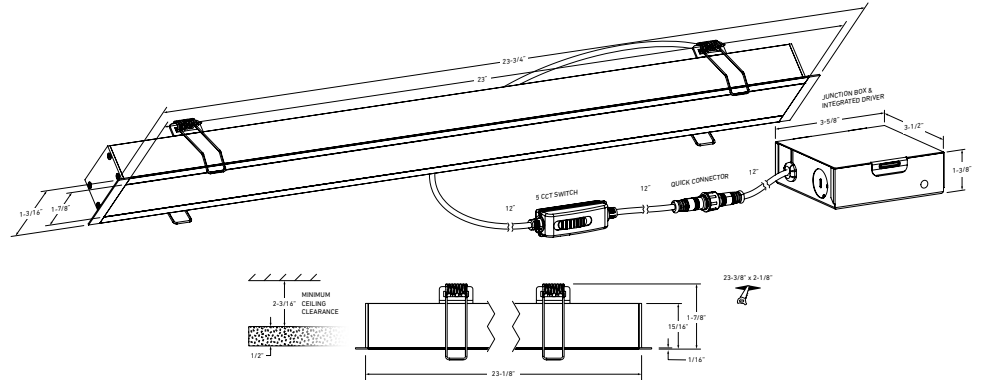


QUICK SPECS

| SIZE | WATTS | DELIVERED LUMENS* | COLOR °T 5CCT | CRI | VOLTAGE | BEAM ANGLE | FINISH |
|------|-------|-------------------|---|-----|---------|------------|---|
| 24" | 20W | 1725lm | 2700K 3000K 3500K 4000K 5000K | 90 | 120V | 108° | <input type="radio"/> White <input checked="" type="radio"/> Black |

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION

| | | |
|----------------------------|---|--|
| Lens Frosted | Type of optics Flat lens | Type of LED SMD |
| Lens material PC | Housing material Aluminum extrusion | Cut hole size 23-3/8" x 2-1/8" |

RATINGS

| | | |
|----------------------------|--|---|
| Placement Indoor | Lifespan 50,000 hrs. | FT rating FT6 |
| Location Dry | Certifications ETL, FCC, ICES, ES, IC, ASTM E283-04, T20 T24 | Operating temperature -20° to 40° C |

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

- [RFP-LNR24](#)
Drilling Plate
- [LNACC-L16FT](#)
16-foot lens for Boulevard series pendants and recessed linears

ADAPTERS

- [REC-EXT108](#)
108" extension cord for recessed fixtures
- [REC-EXT230](#)
230" extension cord for recessed fixtures



**ELECTRICAL
DETAILS**

Input voltage
108-132V

Output current
470mA

Power factor
90%

Driver type
Constant current

Output voltage
40-44V

LED model #
2835

**THD harmonic
distortion**
<30%

Binning type
3 SDCM

FEATURES

Every fixture includes
a junction box with an
integrated driver

Superior LED
performance and
lifespan

Frosted lens
Back-lit technology

Switch-selectable CCT:
2700K/ 3000 K/ 3500 K/
4000 K/ 5000 K

Can be daisy chained

Minimal heat emission

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

| BRAND | MODEL # | DIMMER SPECS | GRADE | DIMMING RANGE (%) | | MAX LOAD |
|-----------|--------------------|------------------------------------|------------|-------------------|-----|----------|
| | | | | MIN | MAX | |
| Lutron | DVELV-300P-WH | 300W electronic low voltage dimmer | Compatible | 5 | 100 | 15 |
| Lutron | Caseta PD-5NE-WH-C | ELV, LED—up to 250 W | Compatible | 1 | 100 | 13 |
| Control 4 | C4-APD120-WH | ELV, 120W LED | Compatible | 1 | 100 | 6 |

* Minimal buzzing noise may occur with some dimmers