

Contour

The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.


NEW

2200k 2700k 3000k 3500k 4000k

COLOR TEMPERATURE

WET

ETL Intertek

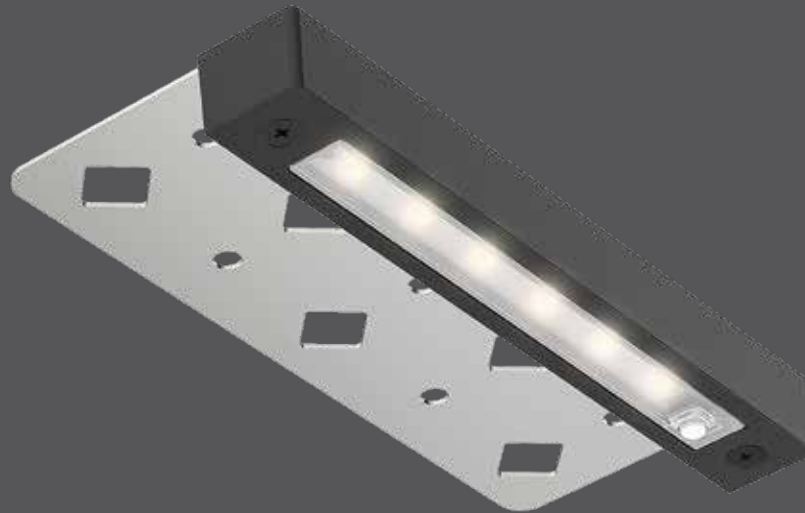

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LHS07-CC	7"	3 W	200 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC

Specifications

Over 50,000 hours of service life
 12VAC input
 110° beam angle
 Frosted lens
 Can be mounted to wood or concrete
 Aluminum construction
 Surface or recessed installation
 Switch-selectable CCT: 2200 K/2700 K/
 3000 K/3500 K/4000 K
 Suitable for wet locations
 5-year warranty

Note

Low-voltage transformer required.
 Sold separately.

Other color temperatures and finishes options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALs representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK
 60W, 120VAC 60Hz input
 12VAC output low-voltage transformer

LTR-300-BK
 300W, 120VAC 60Hz input
 12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16
 50 feet of 16 gauge low-voltage wiring

LCBL-100-16
 100 feet of 16 gauge low-voltage wiring

LCBL-50-14
 50 feet of 14 gauge low-voltage wiring

LCBL-100-14
 100 feet of 14 gauge low-voltage wiring

LCBL-100-12
 100 feet of 12 gauge low-voltage wiring

LCBL-200-12
 200 feet of 12 gauge low-voltage wiring

LHS07-CC

