

NEW

VERSA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.



W
MULTI-WATTAGE

WET

LOW-GLARE

CUSTOMIZE

IC
RATED

T24
JA8
CERTIFIED


ETL
Intertek

ENERGY STAR

RC04-CC



DRIVER
Converts mains voltage (120V/277V/347V) to the appropriate current for the LEDs, featuring multiple dimming capabilities, including Triac and 0-10V dimming, for added flexibility..

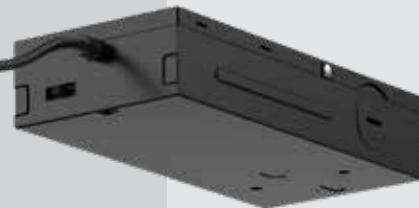

LIGHT ENGINE
Includes an LED module, a heatsink for efficient cooling, a lens holder for light distribution, and a rotating dial at the top to select the color temperature.



LENS
Sits below the light engine and shapes the light to create the desired beam angle. Available in 20°, 35°, and 60° angles.


REFLECTOR
Sits inside the trim, with options for sloped or regular ceiling positioning. Available in four finishes: Alzak, black, gold, and white.




TRIM
The visible part framing the light opening. Flanged trim has a visible edge (available in black, gold, and white), while trimless blends seamlessly with the ceiling.




RC03-CC

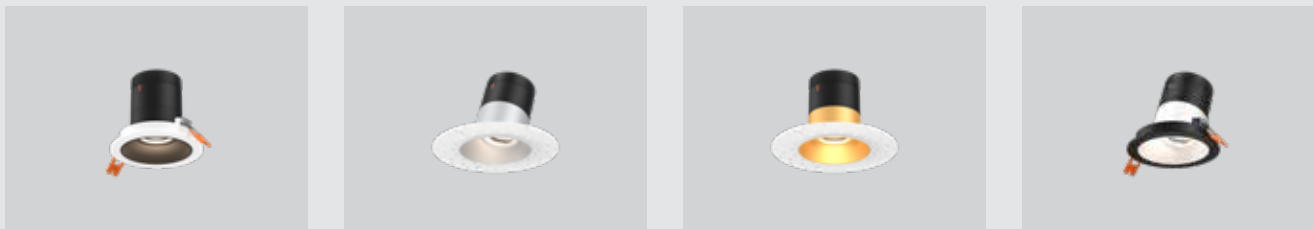

RC04-CC

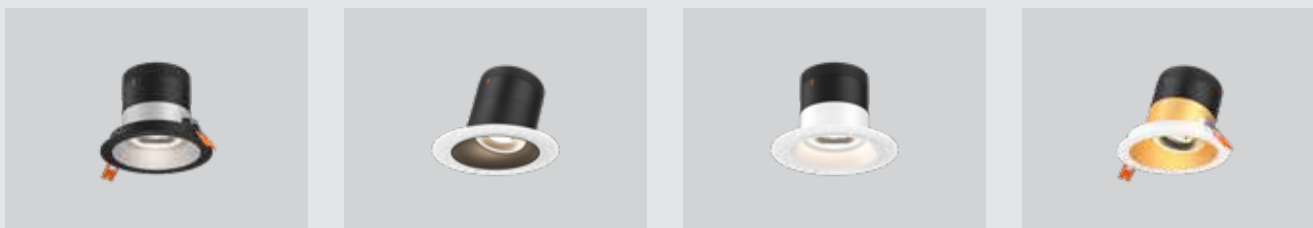

RC06-CC

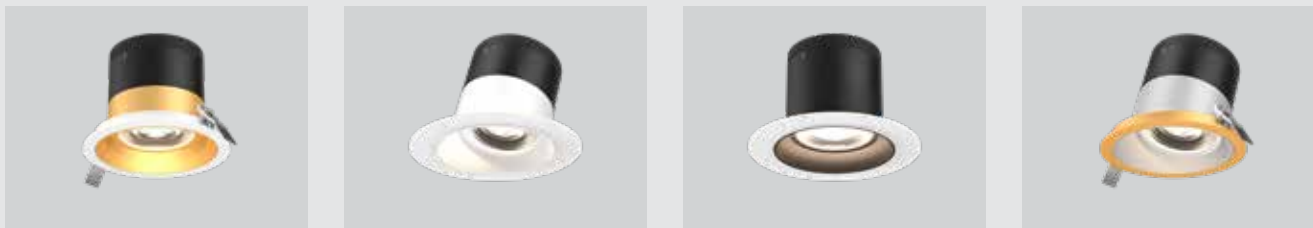


ORDERING GUIDE

Prefix	Light module	Beam angle	Reflector type	Reflector finish	Trim style
RC	03-CC 3" module/1000lm	20 20° narrow beam	RG Regular ceiling	AZ Alzac	TL Round trimless
	04-CC 4" module/2000lm	35 35° medium beam	SL Sloped ceiling	BK Black	TBK Round black trim
	06-CC 6" module/3000lm	60 60° wide beam		GD Gold	TGD Round gold trim
				WH White	TWH Round white trim

RC 04-CC - 20 - RG BK - TBK

RC04-CC-20-RGBK-TBK



NEW

VERSA

A versatile recessed lighting solution available in three-, four-, and six-inch sizes, featuring customizable finishes, trims, lenses, and reflectors, with options for standard, sloped ceiling, and trimless installations, all with multi-voltage compatibility. Perfect for commercial or residential spaces.



COLOR TEMPERATURE



MULTI-WATTAGE



WET



LOW-GLARE



CUSTOMIZE

IC

RATED

T24

JAB


CERTIFIED














Intertek



ENERGY STAR

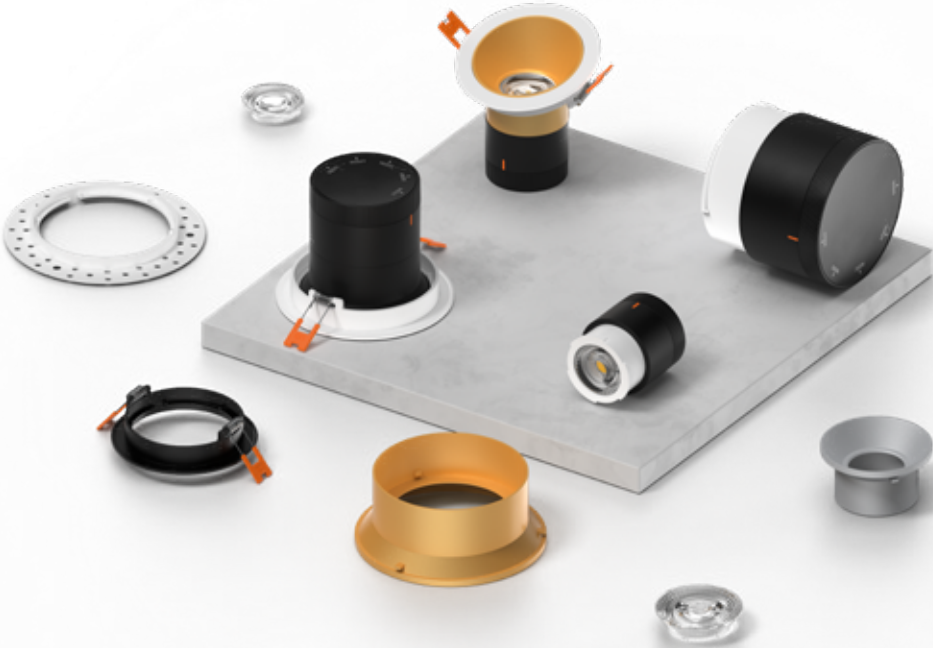

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage ⚡
RC03-CC	3"	8/10/12 W	1000 lm	90	2700, 3000, 3500, 4000, 5000 K	120 / 277 / 347V Triac and 0-10V dimming
RC04-CC	4"	16/20/24 W	2200 lm			
RC06-CC	6"	24/30/36 W	3000 lm			

RC03-CCØ3-1/2" **RC04-CC**Ø4-1/4" **RC06-CC**Ø6" **Specifications**

Every fixture includes a junction box with integrated dimmable driver
Multi-watt output allows you to choose from three wattage settings for customizable brightness directly on the jbox
Can be daisy chained
Aluminum construction
Rotary dial CCT switch
20°, 35°, or 60° beam angles
5-year warranty

Accessories

RFP-35
Rough-in plate for 3" model
RFP-46
Rough-in plate for 4" models
RFP-RC06
Rough-in plate for 6" models
REC-CC-EXT8FT
8-foot extension cable
REC-CC-EXT20FT
20-foot extension cable

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.