

New DALS headquarters 2023

dals 🚺




Our mission is to offer the highest level of service and quality through an innovative, functional and complete product line.

DALS Lighting is a manufacturer of designer lighting products focusing on smart, innovative and emerging technologies. Our lighting systems are displayed and stocked at several lighting showrooms and retailers, electrical distributors and e-commerce platforms. Our products are also sold on projects across North America through an extensive network of agents who work with architects, engineers, contractors and distributors. We strive for excellent service, superior lead times, environmental innovation and product quality.



dals

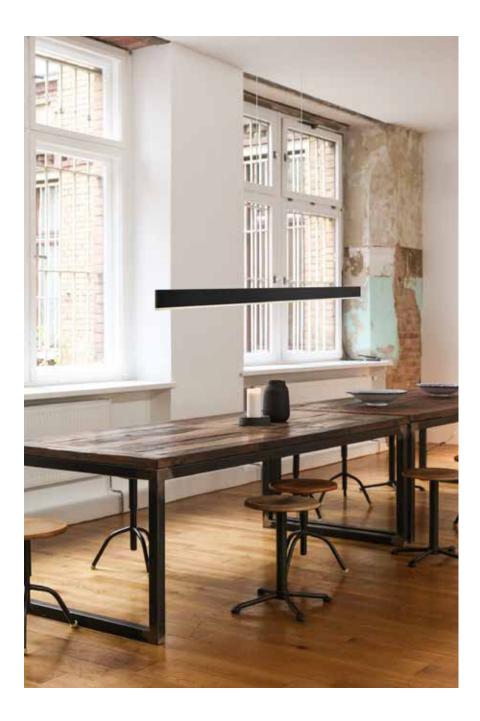

Our milestones

2008

DALS Lighting Inc. was founded and quickly grew to become a leader in accent lighting by launching an innovative LED product line.

2009 - 2014

DALS continues its steady growth by shifting all of its product lines to LED light sources while continuing to focus on best-in-class service.

2015

Following its rapid growth with LED products across North America, DALS launched its LED Design Guide, which focused exclusively on LED technology and included several new innovative items. DALS also opened its LED lighting showroom at the Dallas Market Center in Dallas, Texas.

2016

DALS moved into its new headquarters in Blainville, Quebec, Canada. DALS also expanded its U.S. operations in Coral Springs, Florida.

2017-2019

DALS launched its smart home ecosystem, which includes a range of connected products that are easy to use with the DALS mobile app. The launch of this category has generated a lot of excitement in the industry and we've dedicated a team to accelerate the continued development and optimization in this division.

2020-2022

In 2020, DALS opened its new atrium showroom at the Dallas Market Center and accelerated its product launch cadence. We launched the DALS Connect and DALS Connect PRO smart platforms as well as new product categories such as landscape lighting, which resulted in significant growth.

2023

Heading into 2023, DALS will be expanding into its new Canadian headquarters and warehouse to continue supporting its growth and maintaining a strong inventory position. DALS is also launching several new products with a continued focus on recessed, landscape lighting and the DALS Connect ecosystem.



New product

This symbol depicts a new prod-

uct launching this year. Look for

specifications regarding these

products in this catalog.

UPGRADE

Product upgrade

When you see this symbol, it marks that an existing product has gone through extensive enhancements.



Low-glare

The regressed positioning of the LED module in this series of downlights greatly eliminates glare.



Change colors

RGB+CCT color changing light – choose your favorite color to create different atmospheres, or use it for general illumination with a range from warm to cool white.



Air tight

Air tight fixtures help keep air conditioning or heating from leaking out of the home through holes in the ceiling. JA8 Certified

JA8/Title 24

This certification ensures that the lighting control system is designed, installed, and programmed correctly to satisfy the JA8/Title 24 Lighting building code of California.



CCT switch

These types of lights provide you with the ability to change the color temperature. Within one fixture, you have multiple color temperatures that range from warm white to cool white.



IC rated

"IC" stands for Insulation Contact. IC rating is essentially a measure used to determine if a recessed downlight is suitable to come into contact with your home's insulation or not.

Wi **Fi**

Smart home

This symbol indicates that the light fixture can be controlled from the DALS Connect app. You can remotely adjust the lighting in your home from anywhere, enjoy greater control over the lighting effects such as dimming and light color, and establish automated lighting schedules around your lifestyle.



Dry location

Dry-rated lights don't protect against condensation and should not come into contact with water. However, these fixtures do withstand brief exposure to moisture with proper ventilation.



Damp rated

Damp-rated lights are used in places that have some contact with moisture, but not in areas with constant or direct exposure to water. For example, you can use damp-location rated fixtures to illuminate the area directly outside your shower.



Wet rated

Wet-rated lighting fixtures are used in places with direct exposure to water. Fixtures rated for wet locations use waterproof seals to protect their internal components from moisture.

ADA

COMPLIANT

ADA compliant

The ADA sets regulations that assert limits and standards that contractors must meet and comply with when installing light fixtures in public buildings. To be considered ADA compliant, the fixture cannot extend more than 4 inches into the hallway, walkway or corridor to protect people with disabilities from bumping into them and harming themselves.

<table-of-contents> Bluetooth

Bluetooth compatible

This smart light, while Bluetooth compatible, can be seamlessly integrated into your DALS Connect ecosystem.



REVOLVE DUO / P. 38

RECESSED 18-75



32 PIVOT FGM3/4/6



44 PINPOINT SERIES MSL4/5/10/5G/10G





34 PIVOT DUO FGM4-CC-DUO



46 RGR RGR2/4/6-CC





36 SCOPE LEDDOWNG3/G4 GMB2/4



48 RGR SQUARE RGR2/4/6SQ-CC



28 REVOLVE GBR35-CC GBR06-CC

282

40

50

INDIRECT

IND4/6

APERTURE

MFD03-CC

REVOLVE PRO

DCP-GBR35



38

REVOLVE DUO GBR35-CC-DUO



306 RGR SMART SM-RGR4

58

MYSTIQUE

SPN4-CC

SPN6-CC

2006



60 MYSTIQUE SQUARE SPN4SQ-CC SPN6SQ-CC



ALTER SERIES RTF4-3K RTF4-CC



30 FACET RGM2/4/6-CC



42 PINPOINT SERIES MSL1/2



52 HILUX HPD4/6/8-CC HPD4/6/8-CC-V



62 EXCEL 5003-CC/5004-CC 5005-CC-5006-CC



ALTER SERIES LEDPNLRTF56-CC

Lighting Design Guide 2023 | dals.com 9



54 ETCH DDP4-CC DDP6-CC



64 EXCEL SQUARE 5004SQ-CC



72 ACCESSORIES



284 ETCH PRO DCP-DDP4 DCP-DDP6



286 EXCEL PRO DCP-PNL4 DCP-PNL6



56 NOTCH DRR4/6-CC DRR4/6-CC-V



308 EXCEL SMART SM-PNL4 SM-PNL6




66 ACCESS 2004



68



INSTALLATION GUIDE



COB-TAPE COBTP1M/ COBTP3M/ COBTP5M/ COBTP-REEL



LINU LINU12 LINU04



SWIVLED SWIVLED12

SWIVLEDHP

86

96

DUO-PUCK

4005FR

4005HP

K4005FR



POWERLED LINEAR 6009CC/ 6012CC/ 6024CC/ 6036CC/ 6048CC



90

PROLED LINEAR HLF09/ HLF12/ HLF18/ HLF24/ HLF30



SM-UCL12/ SM-UCL24/ SM-UCL36



92 COUNTERLED LINEAR 9009CC/ 9012CC/ 9018CC /9024CC/ 9030CC

94 SUPER-PUCK RECESSED 4001 4001HP





98 ULTRA-SLIM PUCK 4006



326 SMART PUCK SM-UP1/ SM-UPK3/

SM-UPK5

100 POWERLED PUCK 6001



102 MINI-PUCK LEDRDM1



ECO-PUCK LEDRDP18





SMART OUTDOOR TAPE SM-OTP24FT SM-OTPACC8FT



106 LED DIMMABLE DRIVERS



110



ACCESSORIES





104



SMART TAPE SM-TAP1M/ SM-TAP3M SM-TAP5M







HELIX

SPR20-CC

SPR34-CC



120 BOULEVARD PENDANT LNPD48-CC LNPD48-CC-V



122 PINPOINT LINEAR MSLPD48-CC



BEAM SPD48 SPD72

124

136

FPD-CC

ATOM PENDANT



126 OLYMPIA FIVE RRPD5-CC

140

ECLIPSE

PDR14-CC



128 OLYMPIA TWO





142 STELLAR PENDANT STRPD



144 STELLAR FLOOR STRFL

146 CASSIO PDR5

132

TWIST

TWPS



134

TWIRL

TWPD

148 LINEA PENDANT PDLED120-24/36 /48/60



150 LINEA CLUSTER PDLED120-5/5SQ/8/8SQ



NOVA PDC18-CC



296 ARCHITECT PENDANT SM-LPD39



154 GEO PDL44



156 BOREALIS VRB24-CC



158 ARIA VSW24-CC VSW36-CC



160 GEMINI SWS12/24/36



ARIES

STK21/37

164 NOBLE ONE SERIES LEDVAN001-CC-12



NOBLE ONE SERIES LEDVAN001-CC-18/24



168 NOBLE TWO SERIES LEDVAN002-CC-12



170 NOBLE TWO SERIES LEDVAN002-CC-24/36



172 LYRA LEDVAN003-CC-24/32



174 АТОМ

FDB-CC



176 NEWTON FMT18-CC





178 STELLAR FLUSH MOUNT STRFM

DELTA SQUARE

CFLEDSQ06/10/14-CC

180 MISTY FUZ11-CC

310

DELTA SMART

SM-FM08/14



182 AURORA CFH12



BLOOM CFR12

184



186 ORA CFG13-CC



188 DELTA CFLED06/10/14/18-CC



198

PROFILE LWJ08/16/24-CC



200 PINPOINT WALL MSLWALL-CC

202 ADEN LEDWALL-A



192 ESSENTIAL 7205/7209

204

BROOKLYN

LEDWALL-B







210 GENEVA LEDWALL-G-CC



212 HARLOW LEDWALL-H



ALTO SQS06/10/15



216 CUBIX LEDWALL001D



218 RONDO LEDWALL002D



220 MARQUEE LEDSTEP001D



222 ECHO LEDSTEP002D



224 PEARL LEDSTEP004D



226 CAMBER LEDSTEP005D



228 ARC LEDSTEP006D







EDINBURGH LEDWALL-E



194

GEMINI

SWS48-CC



206







Lighting Design Guide 2023 | dals.com 13

DURBAN LEDWALL-D



GUIDE

246

BEACON

LPL26-CC

CONNECTION



236 SMART CONNECTION GUIDE

248

COLUMN

LRB20-CC LRB30-CC



SPOT

250

STATURE

LSP3-CCL LSP4-CCL



EDGE LSQP-CC

252

LTRP-60

LTR-300



FLUX LPP20-CC



254 CORE DCP-TR60

DCP-TR200



256 ORBIT DCP-SPT6



258 GRAVITY DCP-GRD4



260 HORIZON DCP-FLD30



TRANSFORMERS

262 GAÏA DCP-CPL24



AXIS DCP-STK20 DCP-STK50



266 MASON DCP-BRK12



268 KAYU DCP-RK10 DCP-RK18



270 ORION DCP-STG48




272 ACCESSORIES



LEDPATH003D LEDPATH004D



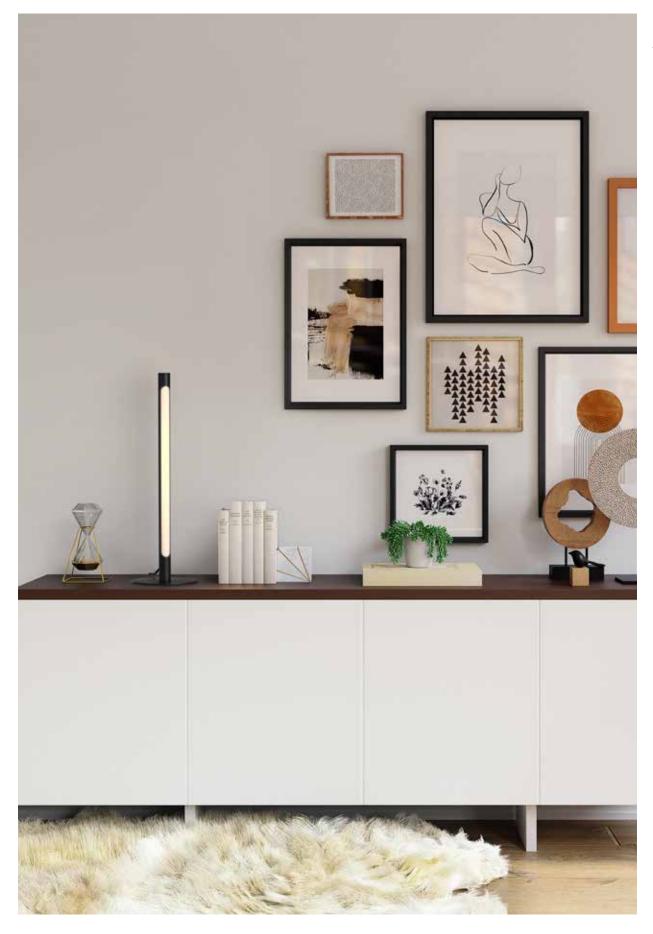



277 CONNECTION GUIDE



280 PRO HUB DCP-HUB



282 **REVOLVE PRO** DCP-GBR35



284 ETCH PRO DCP-DDP4 DCP-DDP6



286

EXCEL PRO DCP-PNL4 DCP-PNL6



290 BOULEVARD PENDANT PRO DCP-LNPD48



292 A21 PRO DCP-BLBA21

294 BR30 PRO





296

SM-LPD39

298 ARCHITECT PENDANT



ARCHITECT WALL SM-LWS19



BOULEVARD PRO

DCP-LNR24

DCP-LNR48

300 AXIS TABLE LAMP SM-STTL20



306



RGR SMART SM-RGR4WH



308 EXCEL SMART SM-PNL4 SM-PNL6



310 DELTA SMART SM-FM08/14



312 A19 SMART SM-BLBA19



314 BR30 SMART SM-BLBBR30



316 GU10 SMART SM-BLBGU10



318 PAR20 SMART SM-PAR20



320 SMART TAPE SM-TAP1M/ SM-TAP3M SM-TAP5M



SMART OUTDOOR TAPE SM-OTP24FT SM-OTPACC8FT



334 ACCESSORIES



SMART LINEAR SM-UCL12/ SM-UCL24/ SM-UCL36



326 SMART PUCK SM-UP1/ SM-UPK3/ SM-UPK5



328 SMART WALL CONTROLLER SM-WLCT



330 SMART PLUG SM-PLUG



SMART DIMMER SWITCH SM-DIMSW













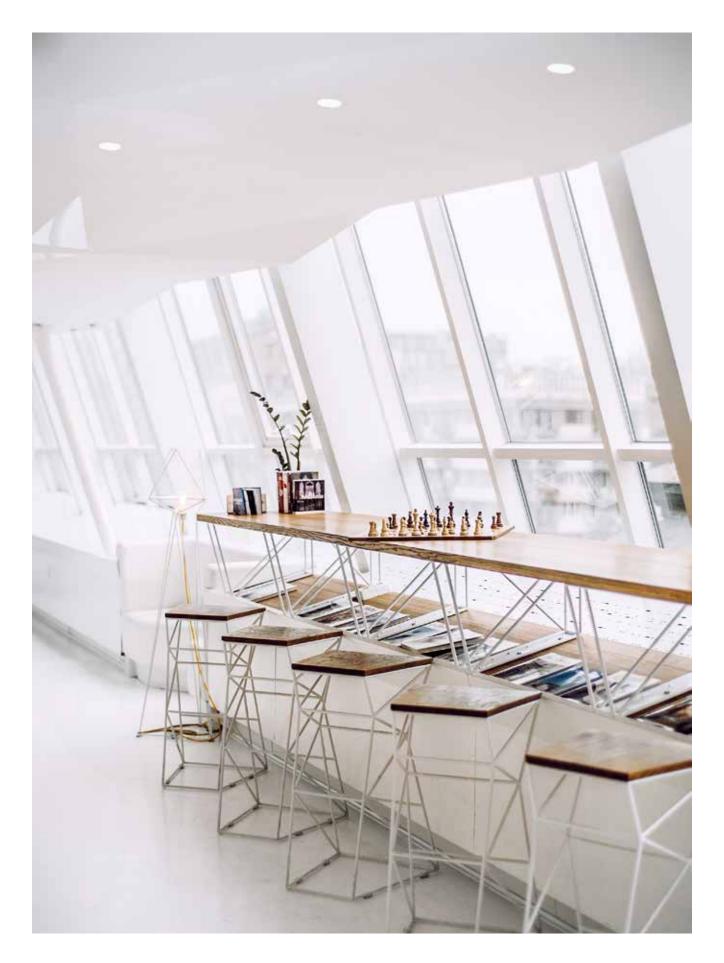

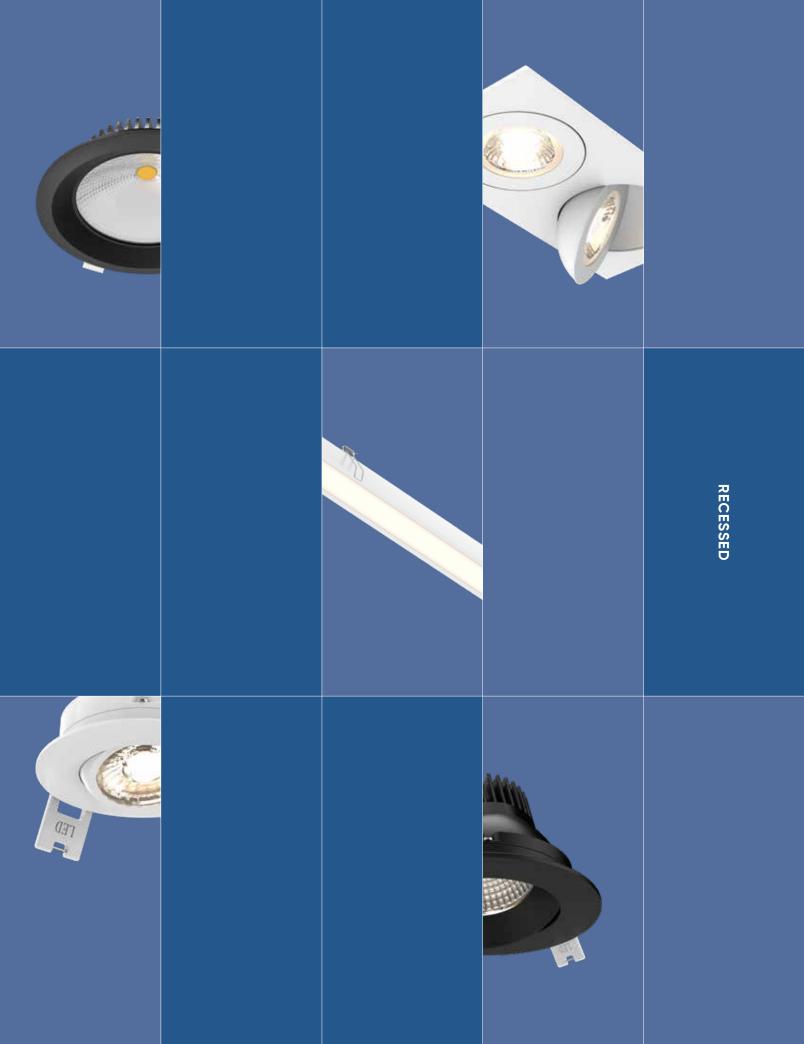

ΡΙνοτ

FGM3/4/6



22 INSTALLATION GUIDE

34

46

284

286

EXCEL PRO

DCP-PNL4

DCP-PNL6

ETCH PRO

DCP-DDP4

DCP-DDP6

PIVOT DUO

FGM4-CC-DUO



26 BOULEVARD LNR24/48-CC LNR24/48-CC-V



28 REVOLVE GBR35-CC GBR06-CC



282 **REVOLVE PRO** DCP-GBR35



42 PINPOINT SERIES

MSL1/2

52

30

FACET

RGM2/4/6-CC





LEDDOWNG3/G4

36

48

56

NOTCH

DRR4/6-CC

DRR4/6-CC-V

SCOPE

GMB2/4



40

APERTURE

MFD03-CC

50

INDIRECT



MYSTIQUE SQUARE SPN6SQ-CC

62 EXCEL 5003-CC/5004-CC 5005-CC-5006-CC



ALTER SERIES LEDPNLRTF56-CC

70



44 PINPOINT SERIES MSL4/5/10/5G/10G

54

64

EXCEL SQUARE

5004SQ-CC

ETCH

DDP4-CC

DDP6-CC

RGR RGR2/4/6-CC



58

66

ACCESS

2004

2006

MYSTIQUE

SPN4-CC

SPN6-CC

306

RGR SMART

SM-RGR4

38

REVOLVE DUO

GBR35-CC-DUO

60 SPN4SQ-CC



ALTER SERIES RTF4-3K RTF4-CC



Recessed | dals.com 20

72 ACCESSORIES




308 EXCEL SMART SM-PNL4 SM-PNL6










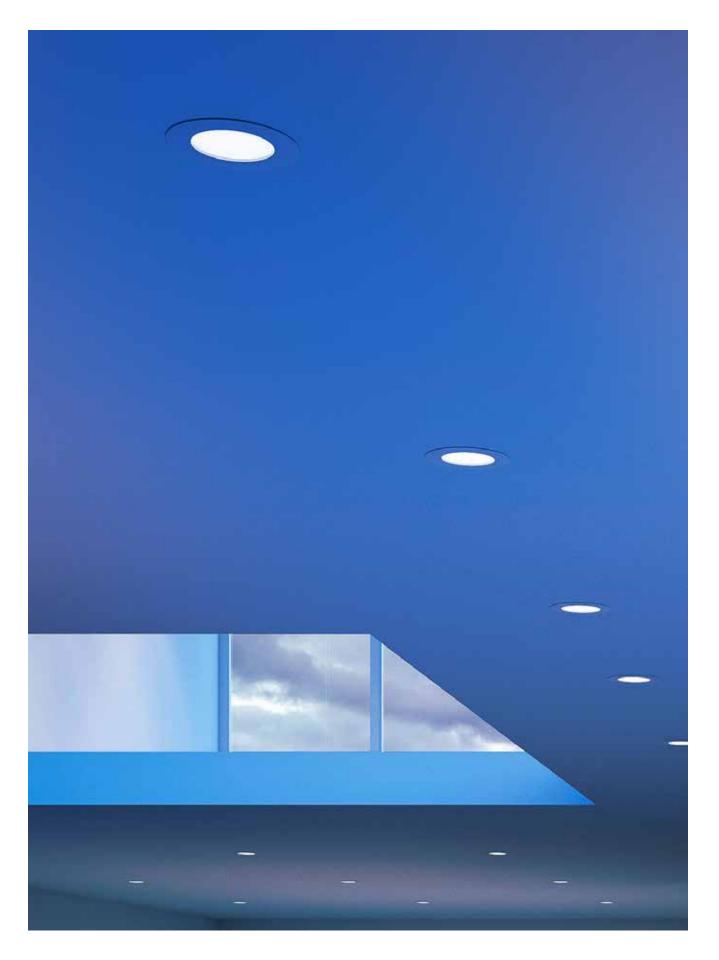


Proper Sizing, Spacing and Downlighting Techniques

The components Our recessed kits include two main components: the driver and the fixture.





В



С

The driver (A)

is what is recessed into the ceiling and consists of the electrical parts that bring power to the light.

The fixture (B & C)


is what's visible to people in the room and gives the light its aesthetic.



Fixtures and drivers are sized to correlate with one another and are sold together with all of our recessed lights. Panels. Spotlights. Downlights. Whatever you call recessed lights, they're some of the most versatile lighting options out there. The most common use of recessed lighting, and what we'll focus on here, is recessed downlighting from the ceiling.

Installation type

What fixture you choose starts with knowing whether it will be used in a new construction, a remodel or as a retrofit.

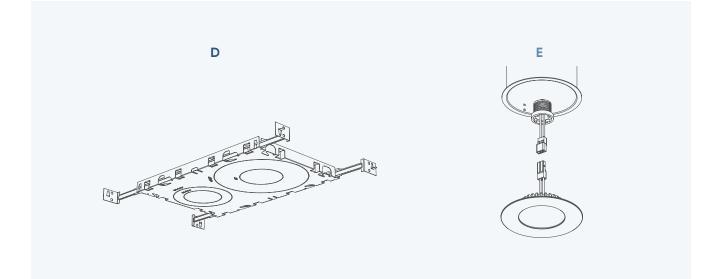

New construction

Locations with visible ceiling joists and without drywall. Lights can be used with our rough-in plates **(D)** to help in the installation process.

Remodels

When the joists are not exposed or if you want to upgrade your current system to LED.

Retrofit

When an existing bulb is removed from the original housing, and replaced with an LED trim **(E)**.




Most of Dals' recessed fixtures are designed for new construction and remodels. These fixtures are installed through a small opening in the ceiling and held in place with clips.



A rough-in plate is designed for new construction or renovations where the ceiling framing is exposed. It allows for proper placement of your recessed light and is made from sturdy galvanized steel.

How to Choose Recessed Lighting

How many downlights do I need?

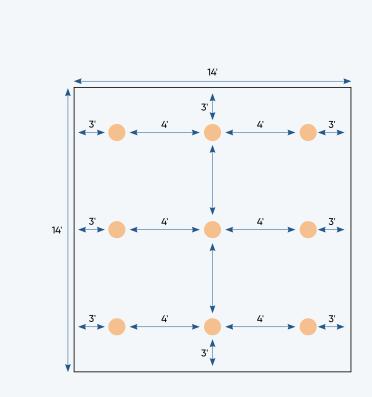

A simple method for estimating the number of downlights required is as follows:


Recessed downlights are generally positioned 2 to 3 feet away from walls with a space of 3 to 4 feet between each light.

Dividing the ceiling height by two is a way of gauging how much space to leave between each downlight.

Thus, if your ceiling is 8 foot high, place your lights 4 feet apart.



In Canada, 4" recessed lights are the most popular, in the U.S., 6" are most commonly used.

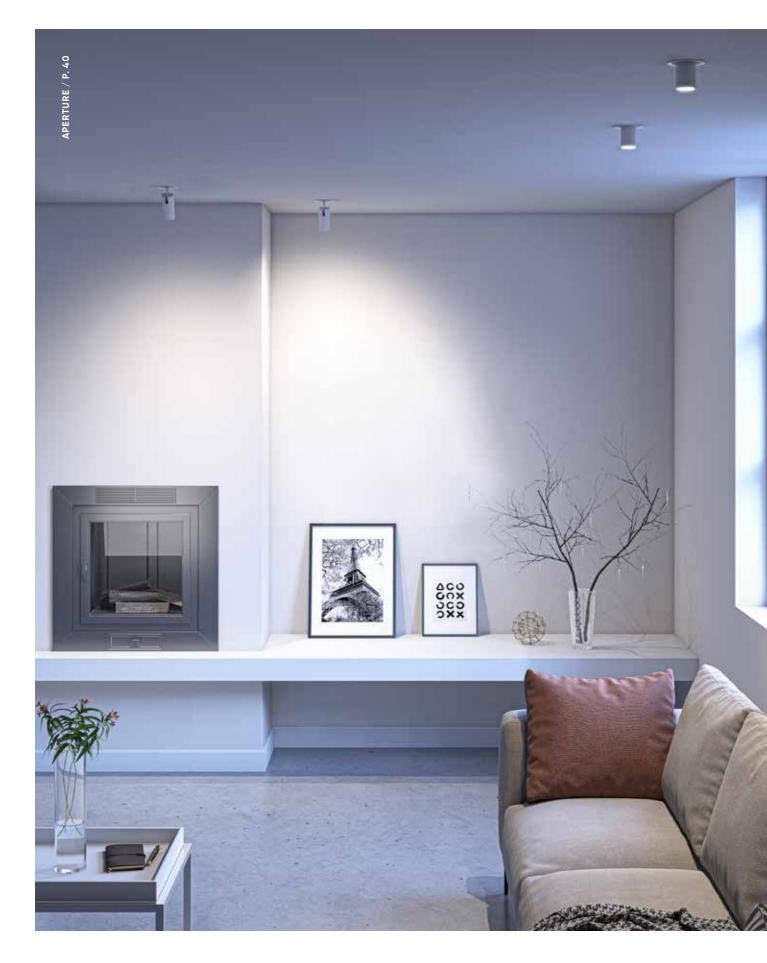

Boulevard


The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.









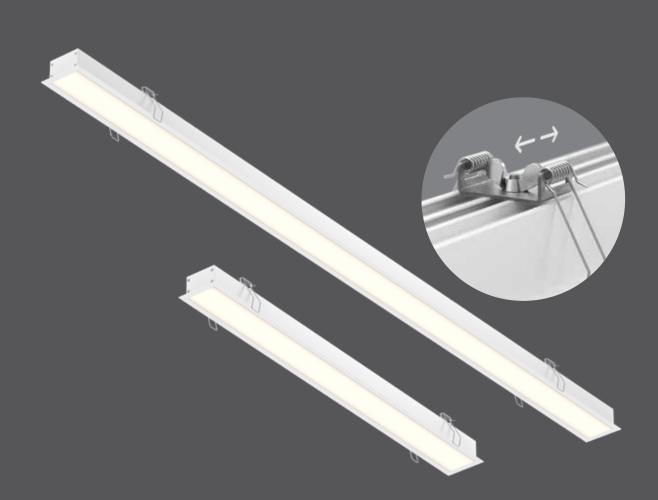

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LNR24-CC	24"	20 W	1725 lm	90	2700, 3000, 3500,	120 V
LNR24-CC-V*	24"	20 W	1725 lm		4000, 5000 K	120, 277, 347 V
LNR48-CC	48"	40 W	3760 lm			120 V
LNR48-CC-V*	48"	40 W	3760 lm			120, 277, 347 V

* 0-10V dimming

Specifications

Every fixture includes a junction box with

Superior LED performance and lifespan

integrated dimmable driver

Can be daisy chained

Minimal heat emission

Aluminum construction

contact with insulation)

Suitable for dry locations

Ideal operating temperature:

108° beam spread

-20° to 40° C

5-year warranty

Switch-selectable CCT: 2700K/

3000 K/3500 K/4000 K/5000 K

IC certification (suitable for direct

Air-tight certified as per ASTM E283-04

Refer to website for dimmer compatibility

Finish

○ WH White

Accessories LNACC-L16FT 16-foot lens for Boulevard series pendants and recessed linears

RFP-LNR24

Rough-in plate

RFP-LNR48


Rough-in plate

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.
















Records a family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
GBR35-CC	3.5"	12 W	860 lm	90	2700, 3000, 3500,	120 V
GBR06-CC	6"	20 W	1600 lm		4000, 5000 K	

Specifications

Every fixture includes a junction box with an integrated driver Over 50,000 hours service life Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K 40° beam angle 30° tilting, 360° rotation Cast aluminum construction Suitable for wet locations Refer to website for dimmer compatibility IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 5-year warranty

Finish




Accessories RFP-UNI (GBR06) Universal rough-in plate

RFP-35 (GBR35) Rough-in plate RFP-46 (GBR06)


Rough-in plate

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

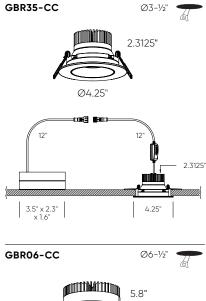








Facet

This versatile modern thin-trim 2, 4 and 6-inch gimbal with multi-directional adjustable swivel produces a bright glow with minimal glare as a result of its regressed light source. Ideal for general lighting or for areas requiring a directional light to showcase unique elements or to create dramatic wall-wash effects.

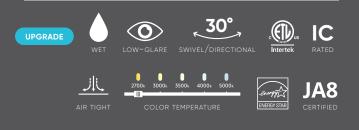



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
RGM2-CC	2"	8 W	660 lm	800 lm	90	2700, 3000, 3500, 4000,	120 V
RGM4-CC	4"	12 W	1200 lm	1400 lm		5000, 4000, 5000 K	
RGM6-CC	6"	20 W	1500 lm	1800 lm			

Specifications

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained (4" and 6" models only) Superior LED performance and lifespan Regressed light source Minimal heat emission Aluminum construction Switch-selectable CCT: 2700K/ 3000 K/3500 K/4000 K/5000 K IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 40° beam angle 30° tilting, 360° rotation Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish



Accessories RFP-UNI

Universal rough-in plate


RFP-23 Rough-in plate for 2" model

RFP-46

Rough-in plate for 4" and 6" models

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

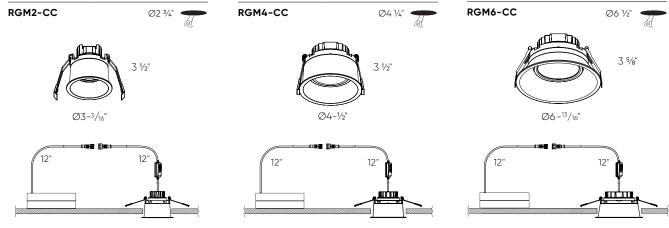

 $4'' \times 2'' \times 2''$

3-5/8" x 3-1/2" x 1-3/8"

5-5/8" x 3-1/2" x 1-7/16"

Pivot

When searching for lighting flexibility, look no further than our 3", 4" & 6" flat gimbal LED downlights. With powerful lumen output and the ability to direct light with a 360° rotation and a 90° tilt angle, this product will meet your every need.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
FGM4-3K	4"	9 W	740 lm	850 lm	90	3000 K	120 V
FGM3-CC	3"	6 W	570 lm	690 lm		2700, 3000, 3500,	120 V
FGM4-CC	4"	9 W	740 lm	850 lm		4000, 5000 K	120 V
FGM4-CC-V-WH*	4"	9, 10 W	740 lm	850 lm			120, 277 V
FGM6-CC	6"	14.5 W	1050 lm	1200 lm			120 V

* 0-10V dimming, white finish only

Specifications

Every fixture includes a junction box with integrated dimmable driver	
Can be daisy chained	C
Superior LED performance and lifespan	C
90° tilting, 360° rotation	A
Minimal heat emission	R
Aluminum construction	U
Switch-selectable CCT: 2700K/	R
3000 K/3500 K/4000 K/5000 K*	R
Low profile	1.00
40° beam spread	
IC certification (suitable for direct contact with insulation)	
Air-tight certified as per ASTM E283-04	
Suitable for wet locations	
ldeal operating temperature: -20° to 40° C	

5-year warranty

Finish

- **BK** Black
- SN Satin Nickel (FGM4, FGM6 only)
- WH White

Accessories

REP-UNI


Jniversal rough-in plate

RFP-46


Rough-in plate for 4" and 6" models


Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

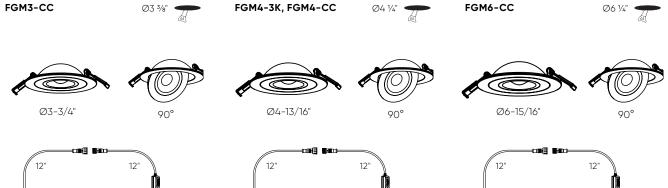

3-7/8" x 2-3/8" x 1-5/8"







3-5/8" x 3-1/2" x 1-3/8"

Pivot Duo

With an infinite choice of beam direction, Pivot Duo provides a discrete yet functional solution to general or accent lighting within your space.

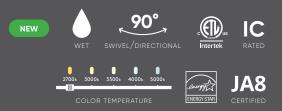

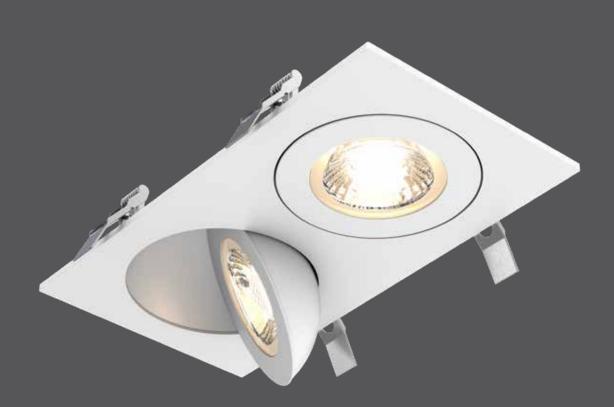

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
FGM4-CC-DUO	4"	18 W	1475 lm	1620 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V


Includes a junction box with integrated dimmable driver Can be daisy chained Superior LED performance and lifespan 90° tilting, 360° rotation Minimal heat emission Aluminum construction Switch-selectable CCT: 2700K/ 3000 K/3500 K/4000 K/5000 K Low profile 40° beam spread IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Ideal operating temperature: -20° to 40° C 5-year warranty

Finish

○ WH White

Accessories RFP-DUO Rough-in plate Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

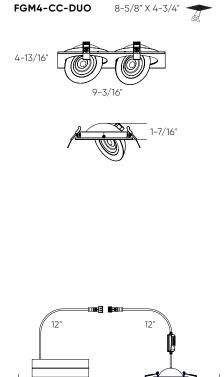

3-5/8" × 3-1/2" × 1-3/8"





Scope

There are moments when you want the ability to direct light as you please. With our LED Gimbal recessed fixture, this has now become a reality with the easiest of installations.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
GMB2-CC	2"	8 W	725 lm	900 lm	90	2700, 3000, 3500, 4000,	120 V
LEDDOWNG3-CC	3"	8 W	680 lm	750 lm		5000 K	
LEDDOWNG4-CC	4"	8 W	680 lm	750 lm			
GMB4-CC	4"	11 W	810 lm	1000 lm			

models only)

Low profile

40° beam spread

JA8 Certified

-20° to 40° C

Every fixture includes a junction box with

Superior LED performance and lifespan

Switch-selectable CCT: 2700K/3000

IC certification (suitable for direct

Air-tight certified as per ASTM E283-04

Refer to website for dimmer compatibility

integrated dimmable driver

30° tilting, 360° rotation

Minimal heat emission

Aluminum construction

contact with insulation)

Suitable for wet locations

Ideal operating temperature:

K/3500 K/4000 K/5000 K

Can be daisy chained (3" and 4"

Finish

- **BK** Black SN Satin Nickel (3" and 4" models only)
- \bigcirc WH White

Accessories

RFP-UNI

Universal rough-in plate (3" and 4" models)

RFP-GMB2 Rough-in plate (2" model)

RFP-46

Rough-in plate (3" and 4" models)

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

GMB2-CC	Ø2 ¼"	LEDDOWNG3-CC	Ø2 3/4"
1-5/8"	2.5"	1.9" Ø3.375"	
4" x 2" x 2"	12" 12"	4" × 2" × 2"	
LEDDOWNG4-CC	Ø2 3/4"	GMB4-CC	Ø4 ¼"
2" Ø4.437		2.375" Ø4.81	
12"	12"	12" 3-5/8" x 3-1/2" x	12"

FT6 rated cable


5-year warranty



Revolve Duo

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.



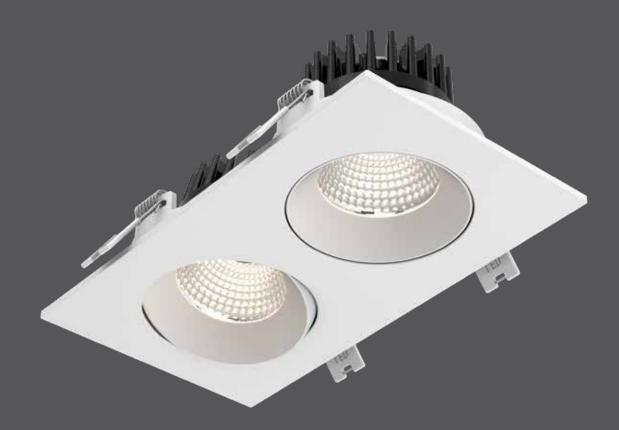

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
GBR35-CC-DUO	4"	24 W	1740 lm	1815 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

GBR35-CC-DUO

Includes a junction box with integrated dimmable driver Can be daisy chained Superior LED performance and lifespan 30° tilting, 360° rotation Minimal heat emission Aluminum construction Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K Low profile 40° beam spread IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Ideal operating temperature: -20° to 40° C 5-year warranty

7-1/8" x 3-1/2"


Æ

Finish

○ WH White

Accessories RFP-DUO Rough-in plate Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

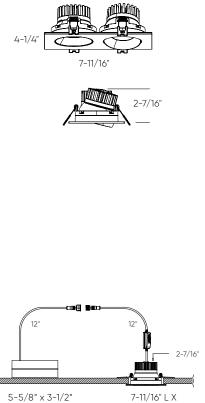

5/8" x 3-1/2" 7-11/16" x 1-7/16" 4-1/4"



Aperture







From residential use to art galleries & boutiques, our multi-function downlight will check all the boxes. You can choose between recessed or spotlight, control the beam angle, and tilt the head 90 degrees.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
MFD03-CC	3"	8 W	600 lm	750 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish			Note	
Over 50,000 hours of service life Every fixture includes a junction box with integrated dimmable driver		BK BlackWH White			Other color °T, finishes options are available 1 MOQ's and longer lear	out may require d times. Please	


Superior LED performance and lifespan

Universal rough-in plate

Accessories

RFP-UNI

contact your DALS representative for more information.



Switch-selectable CCT: 2700 K/3000 K/

Adjustable beam angle from 30° to 60° IC certification (suitable for direct

Air-tight certified as per ASTM E283-04

Refer to website for dimmer compatibility

3500 K/4000 K/5000 K

Can be daisy chained

90° tilting, 360° rotation

contact with insulation)

JA8 Certified

MFD03-CC

5-year warranty



Ø3-3/8"

3<u>3</u>"






Pinpoint series

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light.





COLOR TEMPERATURE

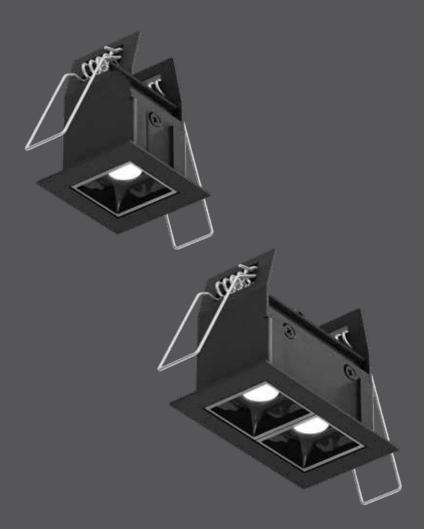

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
MSL1-CC	2"	3 W	120 lm	200 lm	90	2700, 3000, 3500,	120 V
MSL2-CC	3"	6 W	300 lm	400 lm		4000, 5000 K	

Over 50,000 hours of service life Every fixture includes a junction box with integrated dimmable driver Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Can be daisy chained Superior LED performance and lifespan Regressed light source Minimal heat emission Aluminum construction Suitable for dry locations Refer to website for dimmer compatibility 5-year warranty

Accessories

RFP-MSL1 Rough-in plate for MSL1


RFP-MSL2 Rough-in plate for MSL2


Finish



Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

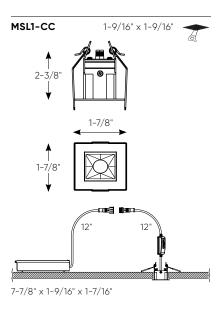

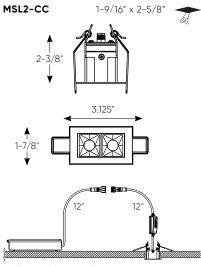

7-7/8" x 1-9/16" x 1-7/16"



Pinpoint series

This series provides a contemporary aesthetic and functional design to your space. Available in various styles, and framed by a powder-coat finish, these high-output fixtures deliver crisp, low-glare light. Available with pivoting multi-directional* optics or traditional fixed downlight.











Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
MSL4-CC	3"	12 W	600 lm	880 lm	90	2700, 3000, 3500,	120 V
MSL5-CC	7"	14 W	800 lm	1100 lm		4000, 5000 K	
MSL5G-CC	7"	14 W	800 lm	1100 lm			
MSL10-CC	13"	24 W	1500 lm	2200 lm			
MSL10G-CC	13"	24 W	1500 lm	2200 lm			

3-5/8" x 3-1/2"

x 1-3/8"

- Every fixture includes a junction box with integrated dimmable driver Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Can be daisy chained Superior LED performance and lifespan Regressed light source Aluminum construction
- 30 degree swivel (models MSL5G and MSL10G only) IC rated Low-glare Suitable for dry locations Refer to website for dimmer compatibility 5-year warranty

Accessories

RFP-MSL4 Rough-in plate for MSL4

RFP-MSL5 Rough-in plate for MSL5

RFP-MSL5G Rough-in plate for MSL5G

RFP-MSL10 Rough-in plate for MSL10

RFP-MSL10G

Rough-in plate for MSL10G





Note

3/8

-7/8"

2-3/8


1-7/8"


12

12

5-5/8" x 3-1/2"

x 1-7/16"

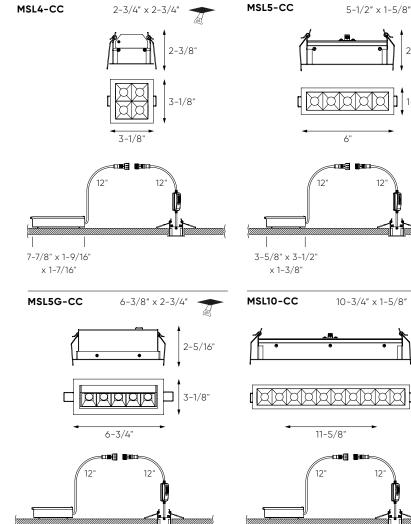

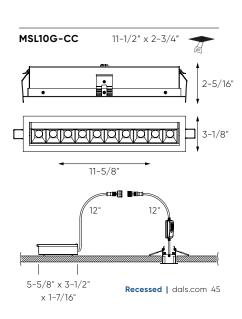



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
RGR2-CC	2"	8 W	600 lm	750 lm	90	2700, 3000, 3500,	120 V
RGR4-CC	4"	14 W	1100 lm	1200 lm		4000, 5000 K	120 V
RGR4-CC-V-WH*	4"	14, 15 W	1100 lm	1200 lm			120, 277 V
RGR6-CC	6"	20 W	1600 lm	1900 lm			120 V

* 0-10V dimming, white finish only

Specifications

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained (4" and 6" models only) Superior LED performance and lifespan Regressed light source Minimal heat emission Aluminum construction Switch-selectable CCT: 2700K/ 3000 K/3500 K/4000 K/5000 K IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 40° beam angle Suitable for wet locations JA8 Certified Ideal operating temperature: -20° to 40° C 5-year warranty

Finish

\bullet	BK	Black
	SN	Satin Nickel
\bigcirc	WH	White


Accessories


RFP-23 Rough-in plate for RGR2

RFP-46

Rough-in plate for RGR4 and RGR6

Note

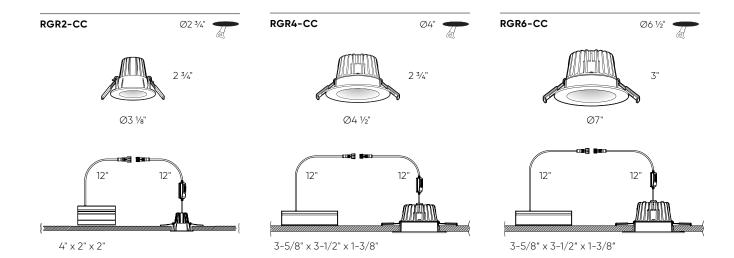

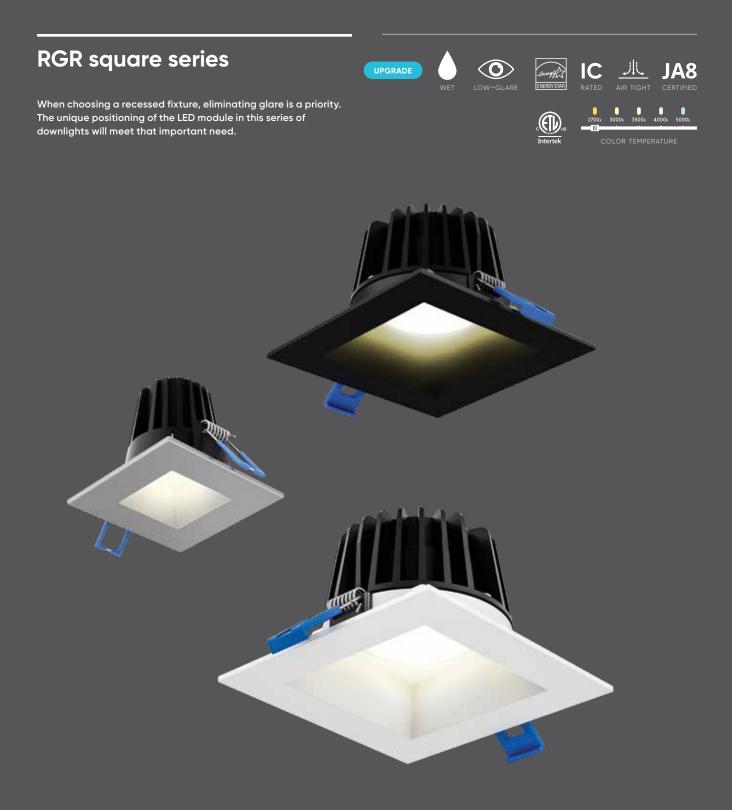

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
RGR2SQ-CC	2"	8 W	600 lm	750 lm	90	2700, 3000, 3500,	120 V
RGR4SQ-CC	4"	14 W	1100 lm	1200 lm		4000, 5000 K	120 V
RGR4SQ-CC-V-WH*	4"	14, 15 W	1100 lm	1200 lm			120, 277 V
RGR6SQ-CC	6"	20 W	1600 lm	1900 lm			120 V

* 0-10V dimming, white finish only

Specifications

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained (4" and 6" models only) Superior LED performance and lifespan

Regressed light source

Minimal heat emission

Aluminum construction Switch-selectable CCT: 2700K/ 3000 K/3500 K/4000 K/5000 K

IC certification (suitable for direct contact with insulation)

Air-tight certified as per ASTM E283-04

40° beam angle


Suitable for wet locations

JA8 Certified

Ideal operating temperature: -20° to 40° C

5-year warranty

Finish




Accessories

RFP-23 Rough-in plate for RGR2SQ

RFP-46

Rough-in plate for RGR4SQ & RGR6SQ

Note

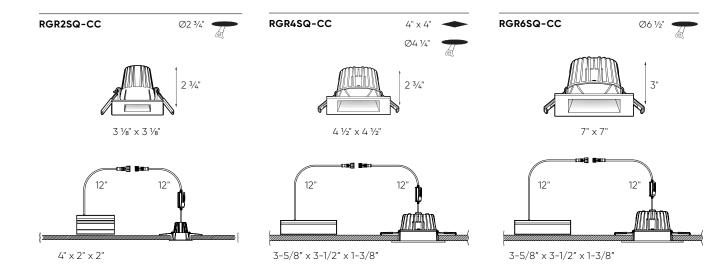


Indirect





IC RATED

Imagine being able to create the perfect mood when dimming your lights. This is now possible with our Dim to Warm concept, generating a warm, exquisite glow to set the tone for your evening.

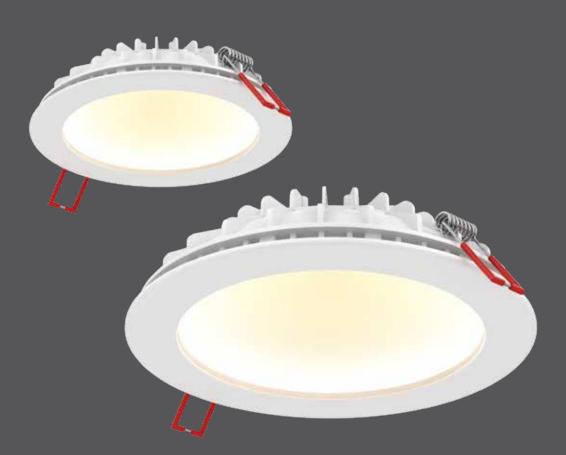

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
IND4-DW	4"	9 W	500 lm	975 lm	80	3000 K - 2200 K	120 V
IND6-DW	6"	12 W	750 lm	1500 lm	80	3000 K - 2200 K	120 V

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained Over 50,000 hours of service life Dim-to-warm technology, dims from 3000 K to 2200 K to mimic incandescent light Smooth 360° wide spread Minimal heat emission Dome reflector 110° beam spread Indirect lighting design with glare reduction Aluminum construction IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty

Finish

WH White

Accessories

RFP-UNI

Universal rough-in plate


RFP-46

Rough-in plate for 4" and 6" models


Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



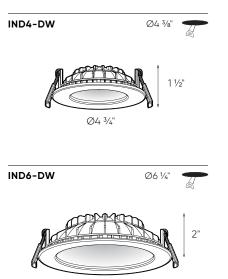

Ø6 ¾"



5-1/16" x 3" x 1-5/16"

Hilux

Dals' new high-powered recessed downlight is a go-to for your commercial projects. With its five color temperatures to choose from, a cast aluminum housing, high lumen output, and indoor/outdoor rating, this can be installed just about anywhere. From clinics to schools and hotels to boutiques, this is the only recessed fixture you will need.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
HPD4-CC	4"	20 W	1415 lm	1555 lm	90	2700, 3000, 3500,	120 V
HPD4-CC-V-WH*	4"	20, 22, 24 W	1415 lm	1555 lm		4000, 5000 K	120, 277, 347 V
HPD6-CC	6"	30 W	2100 lm	2310 lm			120 V
HPD6-CC-V-WH*	6"	27, 30, 33 W	2100 lm	2310 lm			120, 277, 347 V
HPD8-CC	8"	40 W	2600 lm	2850 lm			120V
HPD8-CC-V-WH*	8"	38, 40, 43 W	2600 lm	2850 lm			120, 277, 347 V

* 0-10V dimming, white finish only

Specifications

5-year warranty

Every fixture includes a junction box with an integrated driver Over 50,000 hours service life Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Smooth 360° wide spread 90° beam angle Cast aluminum construction Suitable for wet locations Refer to website for dimmer compatibility IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04

Finish

BK Black (HPD4 and HPD6 only)
 WH White

Accessories

RFP-UNI Universal rough-in plate


RFP-46 (HPD4, HPD6) Rough-in plate

RFP-58 (HPD8) Rough-in plate


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.











Ø8 ¾"

Etch

The Etch range of circular recessed downlights, characterized by a deep-set LED position, provides a functional solution to general lighting without the uncomfortable glare.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DDP4-CC	4"	15 W	1000 lm	90	2700, 3000, 3500,	120 V
DDP6-CC	6"	20 W	1500 lm		4000, 5000 K	

Every fixture includes a junction box with an integrated driver Over 50,000 hours of service life Can be daisy chained Smooth 360° wide spread 125° beam angle Minimal heat emission Frosted lens Edge lit technology Cast aluminum construction Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Very low profile IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Ideal operating temperature: -20° to 40° C Refer to website for dimmer compatibility 5-year warranty

Finish

WH White


Accessories RFP-46 Rough-in plate


RFP-UNI Universal rough-in plate

DDP4-TRIM-BK 4" recessed panel trim in black

DDP6-TRIM-BK 6" recessed panel trim in black

Note

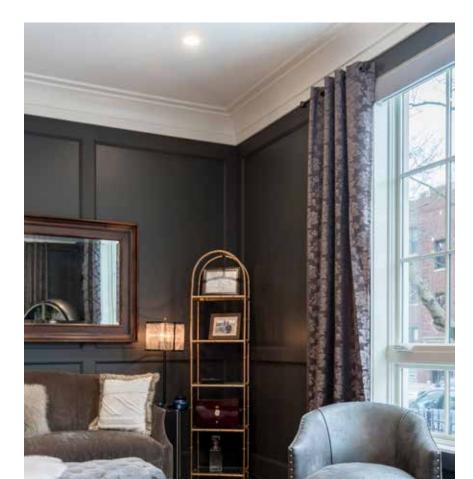

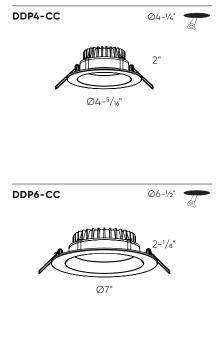

Notch

The Notch series of regressed downlights is characterized by a deep-set LED position which greatly reduces glare, neatly packaged in a price-conscious solution to general lighting.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DRR4-CC	4"	11 W	800 lm	90	2700, 3000, 3500,	120 V
DRR4-CC-V*	4"	11 W	800 lm		4000, 5000 K	120, 277 V
DRR6-CC	6"	14 W	1000 lm			120 V
DRR6-CC-V*	6"	14 W	1000 lm			120, 277 V

* 0-10V dimming

Specifications

Every fixture includes a junction box with an integrated driver Over 50,000 hours of service life Can be daisy chained Smooth 360° wide spread 100° beam angle Frosted lens Edge lit technology Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Ideal operating temperature: -20° to 40° C Refer to website for dimmer compatibility 5-year warranty

Finish

WH White

Options DRR4-3K-DRIVER Driver for 3000 K output

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Accessories

RFP-46 Rough-in plate

RFP-UNI Universal rough-in plate

DRR4-TRIM-BK 4" recessed panel trim in black

DRR4-TRIM-SBA 4" recessed panel trim in sandblasted aluminum

DRR6-TRIM-BK 6" recessed panel trim in black

DRR6-TRIM-SBA 6" recessed panel trim in sandblasted aluminum



DRR4-CC $Q4-y_{a}$

3-5/8" x 3-1/2" x 1-3/8"


Mystique

If you are looking for a sleek, attractive LED option for your ceilings, then our color changing panel light with interchangeable trims is the perfect choice. With the flick of a switch, you have the ability to select one of three pre-set color temperatures – 3000, 4000 and 5000 K – convenience at your fingertips.







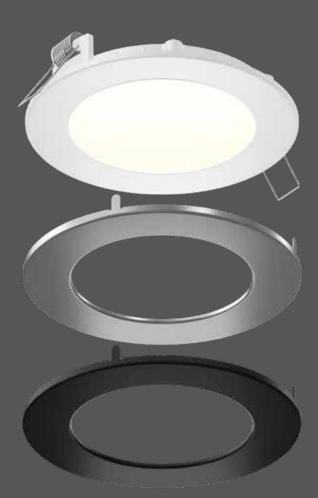

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SPN4-CC-3T	4"	11 W	800 lm	850 lm	90	3000-4000-5000 K	120 V
SPN6-CC-3T	6"	14 W	1060 lm	1100 lm	90	3000-4000-5000 K	120 V

SPN4-CC-3T

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained Minimal heat emission Aluminum construction IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Over 50,000 hours of service life 3 interchangeable trim colors included Switch-selectable CCT: 3000 K/ 4000 K/5000 K 110° beam angle Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish

BK Black SN Satin Nickel WH White ()

Accessories

REC-PT4-BB (SPN4-CC-3T)

4" recessed panel trim in brushed brass

REC-EXT108

108" extension cable

RFP-UNI


Universal rough-in plate

RFP-46

Rough-in plate for 4" and 6" models

Note


Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.




Ø4 ¼"







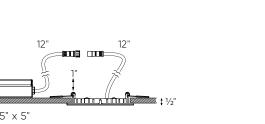



Mystique square


These highly stylish, ultra-slim recessed fixtures with black, satin nickel and white interchangeable trims serve a fundamental and practical purpose that allow to easily decide on-site what your ceilings will look like. For even greater flexibility, these fixtures emanate a soft, even light with a switch-selectable color temperature of 3000, 4000 or 5000 K. A truly complete package for your lighting and designing needs.







JA8 Certified

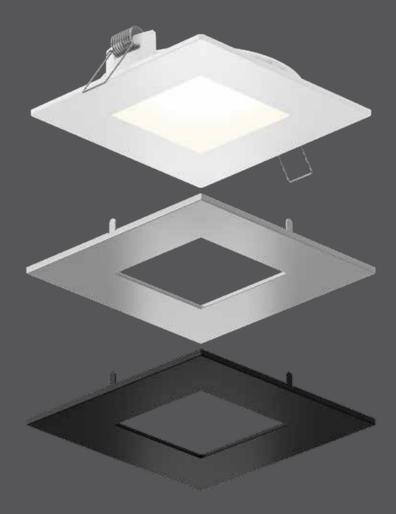

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SPN4SQ-CC-3T	4"	11 W	800 lm	850 lm	90	3000-4000-5000 K	120 V
SPN6SQ-CC-3T	6"	14 W	1060 lm	1100 lm	90	3000-4000-5000 K	120 V

Every fixture includes a junction box with integrated dimmable driver Can be daisy chained

Aluminum construction

IC certification (suitable for direct

contact with insulation)

Air-tight certified as per ASTM E283-04

Over 50,000 hours of service life

3 interchangeable trim colors included Switch-selectable CCT: 3000 K/

4000 K/5000 K

110° beam angle

Suitable for wet locations

Refer to website for dimmer compatibility

Ideal operating temperature: -20° to 40° C

5-year warranty

Finish

BK Black
SN Satin Nickel
WH White

Accessories


REC-EXT108 108" extension cable

RFP-UNI Universal rough-in plate

RFP-46 Rough-in plate for 4" and 6" models


Note



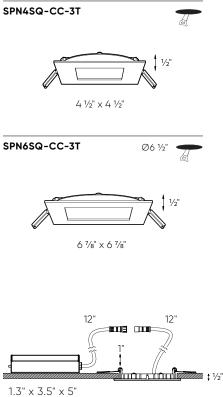

Excel

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.

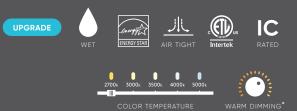



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
5003-CC	3"	8 W	560 lm	640 lm	80	2700, 3000, 3500,	120 V
5004-CC	4"	11 W	770 lm	880 lm		4000, 5000 K	
5005-CC	5"	12 W	800 lm	980 lm			
5006-CC	6"	14 W	1100 lm	1120 lm			
5004-DW*	4"	11 W	850 lm	880 lm		3000-2200 K	


*Dim-to-warm technology, dims from 3000 K to 2200 K

Specifications

Every fixture includes a junction box with an integrated driver Over 35,000 hours of service life Can be daisy chained Minimal heat emission Edge lit technology Cast aluminum construction Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Very low profile IC certification (suitable for direct

contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Ideal operating temperature: -20° to 40° C Refer to website for dimmer compatibility 5-year warranty

Finish



Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Accessories

REC-PT4-BB (5004) 4" recessed panel trim in brushed brass

REC-PT4-BK (5004) 4" recessed panel trim in black

REC-PT4-SN (5004) 4" recessed panel trim in satin nickel

REC-EXT108 108" extension cable


RFP-23 (5003) Rough-in plate


RFP-46 (5004, 5006) Rough-in plate

RFP-58 (5005) Rough-in plate

RFP-UNI (5003, 5004, 5006)


Universal rough-in plate









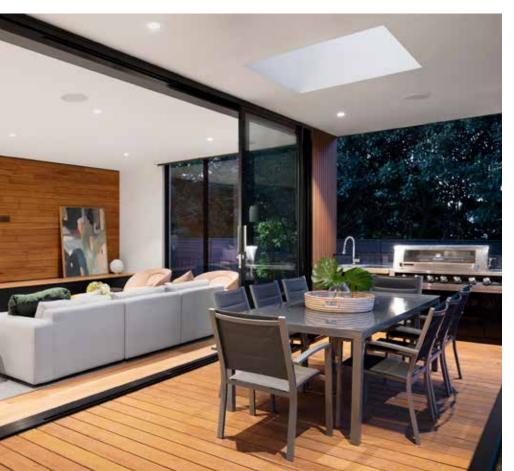

Excel square

When looking for a modern design, a square lighting fixture is often the best choice. Even better, imagine being able to use a round cutout for installation. This is now a reality with the improved concept of this square panel light.







COLOR TEMPERATURE



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
5004SQ-CC	4"	11 W	770 lm	880 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

Every fixture includes a junction box with an integrated driver Over 35,000 hours of service life Can be daisy chained Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Frosted lens Edge lit technology Aluminum construction Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K Very low profile IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish



Accessories

REC-EXT108 108" extension cable

RFP-46 (5004SQ-CC)

Rough-in plate

RFP-UNI


Universal rough-in plate

Note

Other color °T, finishes, and voltage options are available but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



4 ½" x 4 ½" (D) x ½"



5.1" x 3" x 1.25"



Access

LED panel lights are more accessible than ever before. The sleek and minimal construction allows for the easiest of installations.







Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
2004	4"	11 W	770 lm	880 lm	80	3000 K	120 V
2006	6"	14 W	1100 lm	1120 lm	80	3000 K	120 V

Every fixture includes a junction box with an integrated driver Over 35,000 hours of service life Can be daisy chained Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Frosted lens Edge lit technology Aluminum construction Very low profile IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty

Finish

WH White

Accessories

REC-PT4-BB (2004) 4" recessed panel trim in brushed brass

REC-PT4-BK (2004) 4" recessed panel trim in black

REC-PT4-SN (2004) 4" recessed panel trim in satin nickel


REC-EXT108 108" extension cable

REC-EXT230 230" extension cable

RFP-46 Rough-in plate

RFP-UNI Universal rough-in plate

Note

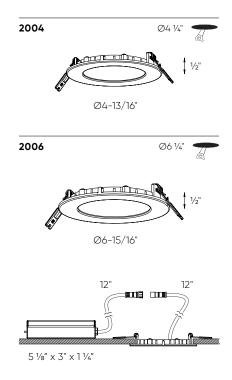



Alter series

The aluminum retrofit LED panel offers the easiest and most practical solution to your existing lighting needs. For style and convenience, the removable outer trim attaches with magnetic fasteners to create a seamless look. Can be easily retrofitted in existing 4" canisters or standard octagonal junction boxes.



COLOR TEMPERATURE*



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
RTF4-3K	4"	9 W	550 lm	630 lm	90	3000 K	120 V
RTF4-CC	4"	9 W	580 lm	630 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V

Fits on octagonal junction boxes Fire rated alternative when mounted onto a fire rated junction box Includes A-19 socket Fits into 4" recessed housings Minimal heat emission Aluminum construction Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K (model RTF4-CC only) Over 50,000 hours of service life Magnetic trim finish Air-tight certified as per ASTM E283-04 Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish

- **BK** Black
- SN Satin Nickel
- **WH** White

Accessories

RTF4-TRIM-BK 4" recessed panel trim in black


RTF4-TRIM-SN

4" recessed panel trim in satin nickel

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.


RTF4-3K, RTF4-CC

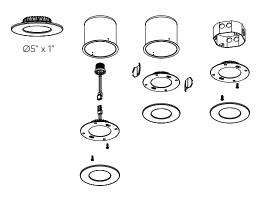



Alter series

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation. The change will be illuminating.

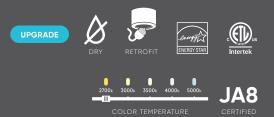




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDPNLRTF56-CC	6"	10 W	720 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish		Note	
Over 30,000 hours of Integrated dimmable Switch-selectable CC 3500 K/4000 K/5000 Aluminum trim and ho Minimal heat emission Frosted lens Edge-lit technology Very low profile Aluminum heatsink an 120V AC, A19 bulb repl Fits into 5-1/2" to 6" red Suitable for dry locatii Refer to website for dri Ideal operating tempo -20° to 40° C	driver IT: 2700 K/3 K using n d thermal acement cessed hou ons immer corr	3000 K/ protection usings	○ WH White		Other color °T and fini may require MOQ's ar Please contact your D for more information.	nd longer lead times.



LEDPNLRTF56-CC



Accessories

Model	Description		Specifications
RFP-UNI	Universal drilling plate	Ø2 3/4"	Expandable with on-center spacing up to 24"
		Ø3 3/8" Ø4 1/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
		Ø6 1/2"	Adds extra support and allows for easy and quick installation
			Galvanized steel finish
RFP-GMB2	Drilling plate for GMB2-CC recessed fixture	Ø2-1/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
			Adds extra support and allows for easy and quick installation
			Galvanized steel finish
RFP-23	Drilling plate for 2 and 3" fixtures	Ø2-3/4" Ø3-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
			Adds extra support and allows for easy and quick installation
			Galvanized steel finish
RFP-35	Drilling plate for 3.5" fixtures	Ø3-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
		=	Adds extra support and allows for easy and quick installation
		=	Galvanized steel finish
RFP-46	Drilling plate for 4 and 6" fixtures	Ø4-1/4" Ø6-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
		=	Adds extra support and allows for easy and quick installation
			Galvanized steel finish
RFP-58	Drilling plate for 5 and 8" fixtures	Ø5-3/8" Ø7-1/2"	Plates serve as template for cutting precise product openings (Please refer to product cut size)
		=	Adds extra support and allows for easy and quick installation
			Galvanized steel finish


Model	Description		Specifications			
RFP-MSL1	Drilling plate for MSL1 recessed fixture	1-9/16" x 1-9/16"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
			Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			
RFP-MSL2	Drilling plate for MSL2 recessed fixture	1-9/16" x 2-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
		, -	Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			
RFP-MSL4	Drilling plate for MSL4 recessed fixture	2-3/4" x 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
		2 07 1	Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			
RFP-MSL5	Drilling plate for MSL5	5-1/2" x	Plates serve as template for cutting precise product openings			
	recessed fixture	1-5/8"	(Please refer to product cut size)			
			Adds extra support and allows for easy and quick installation Galvanized steel finish			
RFP-MSL5G	Drilling plate for MSL5G recessed fixture	6-3/8" x 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
			Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			
RFP-MSL10	Drilling plate for MSL10 recessed fixture	10-3/4" x 1-5/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
			Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			
RFP-MSL10G	Drilling plate for MSL10G recessed fixture	11-1/2" × 2-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size)			
			Adds extra support and allows for easy and quick installation			
			Galvanized steel finish			


Accessories

Model	Description		Specifications
RFP-LNR24	Drilling plate for LNR24-CC, LNR24-CC-V, DCP-LNR24 recessed linears	2-1/8" x 23-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-LNR48	Drilling plate for LNR48-CC, LNR48-CC-V, DCP-LNR48 recessed linears	2-1/8" x 47-3/8"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish
RFP-DUO	Drilling plate for FGM4-CC-DUO and GBR35-CC-DUO recessed fixtures	7-1/8" x 3-1/2" 8-5/8" X 4-3/4"	Plates serve as template for cutting precise product openings (Please refer to product cut size) Adds extra support and allows for easy and quick installation Galvanized steel finish

Model		Finish	Specification
LEDDOWNACC-GOOF3	Ø3-3/8" Ø5-1/4"	White	Goof ring for 3" recessed lights Allows 3" fixtures to fit in a hole with a maximum diameter of 4-3/4"
LEDDOWNACC-GOOF4	Ø4-3/8" Ø6-1/2"	White	Goof ring for 4" recessed lights Allows 4" fixtures to fit in a hole with a maximum diameter of 6"
LEDDOWNACC-GOOF6	Ø6-1/2" Ø8-1/2"	White	Goof ring for 6" recessed lights Allows 6" fixtures to fit in a hole with a maximum diameter of 8"

Model		Finish	Specification
REC-EXT108	₽₩□□₽₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩₩	White	108" extension cord for recessed lights One end with male connector and one end with female connector Quick-connect installation Can be connected together up to 40 feet (4 extension cords)
REC-EXT230	₽₩□□ ↓ 230" →	White	230" extension cord for recessed lights One end with male connector and one end with female connector Quick-connect installation Can be connected together up to 40 feet (2 extension cords)
REC-PT4-BB REC-PT4-BK REC-PT4-SN	000	Brushed Brass Black Satin Nickel	4" recessed panel trim Compatible products: SPN4, 2004, 5004, SM-PNL4
RTF4-TRIM-BK RTF4-TRIM-SN	00	Black Satin Nickel	4" recessed panel trim Compatible products: RTF4-3K, RTF4-CC
DDP4-TRIM-BK DDP6-TRIM-BK	00	Black	4" and 6" regressed panel trims Compatible products: DDP4-CC, DCP-DDP4, DDP6-CC, DCP-DDP6
DRR4-TRIM-BK DRR4-TRIM-SBA DRR6-TRIM-BK DRR6-TRIM-SBA		Black Sandblasted aluminum	4" and 6" regressed panel trims Compatible products: DRR4-CC, DRR6-CC

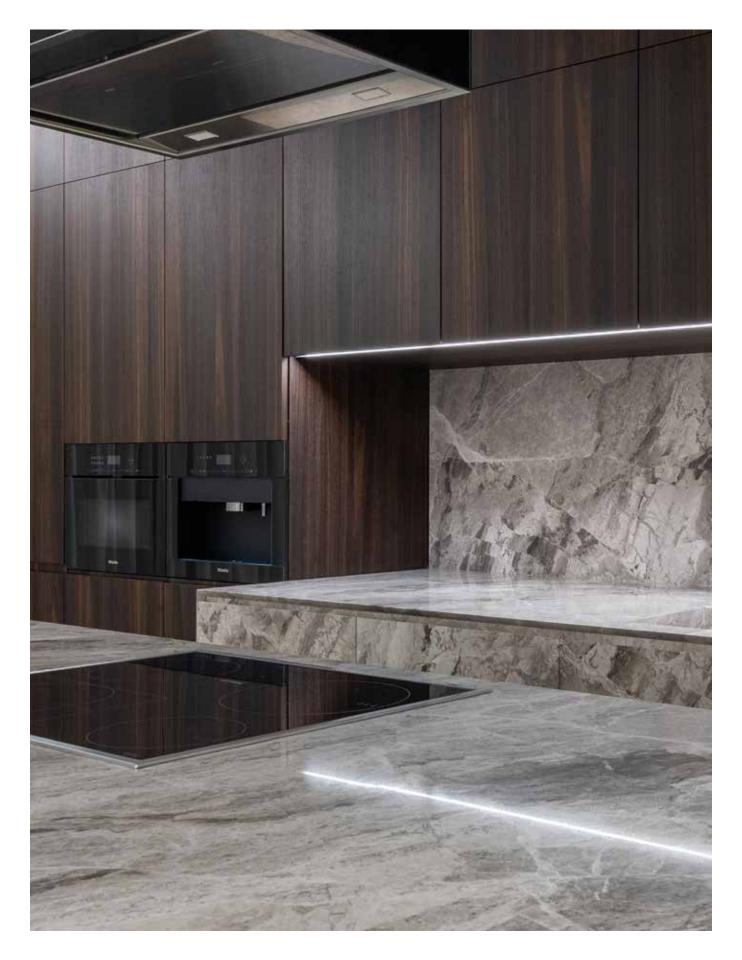

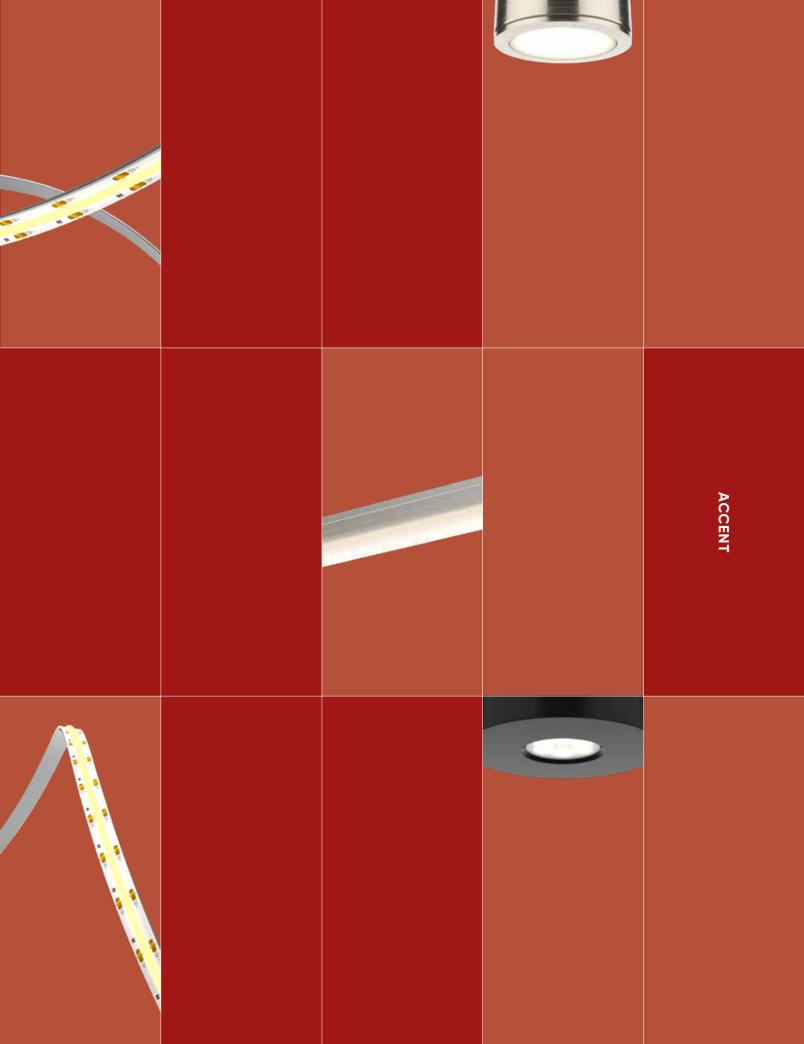





POWERLED LINEAR 6009CC/ 6012CC/ 6024CC/ 6036CC/ 6048CC



90 PROLED LINEAR HLF09/ HLF12/ HLF18/ HLF24/ HLF30

324 SMART LINEAR SM-UCL12/ SM-UCL24/ SM-UCL36



COUNTERLED LINEAR

9009CC/ 9012CC/

9018CC /9024CC/

SUPER-PUCK RECESSED





98

ULTRA-SLIM PUCK

4006

326

SMART PUCK

SM-UPK5

SM-UP1/ SM-UPK3/



100

6001

102

MINI-PUCK

LEDRDM1

92

9030CC



104

ECO-PUCK

LEDRDP18

94

4001

4001HP

96

DUO-PUCK

4005FR

4005HP K4005FR

320 SMART TAPE SM-TAP1M/ SM-TAP3M SM-TAP5M



SMART OUTDOOR TAPE SM-OTP24FT SM-OTPACC8FT



106 LED DIMMABLE DRIVERS




POWERLED PUCK

110 ACCESSORIES





Accent | dals.com 78

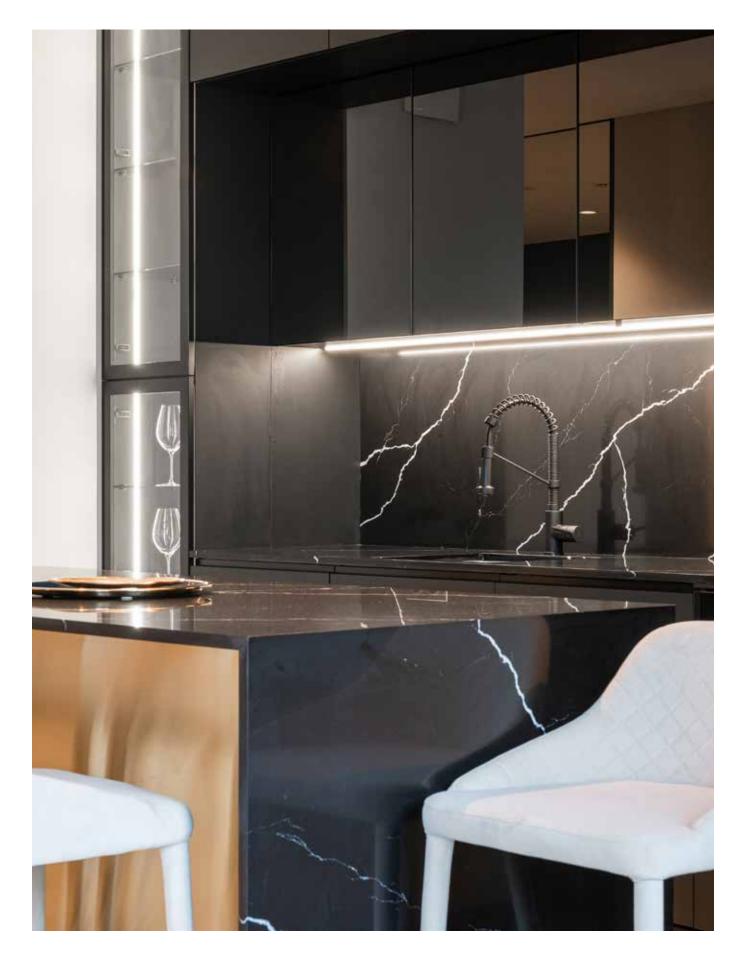

Proper Sizing, Spacing and Lighting Techniques

As its name suggests, under cabinet lighting refers to lights that are installed under a cabinet, resulting in illumination of the area immediately below a section of cabinets. It is most commonly used in kitchen areas, where additional lighting is useful for food preparation.

Types of under cabinet lighting






Puck lights

Pucks are the most versatile product as they can be installed in any application. Most of our pucks can either be installed as a surface mount or recessed into the cabinetry so that they are flush to the surface. Our pucks are designed to provide smooth and uniform light output.

Linears

Linears are great for efficient and uniform solutions. Our linears are all designed to be surface mounted and many of them can also pivot to focus them on other features such as the backsplash. Most linears come in a variety of sizes, so combined together they can cover the length of most surfaces.




Tape lights


Tape lights, a flexible roll of LED's with an adhesive back that can virtually be installed in any application, even beyond under cabinet lighting. Tape lights have a super low profile and easy to install.

How many do I need?

If you are installing pucks, we recommend spacing them approximately 24" apart. For linears, you can either install them seamlessly from end to end or leave a gap equivalent to the size of the product.

Power source





Low-voltage (12V)

Low-voltage systems include two parts: the light fixture and the driver. You would typically use one driver to power several products. The advantages of low-voltage are that the light fixture can often be sleeker as less components are required and since the wiring from the driver to the fixtures is low-voltage it is much thinner and less restrictive.

Direct wire (120 V)

120V direct means that no other components are required to power the product. Either the LED's are 120V direct or a driver is integrated in each product. The advantage of a 120V product is the ease of installation.

Choosing the right Driver

We offer a wide range of plug-in (A) and direct wire drivers (B). To select the right driver, simply add up the wattage from all your lights and choose a driver with a higher wattage.

Connections

Direct wire

Direct wire systems are typically installed by electrical contractors, it means that the power feed is connected directly inside the product or driver, without any plugs therefore no exposed wires. Direct wire installations must be enclosed in a connection box with a minimal volume for a safe connection. All of our direct wire products have the connection box built in to them with convenient knock-outs to discretely pass the wiring.

Plug-in


Plug-in options are really easy to install as they plug directly into an electrical outlet.



For optimal dimming try to use up at least 50% of the driver's capacity. For example, if all products come up to 10 watts, you would be much better off with a 12W driver than a 24W driver.

COB-tape

This tape will not only emit a wonderful warm glow, but give you continuous, seamless light. You can cut it every 2 cm and re-attach with the supplied connectors. No more waste.

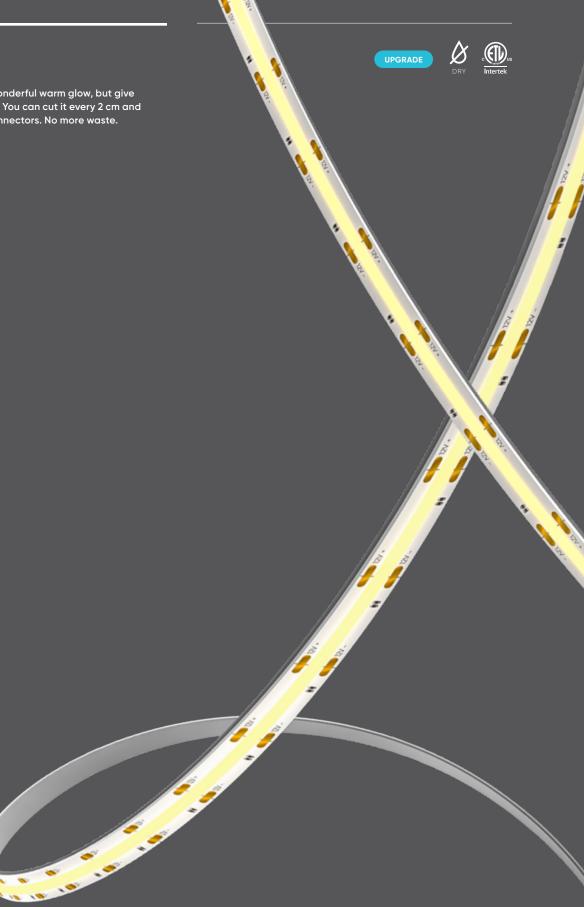

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
СОВТРІМ	1m (39")	12 W	550 lm	90	3000 K	12 V
СОВТРЗМ	3m (118")	24 W	1500 lm	90	3000 K	12 V
СОВТР5М	5m (196")	48 W	2250 lm	90	3000 K	12 V
COBTP-REEL*	20m (65')	8 W /meter	500 lm /meter	90	3000 K	12 V
COBTP-REEL-4K*	20m (65')	8 W /meter	500 lm /meter	90	4000 K	12 V

*20m COB reels do not include a 12V driver. Plug-in or hard-wired power supply required for installation. Sold separately.

Specifications

12V DC LED plug-in driver included (1m=12w / 3m=24w / 5m=48w) Excellent color rendering Seamless light emission (360 LEDs/meter) Warm white light output Superior LED performance and lifespan Over 50,000 hours of service life Can be cut at every cut mark (every 2cm) Maximum run length of 5m (196") in a series Dimmable with DALS dimming power supply and most low-voltage electronic dimmers Refer to website for dimmer compatibility 5-year warranty

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver

ETR-LED24WPI 12V DC/24W class 2 LED driver

Power supplies: hard-wired


BTO6DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM 48W dimmable LED hardwire driver

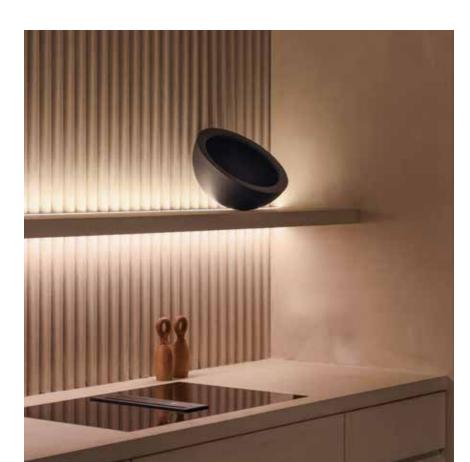

Accessories

COBTP-ALXT-BK 1 meter black aluminum extrusion with black lens

COBTP-ALXT-WH 1 meter white aluminum extrusion with white lens

COBTP-ALXT-L5M-BK 5 meter black lens for extrusions

COBTP-ALXT-L5M-WH 5 meter white lens for extrusions

COBTP-EXT02 2" extension with reconnect connectors

COBTP-EXT24 24" extension with reconnect connectors

COBTP-EXT60 60" extension with reconnect connectors

COBTP-CC06

Connection cord for hard-wired driver installation

СОВТР1М	1 x 1m
СОВТРЗМ	1 x 3m
СОВТР5М	1 x 5m
COBTP-REEL* * Driver not included	1 x 20m (65')

Cut section 13/16" (2 cm)

Linu



Our ultra-slim linear can be seamlessly connected together creating a long, break-free light emission.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LINU12	12"	4.3 W	400 lm	500 lm	90	3000 K	12 V
LINU04	4″	1.4 W	130 lm	160 lm	90	3000 K	12 V

Over 50,000 hours of service life 12" (30.5 cm) power cord included (model LINU12 only) Smooth linear wide spread Minimal heat emission No UV light emission Seamlessly interconnectable (No light breaks) Multiple fixtures can be linked together (Up to 6x LINU12 in series) Refer to website for dimmer compatibility 5-year warranty

Finish

SBA Sandblasted aluminum

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver

ETR-LED24WPI 12V DC/24W class 2 LED driver

Power supplies: hard-wired

BTO6DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM 48W dimmable LED hardwire driver

Accessories

LINU04 4" ultra-slim LED strip

LINU12-ACC-CROSS Illuminated cross-shaped connector

LINU12-ACC-L-LEFT Illuminated L-shaped connector

LINU12-ACC-L-RIGHT Illuminated L-shaped connector


LINU12-ACC-T-LEFT Illuminated T-shaped connector

LINU12-ACC-T-MIDDLE Illuminated T-shaped connector

LINU12-ACC-T-RIGHT Illuminated T-shaped connector

LINU12-EXT24 24" extension cord

LINU12-EXT108 108" extension cord

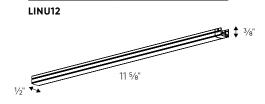

LINU04





SwivLED



To swivel or not to swivel is the question. With an ultra-slim profile, our LED strips can be fixed or flexible. Because you have both types of brackets included with each model, the choice is yours.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SWIVLED12	13.125"	3.2 W	270 lm	300 lm	80	3000 K	12 V
SWIVLED12-4K	13.125″	3.1 W	275 lm	300 lm	80	4000 K	12 V
SWIVLEDHP	13.125″	4.5 W	420 lm	600 lm	80	3000 K	12 V
SWIVLEDHP-4K	13.125″	4.5 W	440 lm	600 lm	80	4000 K	12 V

Over 50,000 hours of service life 10" (25 cm) power cord included Smooth linear wide spread Minimal heat emission No UV light emission Multiple fixtures can be linked together (Up to 8x SWIVLED in series Up to 4x SWIVLEDHP in series) Refer to website for dimmer compatibility 5-year warranty

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver ETR-LED24WPI 12V DC/24W class 2 LED driver

Power supplies: hard-wired BT06DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM

48W dimmable LED hardwire driver

Accessories

SWIVLED-EXT10 10" extension cord

SWIVLED-EXT36 36" extension cord

SWIVLED-EXT60 60" interconnection harness

SWIVLEDACC-45VCLIP 45° clips

SWIVLED-CC10-OUTPUT 10" output connector


Finish

SBA Sandblasted aluminum

SWIVLED_

*Add 12.5" for each additional unit



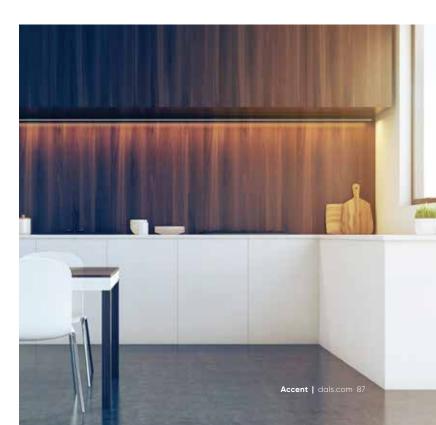

PowerLED linear

Long runs and flexibility are the primary features of our smooth PowerLED linears. A sleek, driverless connection ensures smooth and continuous light in every application.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
6009CC	9"	3 W	250 lm	300 lm	80	2700 K/ 3000 K/ 3500 K/	120 V
6012CC	12"	4 W	330 lm	400 lm	80	4000 K/ 5000 K	120 V
6024CC	24"	8 W	675 lm	800 lm	80		120 V
6036CC	36"	12 W	1080 lm	1200 lm	80		120 V
6048CC	48"	16 W	1300 lm	1800 lm	80		120 V

Switch-selectable CCT: 2700 K/3000 K/

3500 K/4000 K/5000 K Over 50,000 hours of service life

Dimmable with regular low-voltage

electronic dimmers

Smooth linear wide spread

Minimal heat emission

Robust construction

Multiple fixtures can be linked together

(up to 200W)

Refer to website for dimmer compatibility

5-year warranty

Accessories

6000-ACCE06 6" extension cord

6000-ACCE24 24" extension cord

6000-ACCE60 60" extension cord

6000-ACCLR Kit of left and right L connectors

6000-ACCPC 6' power cord

6000-JB Junction box


Finish

SBA Sandblasted aluminum

Note

Junction box model 6000-JB or power cord model 6000-ACCPC are required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

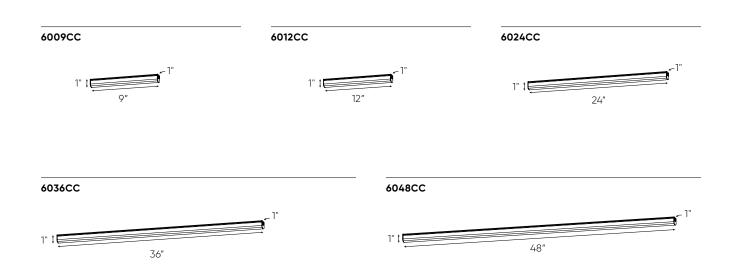

ProLED linear







Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
HLF09-3K	9"	3 W	200 lm	250 lm	90	3000 K	120 V
HLF12-3K	12"	4 W	380 lm	450 lm	90	3000 K	120 V
HLF18-3K	18"	8 W	675 lm	750 lm	90	3000 K	120 V
HLF24-3K	24"	12 W	900 lm	1000 lm	90	3000 K	120 V
HLF30-3K	30"	16 W	1100 lm	1200 lm	90	3000 K	120 V

Finish

 \bigcirc $\,$ WH $\,$ White $\,$

Accessories

30"


9000-ACCE24 24" extension cord

9000-ACCE72 72" extension cord

120 V direct connection or plug-in Dimmable with regular low-voltage electronic dimmers Over 50,000 hours of service life Interconnectable Robust construction

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

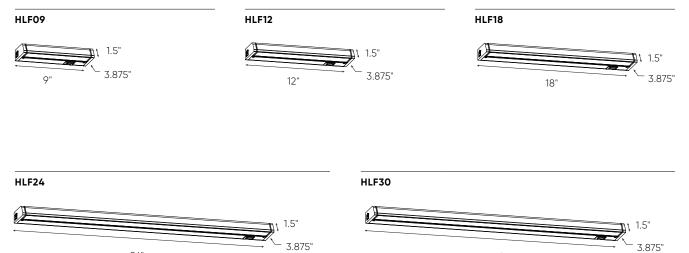

24"

CounterLED linear

When designing a linear, we always want our customers to have flexibility at their fingertips. This has become a reality with our CCT linear, as the toggle switch gives you the ability to choose between three color temperatures.



3000



CEDu Intertek Energy STAR



*Model 9009CC is plug-in only and comes with three selectable CCTs: 2700K, 3000K, 4000K

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
9009CC-WH*	9"	3 W	200 lm	280 lm	90	2700 K/ 3000 K/ 4000 K	120 V
9012CC-WH	12"	5 W	335 lm	450 lm	90	2700 K/ 3000 K/ 3500 K/	120 V
9018CC-WH	18"	8 W	560 lm	770 lm	90	4000 K/ 5000 K	120 V
9024CC-WH	24"	12 W	850 lm	1100 lm	90		120 V
9030CC-WH	30"	16 W	1115 lm	1600 lm	90		120 V

Adjustable light source

Switch-selectable CCT

120 V direct connection or plug-in*

Dimmable with regular low-voltage

electronic dimmers

Over 50,000 hours of service life

Interconnectable

Robust construction

Refer to website for dimmer compatibility

5-year warranty

Finish

○ WH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.


Accessories

9000-ACCE24

24" extension cord

9000-ACCE72

72" extension cord

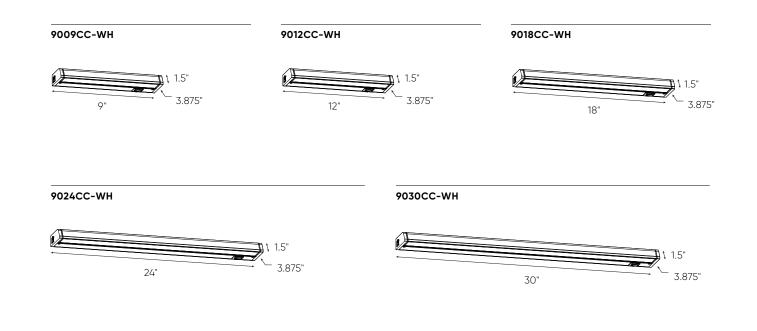

Super-puck recessed

Enjoy energy-saving white light in a variety of attractive finishes. These LED pucks are well suited to accent and task lighting under cabinets and in other areas.







Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
4001-CC	Ø2.625"	3 W	150 lm	90	2700, 3000, 3500,	12 V
					4000, 5000 K	

12V DC LED driver required Over 50,000 hours of service life 12" input lead with quick connector 24" interconnection harness included Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Heat sink and thermal protection Steel and aluminum construction Frosted glass lens Refer to website for dimmer compatibility 5-year warranty

Note:

4001-CC

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Ø2.375"

Finish

	вк	Black
	GD	Gold
	SN	Satin Nickel
\bigcirc	₩Н	White

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver ETR-LED24WPI

12V DC/24W class 2 LED driver

Power supplies: hard-wired

BT06DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM

36W dimmable LED hardwire driver **BT48DIM**

48W dimmable LED hardwire driver


Accessories

4000-E24 24" extension cord


4000-E60 60" extension cord

4000HRNS-24

24" interconnection harness



Ø2.625"







Duo-puck

UPGRADE



These robust LED pucks, featuring a frosted lens, deliver highly efficient punches of white light. Well suited for under-cabinet lighting and a variety of other applications.

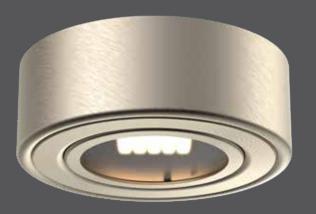

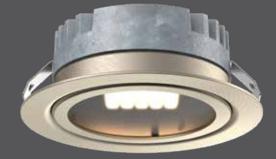

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
4005-CC	Ø2.625"	2 W	138 lm	80	2700, 3000, 3500,	12 V
K4005-CC	Ø2.625"	2 W*	138 lm*	80	4000, 5000 K	

*Per fixture

Specifications

12V DC LED driver required Over 50,000 hours of service life 12" input lead with quick connector 24" interconnection harness included Can be recessed or surface mounted Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Excellent color rendering Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Steel/aluminum construction Frosted glass lens Kits available Refer to website for dimmer compatibility

Note

5-year warranty

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Finish



Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver

ETR-LED24WPI 12V DC/24W class 2 LED driver

Power supplies: hard-wired

BTO6DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM

36W dimmable LED hardwire driver

BT48DIM


48W dimmable LED hardwire driver


Accessories


4000-E24 24" extension cord

4000-E60 60" extension cord

4000HRNS-24 24" interconnection harness







Ultra-slim puck

Thanks to its ¼" profile, our 12V ultra-slim LED puck can be integrated onto any surface. Available as a single unit or as a kit of 3, in both 3000K or 4000K¹. The choice is yours!





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
4006	Ø3.875"	3.6 W	250 lm	300 lm	90	3000 K	12 V

12V DC LED driver required (4006/4006SQ) Over 50,000 hours of service life 12" input lead with quick connector 24" interconnection harness included Warm white light output Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Heat sink and thermal protection JA8 Certified Refer to website for dimmer compatibility 5-year warranty

Note

Plug-in or hard-wired power supply required for installation when purchasing the single unit (4006). Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver ETR-LED24WPI

12V DC/24W class 2 LED driver

Power supplies: hard-wired BT06DIM-IC

6W dimmable LED hardwire driver
BT12DIM-IC

12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM 48W dimmable LED hardwire driver

Finish

BK Black
SN Satin Nickel
WH White


Accessories 4000-E24 24" extension cord

4000-E60 60" extension cord

4000HRNS-24 24" interconnection harness

4006-TRIM-BK Decorative trim in black

4006-TRIM-SN Decorative trim in satin nickel





PowerLED puck

Making life simple for our customers is always a priority for us. With a direct 120 V driverless connection, we have accomplished our goal with our PowerLED pucks.












Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage		
6001-CC	Ø2.875"	" 4 W 235 lm			2700, 3000, 3500, 4000, 5000 K	120 V		
Specifications	5	Finis	h		Note			
quick connec	output lead with tor wired to a junction k		SN Satin NickelWH White		Junction box model 6000 cord model 6001-PC are installation. Sold separat	required for		
Can be interconnected Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Recessed or surface mounted installation			essories O-JB otion box for 120 V series w 12" extension cord	ʻith	Other color °T and finishes available, bu may require MOQ's and longer lead tim Please contact your DALS representativ for more information.			
Surface adapter included Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission		fesnan	1-PC power cord					
			1-E24 extension cord					
Frosted lens Aluminum con Refer to webs 5-year warra	site for dimmer com	60" e	1-E60 extension cord					



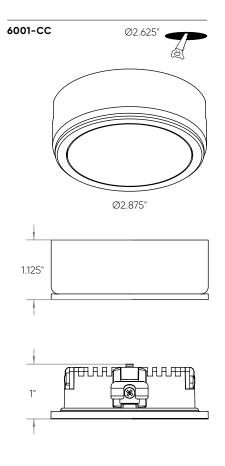

Mini-puck

Complete flexibility is now available with our mini LED pucks. Feel free to recess, surface mount or direct this warm LED light to attain your desired lighting effect.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDRDM1	Ø2"	1 W	80 lm	90 lm	80	3000 K	12 V

12V DC LED driver required Over 50,000 hours of service life 12" input lead with quick connector 24" interconnection harness included Warm white light output Excellent color rendering Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Can be recessed or surface mounted Surface adapter included Frosted lens Aluminum construction Gimbal LED module Refer to website for dimmer compatibility 5-year warranty Kits available

Finish

SBA Sandblasted aluminum

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver ETR-LED24WPI

12V DC/24W class 2 LED driver

Power supplies: hard-wired

BTO6DIM-IC 6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM

48W dimmable LED hardwire driver

Accessories

4000-E24 24" extension cord


4000-E60 60" extension cord


4000HRNS-24 24" interconnection harness

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

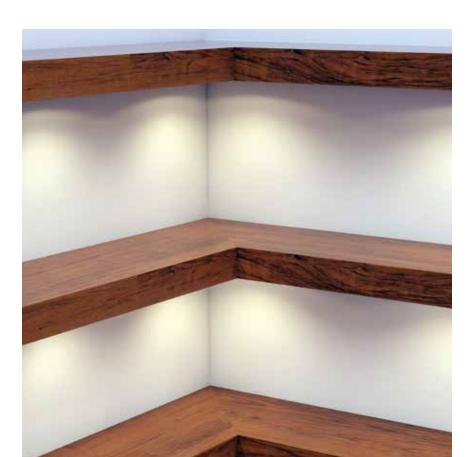



Eco-puck



The sleekness of this LED puck design makes it the right choice for cabinet and kitchen lighting applications. It can be dimmed to provide just the right ambience in your decor.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDRDP18	Ø2.75″	1.4 W	100 lm	130 lm	80	3000 K	12 V

12V DC LED driver required Over 50,000 hours of service life 12" input lead with quick connector 24" interconnection harness included Warm white light output Recessed or surface mounted installation Surface adapter included Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Frosted lens Refer to website for dimmer compatibility 5-year warranty

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Power supplies: plug-in

ETR-LED10WPI 12V DC/10W class 2 LED driver

ETR-LED24WPI 12V DC/24W class 2 LED driver

Power supplies: hard-wired BT06DIM-IC

6W dimmable LED hardwire driver

BT12DIM-IC 12W dimmable LED hardwire driver

BT24DIM-IC 24W dimmable LED hardwire driver

BT36DIM 36W dimmable LED hardwire driver

BT48DIM

48W dimmable LED hardwire driver


Finish 🔿 WH White

Accessories 4000-E24 24" extension cord

4000-E60 60" extension cord

4000HRNS-24

24" interconnection harness





LED dimmable drivers

Dimming is made easy with our LED Dimmable Driver series. These products will allow you to find just the right amount of light based on the time of day your lighting fixtures are being used.





Model

RATEC

BTO6DIM-IC 6 W dimmable LED hardwire driver IC

BT12DIM-IC 12 W dimmable LED hardwire driver IC

BT24DIM-IC

24 W dimmable LED hardwire driver

BT36DIM 36 W dimmable LED hardwire driver

BT48DIM


48W dimmable LED hardwire driver


Specifications

Constant voltage mode power supply AC-dimming supply (with TRIAC or ELV dimmer) Protection: short circuit / Over voltage Integrated junction box for hard-wire installation Fully isolated metal case -Cooling by air convection ETL certification Optimal dimming when used at 50% or more of total load Input voltage: 100VAC-230VAC, 50/60Hz Output voltage: 12V DC Load Range: 50% to 100% Operating temperature: -30°C to 45°C 5-year warranty


Finish

WH White

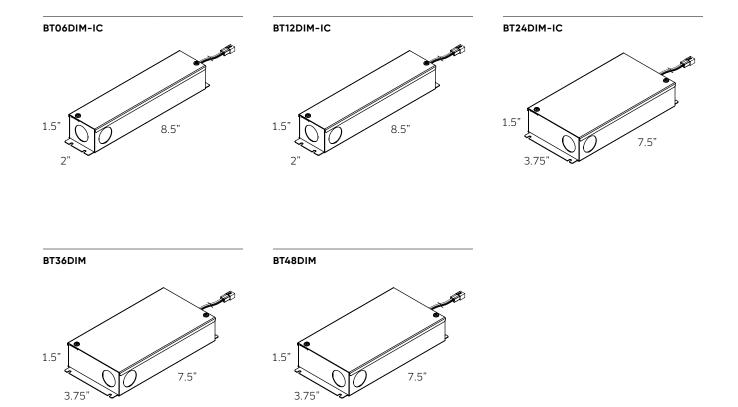

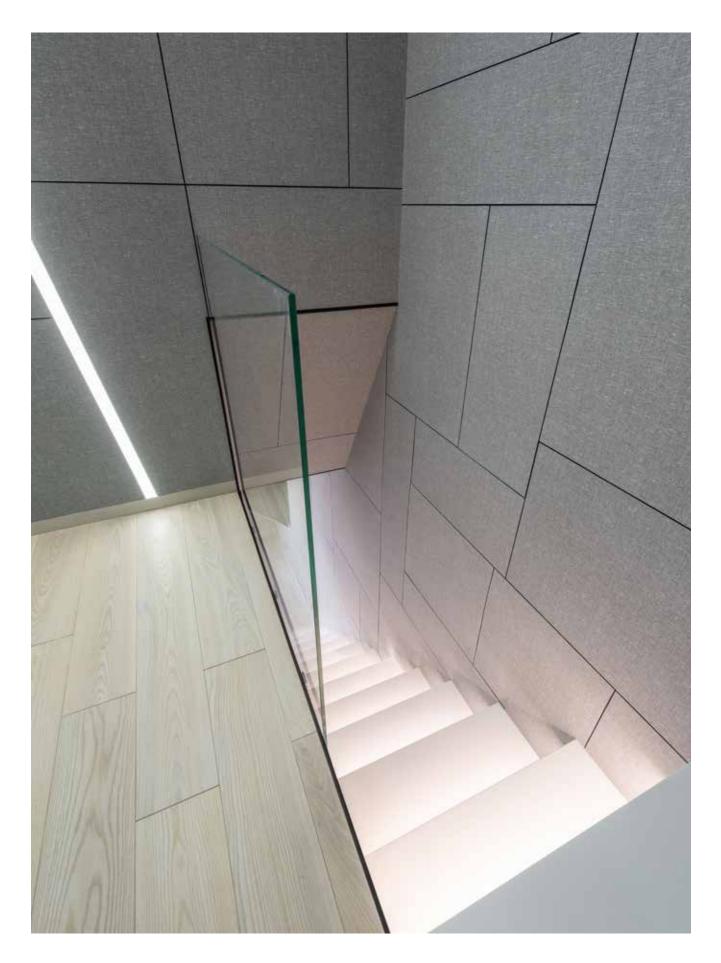

POWERLED LINEAR / P. 88

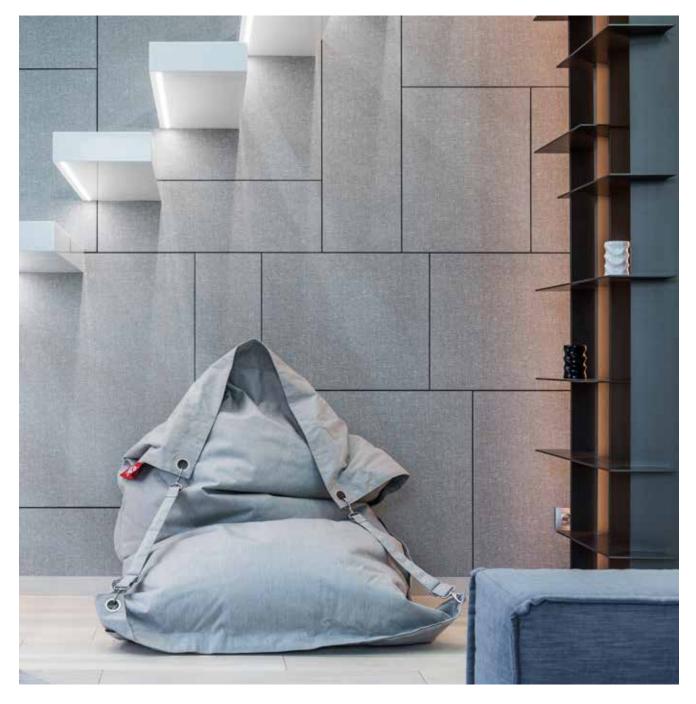

Accessories

12V GENERAL ACCESSORIES							
Title		Model	Finish	Specification			
LED Extension Accessory Ø		4000-E24	Black	 • 24" extension cord for 12 V LED products • Quick-connect installation 			
LED Extension Accessory	€ 60" •	4000-E60	Black	 60" extension cord for 12 V LED products Quick-connect installation 			
LED Harness Accessory	* 24" 3 "	4000HRNS-24	Black	 24" interconnection harness for 12 V LED products Quick-connect installation 			
LED Harness Accessory	24"	LEDHRNS-6	Black	 • 24" 6 direction interconnection harness for 12 V LED products • Quick-connect installation 			
LED Product Accessory		LEDACC-SCTE-REC	Black	 10" connection cord for 12 V LED products One end with screw terminal and one end with DALS receptacle Quick-connect installation 			
LED Product Accessory	■ ■ 10" ■ ■ ■	LEDACC-SCTE-PLUG	Black	 10" connection cord for 12 V LED products One end with screw terminal and one end with DALS plug Quick-connect installation 			

		LINU ACCESSORIES
Model		Specification
LINU-EXT24	0	 24in. extension cord for LINU series Quick-connect installation
LINU-EXT108	8	 108in. extension cord for LINU series Quick-connect installation
LINU12-ACC-CROSS	and and	X connector for LINU series Quick-connect installation
LINU12-ACC-L-LEFT	Contraction of the second seco	Left L connector for LINU series Quick-connect installation
LINU12-ACC-L-RIGHT	No. of Street,	Right L connector for LINU series Quick-connect installation
LINU12-ACC-T-LEFT	Con 100	Left T connector for LINU series Quick-connect installation
LINU12-ACC-T-MIDDLE		T connector for LINU series Quick-connect installation
LINU12-ACC-T-RIGHT	Con Con Con	Right T connector for LINU series Quick-connect installation

Accessories

DUO-PUCK ACCESSORIES							
Model		Compatibility	Finish	Specification			
4005HP-SURF-BK 4005HP-SURF-SN 4005HP-SURF-WH	Ø2.9375" 0.75"	4005FR K4005FR 4005HP	Black Satin Nickel White	 Surface adapter for 4005FR/ 4005HP series Mounts very easily using a spring mechanism 			

120V POWERLED PUCK ACCESSORIES						
Model		Compatibility	Finish	Specification		
6000-JB	335 a 5 cm 12" 12" 12"	6001	White	 Hardwire junction box for PowerLed pucks and linears series Quick-connect installation Allows hard-wired 120V setup 		
6001-PC	₽−− − 72" →	6001	White	 72" power cord for PowerLed pucks On/off switch on cord Quick-connect installation Plug-in version 		
6001-E24		6001	White	 24" extension cord for PowerLed pucks series One end with male connector and one end with female connector Quick-connect installation 		
6001-E60		6001	White	 60" extension cord for PowerLed pucks series One end with male connector and one end with female connector Quick-connect installation 		

120V LINEAR ACCESSORIES

Model			Compatibility	Finish	Specification
000-JB			6009CC	White	Hardwire junction box for PowerLED
∧.			6012CC		pucks and linears series
8	3.35' (8.5 cm)		6024CC		Quick-connect installation
RY			6036CC		 Allows hard-wired 120V setup
			6048CC		
000-ACCPC			6009CC	White	• 72" power cord for PowerLED linear serie
A .			6012CC	VVIIIco	On/off switch on cord
8			6024CC		Quick-connect installation
DRY	◀───────────────────────────────────	•	6036CC		Plug-in version
			6048CC		
000-ACCE06			6009CC	White	• 6" extension cord for PowerLED linear series
<i>x</i>			6012CC		One end with male connector and one
DRY	6"	→	6024CC		end with female connector
			6036CC 6048CC		Quick-connect installation
000-ACCE24			6009CC	White	 24" extension cord for PowerLED linear series
8			6012CC		One end with male connector and
DRY	24"	▶	6024CC 6036CC		one end with female connector
			6048CC		Quick-connect installation
000-ACCE60			6009CC	White	• 60" extension cord for PowerLED
Δ		=	6012CC		linear series
O DRY			6024CC		 One end with male connector and one end with female connector
	◄ 60" ──	-	6036CC		Quick-connect installation
			6048CC		· Quick-connect installation
000-ACCLR			6009CC	White	• Kit of left and right L connectors
<i>x</i>	1.425' 1.35' 1.35' (3.6 cm) (3.4 cm) (3.4 cm)	1.425" (3.6 cm)	6012CC		
DRY			6024CC		
	(254 cm)	(2.54 cm)	6036CC 6048CC		
			0046CC		
000-ACCE24		9009CC	HLF09	White	• 24" extension cord for 9000 and
\sim		9012CC	HLF12		HLF linear series
0		9018CC	HLF18		• One end with male connector
JRT .	← 24" →	9024CC	HLF24		and one end with female connector
		9030CC	HLF30		 Quick-connect installation
000-ACCE72		9009CC	HLF09	White	• 72" extension cord for 9000 and
\mathbf{v}		9012CC	HLF12		HLF linear series
		9018CC	HLF18		• One end with male connector
	← 72" ──►	9024CC	HLF24		and one end with female connector
		9030CC	HLF30		 Quick-connect installation

Accessories

COB-TAPE ACCESSORIES							
		Model	Finish	Specifications			
Extrusions		COBTP-ALXT-BK COBTP-ALXT-WH	Black White	 1 meter black aluminum extrusion with black lens 1 meter white aluminum extrusion with white lens 			
Extrusions DRY	00	COBTP-ALXT-L5M-BK COBTP-ALXT-L5M-WH	Black White	 5 meter roll of black aluminum extrusion with black lens 5 meter roll of white aluminum extrusion with white lens 			
COB-tape Extension Cord	*	COBTP-CC06	White	• 6 in. connection cord for hard-wired driver installation for COB tape			
COB-tape Extension Cord	4	COBTP-EXT02	White	• 2 in. extension cord with reconnect connectors for COB tape			
COB-tape Extension Cord	4 J	COBTP-EXT24	White	• 24 in. extension cord with reconnect connectors for COB tape			
COB-tape Extension Cord	9	COBTB-EXT60	White	• 60 in. extension cord with reconnect connectors for COB tape			

SWIVLED ACCESSORIES

	Model	Finish	Specifications
SwivLED Extension Cord	SWIVLED-EXT10	White	 10" extension cord for SwivLED series One end with male connector and one end with female connector Can be connected together Quick-connect installation
wivLED Extension Cord	SWIVLED-EXT36	White	 36" extension cord for SwivLED series strips One end with male connector and one end with female connector Can be connected together Quick-connect installation
GwivLED Extension Cord	SWIVLED-EXT60	White	 60" extension cord for SwivLED series strips One end with male connector and one end with female connector Can be connected together Quick-connect installation
wivLED Mounting rackets	SWIVLEDACC- 45VCLIP	Chrome	• 45 Degree Brackets for SwivLED Series
wivLED connection ccessory	SWIVLED-CC10- OUTPUT	White	 10" extension cord for SwivLED series One end with male connector and one end with female connector Can be connected together Quick-connect installation

ELECTRONIC LOW-VOLTAGE TRANSFORMERS

Model	Specifications
ETR-LED10WP1	• On/off switch on cord
Electronic	• 48" (1.22 m) cord with practical "click-in" connector
Low-Voltage	compatible with the complete LED low-voltage system
Transformer	• 120V AC to 12V DC LED plug-in driver
•	• Class 2
Ø m	• Maximum: 12W
	• Efficiency level VI compliant
ETR-LED24WP1	• On/off switch on cord
_	• 48" (1.22 m) cord with practical "click-in" connector
Electronic 3.62	25" compatible with the complete LED low-voltage system
Low-Voltage	120V AC to 12V DC LED plug-in driver
Transformer	• Class 2
Λ.	



- Maximum: 24W
- Efficiency level VI compliant









STELLAR

180 MISTY

182

AURORA





BLOOM



186



188 DELTA



DELTA SQUARE

DELTA SMART



298

ARCHITECT WALL



PROFILE



200 PINPOINT WALL MSLWALL-CC

ADEN



BROOKLYN LEDWALL-B





GEMINI

SWS48-CC

EDINBURGH



GENEVA LEDWALL-G-CC



HARLOW





DURBAN

LEDWALL-D

RONDO



MARQUEE LEDSTEP001D



LEDSTEP002D



PEARL




226 CAMBER



228

222



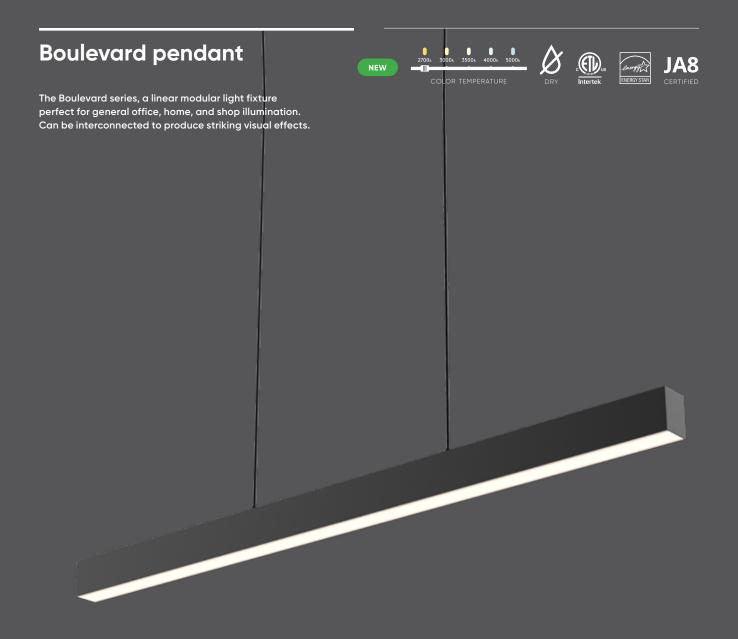

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LNPD48-CC	48"	40 W	2805 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
LNPD48-CC-V	48"	40 W	2805 lm			120, 277, 347 V

Specifications

Switch-selectable CCT:2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K Unique 20% up/ 80% down light output

120VAC / 60Hz input

Over 50,000 hours of service life Adjustable height up to 10 feet

Aluminum housing which serves as a

highly efficient heat sink

Multiple fixtures can be

connected together

Integrated dimmable driver

Canopy mount on 4" octagonal junction box

Dimming ranges from 10% to 100%.

Refer to website for dimmer compatibility

5-year warranty

Finish

BK Black

Accessories


LNACC-L16FT

16-foot lens for Boulevard series pendants and recessed linears

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LNPD48-CC / LNPD48-CC-V

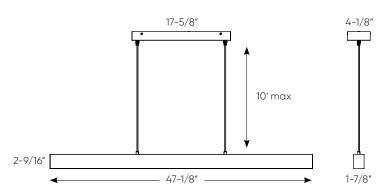





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
MSLPD48-CC	48"	40 W	2710 lm	90	2700, 3000, 3500,	120 V
					4000, 5000 K	

Specifications

Over 50,000 hours of service life Adjustable height up to 6 feet Aluminum housing which serves as a highly efficient heat sink Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K 30° beam angle Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagon junction box Refer to website for dimmer compatibility 5-year warranty

Finish

BK Black

Accessories

MSLPD-ACC-I

Bracket for connecting two MSLPD48 fixtures in an "I" pattern

MSLPD-ACC-L

Bracket for connecting two MSLPD48 fixtures in an "L" pattern

MSLPD-ACC-T

Bracket for connecting three MSLPD48 fixtures in a "T" pattern


MSLPD-ACC-X

Bracket for connecting four MSLPD48 fixtures in an "X" pattern

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

MSLPD48-CC

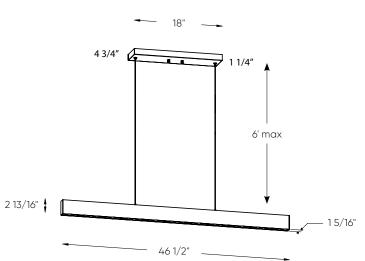

Beam

This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.





Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SPD48-3K	48"	32 W	1810 lm	2800 lm	90	3000 K	120, 277 V
SPD72-3K	72"	55 W	2800 lm	4500 lm	90	3000 K	120, 277 V

Specifications

Over 50,000 hours of service life Adjustable cable length up to 10 feet Warm white light output Frosted lens Aluminum die-cast housing which serves as a highly efficient heat sink Superior color consistency Integrated dimmable driver Compatible with TRIAC, ELV and 0-10 V dimmers Suitable for dry locations Refer to website for dimmer compatibility 5-year warranty


Finish

BK Black**WH** White


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.


SPD48-3K




SPD72-3K





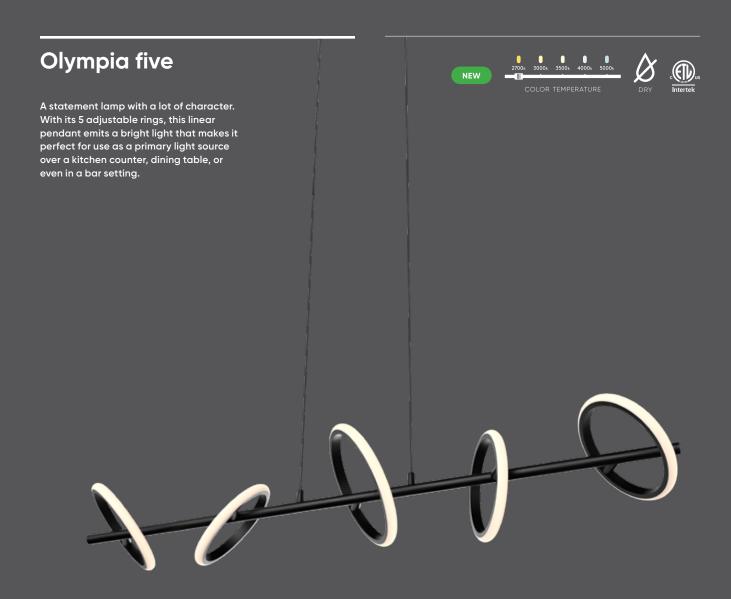

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RRPD5-CC	42"	30 W	1530 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish		Note	
Over 50,000 hours of service life Adjustable height up to 6 feet Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Integrated dimmable driver			BK Black			
Suitable for dry Canopy mount		٦				

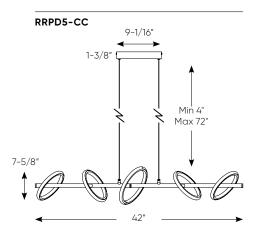

Refer to website for dimmer compatibility

junction box

5-year warranty





Olympia two

This 2-ring pendant can be personalized by adjusting the position of each ring, the perfect way for those of us who appreciate simplicity to add our touch to a space. All that's left to do is decide which bar, kitchen island, bedside table it will go best with.










Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
RRPD2-CC	14"	12 W	750 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish		Note	
Over 50,000 hours of service life Adjustable height up to 6 feet Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagon junction box			BK Black		may require MOQ's o	nishes available, but and longer lead times. DALS representative

RRPD2-CC

5-year warranty

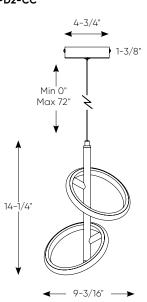

Refer to website for dimmer compatibility



Helix

NEW





A classic shape with a contemporary design. Helix is perfect for adding stature and prestige to any space. Its gentle spirals instantly enhance areas of the bedroom, kitchen islands, offices, and reading nooks.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SPR20-CC	20"	30 W	1060 lm	80	2700, 3000, 3500,	120 V
SPR34-CC	34"	60 W	2370 lm		4000, 5000 K	

Specifications
Over 50,000 hours of service life
Adjustable height up to 10 feet
Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K
Frosted lens

Integrated dimmable driver Suitable for damp locations

Canopy mount on 4" octagonal junction box

Refer to website for dimmer compatibility


5-year warranty




BK Black

Note


Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

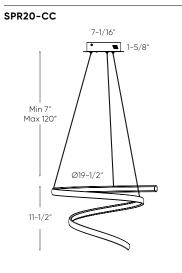

SPR34-CC





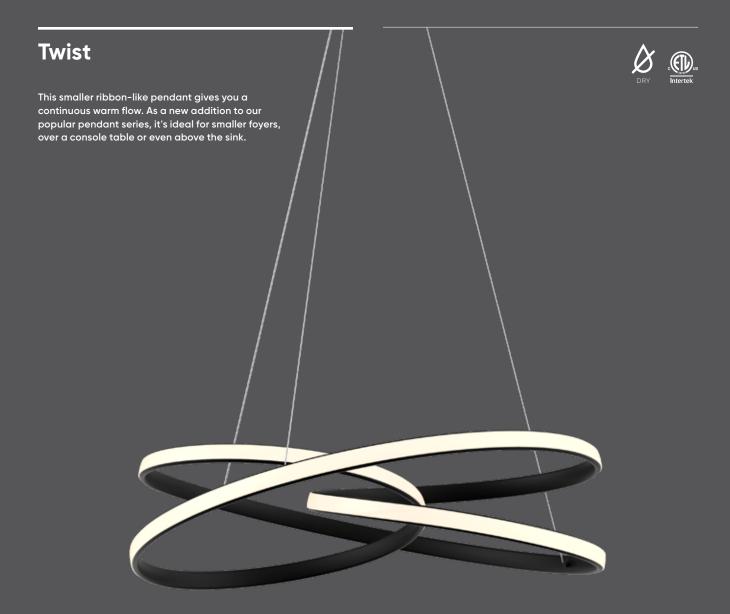

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TWPS	20.5"	30 W	1800 lm	85	3000 K	120 V

Specifications

Finish

Over 50,000 hours of service life Adjustable height up to 10 feet Frosted lens Integrated dimmable driver

Suitable for dry locations

Canopy mount on 4" octagon junction box

Refer to website for dimmer compatibility


5-year warranty

BK Black


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

TWPS

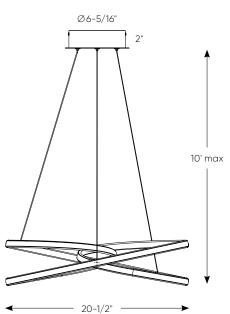



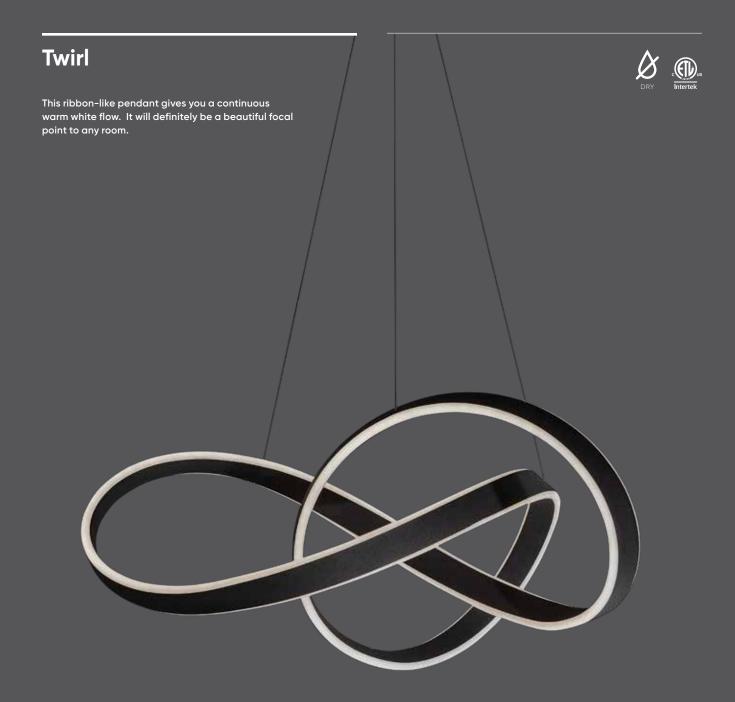


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
TWPD	28"	80 W	3960 lm	80	3000 K	120 V

Specifications	Finish	Note
Over 50,000 hours of service life	BK Black	Other color ^o T and finishes available, but may require MOQ's and longer lead times.
Adjustable height up to 4 feet Aluminum housing which serves	U WH White	Please contact your DALS representative for more information.
as a highly efficient heat sink Frosted lens		for mole mormation.
Integrated dimmable driver		
Suitable for dry locations		
Canopy mount on 4" octagon junction box		
Refer to website for dimmer compatibility		

5-year warranty

TWPD

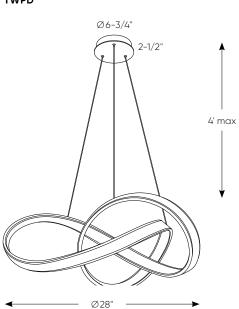



Atom pendant

A unique design with clean lines that will add the final touch to your office, bedroom and even that newly renovated mud room. The double-sided ring will add warmth and character.










Model S	Size	Watts	Delivered lumens	CRI	Color °T	Voltage	
FPD-CC 10	6"	23 W	820 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V	
Specifications		Finish		N	lote		
Over 50,000 hours of service life		BK Bl	BK Black		Other color °T and finishes available, but		
Adjustable height up to 10 feet		🛑 GD Go	Gold		may require MOQ's and longer lead times Please contact your DALS representative for more information.		
Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K		Ŭ					
Frosted lens							

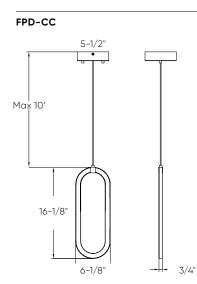

Integrated dimmable driver Suitable for damp locations Canopy mount on 4" octagonal

Refer to website for dimmer compatibility

junction box

5-year warranty










Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage	
PDR14-CC	14"	25 W	1700 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V	
Specifications		Finish			Note		
Over 50,000 hours of service life Adjustable height up to 4 feet Aluminum housing which serves as a highly efficient heat sink Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K		BG Black, gold			Other color °T and finishes available, but may require MOQ's and longer lead times Please contact your DALS representative for more information.		
Frosted lens Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagonal junction box Refer to website for dimmer compatibility		/					

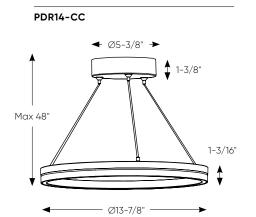

5-year warranty





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
STRPD	30"	33 W	1880 lm	90	3000 K	120 V

Over 50,000 hours of service life Adjustable height up to 4 feet Aluminum housing which serves as a highly efficient heat sink Includes 6 robust stems (8" each) Frosted lens Excellent color rendering Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagon junction box Refer to website for dimmer compatibility


5-year warranty

Finish

BK BlackWH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

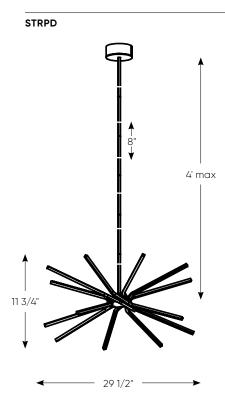




Stellar floor lamp

Just like the trident, this powerful, yet discrete floor lamp will add character to any living area.



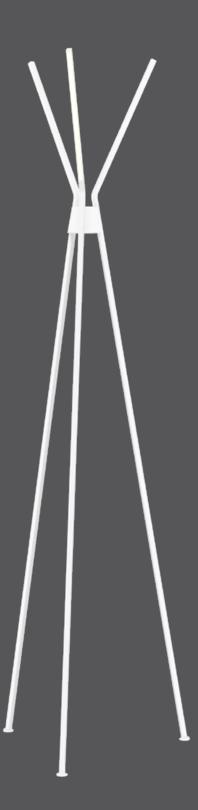

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
STRFL	21.5"	14 W	1200 lm	90	3000 K	120 V


Over 50,000 hours of service life Aluminum housing which serves as a highly efficient heat sink Warm white light output Frosted lens Excellent color rendering Integrated dimmable driver Suitable for dry locations Refer to website for dimmer compatibility 5-year warranty

Finish



Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

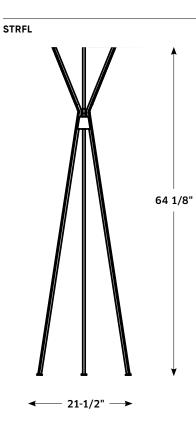





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDR5	25"	50 W	2400 lm	80	3000 K	120 V

Specifications	
----------------	--

Finish


Over 50,000 hours of service life Adjustable height up to 4 feet Aluminum housing which serves as a highly efficient heat sink Frosted lens Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagon junction box Refer to website for dimmer compatibility

5-year warranty

BK BlackWH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

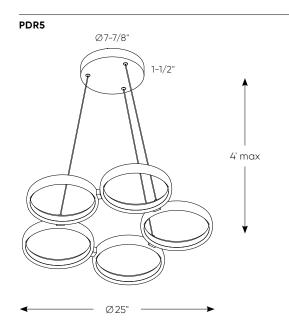



Linea pendant

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design, whether in a cluster or standalone. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDLED120-24	24"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-36	36"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-48	48"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-60	60"	30 W	300 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V

Over 50,000 hours of service life Adjustable cable length to 10 feet Switch-selectable CCT: 3000 K/ 3500 K/4000 K inside canopy Frosted reflector Low power consumption Superior color consistency Canopy mount on 4" octagon junction box

Integrated dimmable driver

Compatible with TRIAC, ELV and 0-10 V dimmers Suitable for damp locations


Refer to website for dimmer compatibility 5-year warranty


Finish




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.





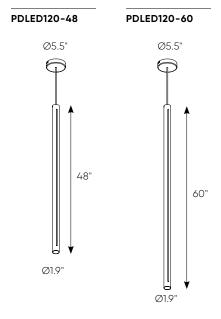



Linea cluster

These beautiful modern pendants with vertical light strips running along the side create tasteful accents to any interior design. Height adjustable 10-foot cables and flexible switch-selectable color temperatures make these decorative pendants an easy choice. Available in multiple sizes and finishes.







Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDLED120-5	Ø22"/5 lights	150 W	1500 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-8	Ø26"/8 lights	240 W	2400 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-5SQ	47"/5 lights	150 W	1500 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V
PDLED120-8SQ	84"/8 lights	240 W	2400 lm	90	3000 K - 3500 K - 4000 K	120 V - 277 V

Over 50,000 hours of service life Individually adjustable cable length up to 10 feet Switch-selectable CCT: 3000 K/

3500 K/4000 K inside canopy Frosted reflector

Low power consumption

Superior color consistency

Canopy mount on 4" octagon junction box

Integrated dimmable driver

Compatible with TRIAC, ELV and

0-10 V dimmers

Suitable for damp locations

Refer to website for dimmer compatibility


5-year warranty





Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

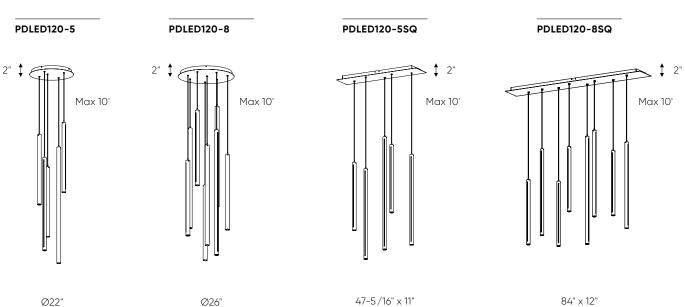

84" x 12"

Nova

Designed for modern and new builds, this cylindrical hanging pendant provides a simple and elegant way to enhance your space. At 18-inches in length, and with an ultra-thin flat canopy with adjustable 10-foot cable, this fixture can be installed as easily as any recessed light. Switch-selectable color temperatures ranging from 3000, 3500, and 4000 K, to create a subtle and customizable lighting effect.







Energy STAR

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
PDC18-CC	18"	9 W	510 lm	600 lm	90	3000 K - 3500 K - 4000 K	120 V

Over 50,000 hours of service life Adjustable cable length up to 10 feet Every fixture includes a junction box with integrated dimmable driver Ultra-slim canopy, installs like a recessed fixture Frosted reflector Low power consumption Superior color consistency Switch-selectable CCT: 3000 K/ 3500 K/4000 K on junction box Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty

Finish

BK Black
 SBA Sandblasted aluminum
 WH White


Accessories

RFP-UNI Universal rough-in plate

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.








Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
PDL44	44"	40 W	2200 lm	80	3000 K	120 V

Specifications	Finish	Note
Over 50,000 hours of service life Adjustable height up to 4 feet Aluminum housing which serves as a highly efficient heat sink Frosted lens Integrated dimmable driver Suitable for dry locations Canopy mount on 4" octagon junction box	 BK Black WH White 	Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Refer to website for dimmer compatibility

5-year warranty

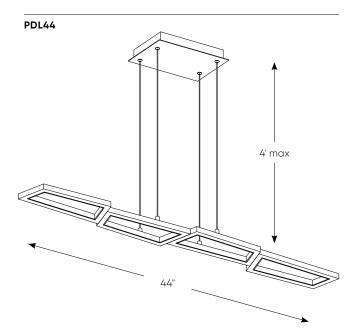




Borealis






This sconce exhibits a graceful, ribbon-like style with light being diffused from both ends. This beautifully crafted wall fixture can be mounted in many different locations: the bathroom, the study, or on either side of your fireplace. The choice is yours.

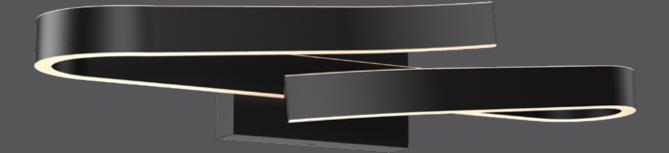

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage		
VRB24-CC	24"	40 W	1400 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V		
					4000, 3000 K			
Specifications		Fini	sh		Note			
Over 50,000 hours of service life		\bullet	BK Black		Other color °T and finishes available, b			
Superior color cor	nsistency		SN Satin Nicke		2	and longer lead times		
Integrated dimmo	able driver				Please contact your DALS representativ for more information.			
Switch-selectable 3000 K/3500 K/4	e CCT: 2700 K/ 000 K/5000 K in canc	ру				1.		
Minimal heat emis	sion							
Aluminum constru	ction							
Suitable for damp	locations							
Refer to website f	or dimmer compatibil	ty						
-								


5-year warranty

VRB24-CC












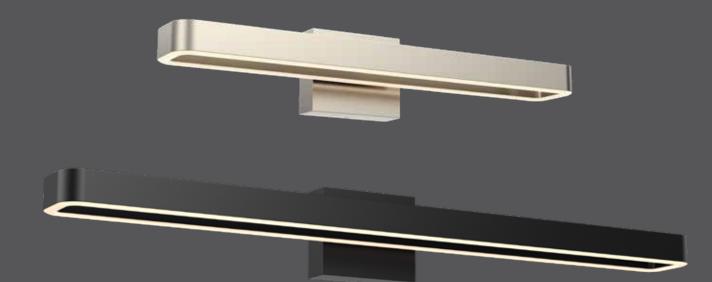



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
VSW24-CC	24"	40 W	1280 lm	90	2700, 3000, 3500,	120 V
VSW36-CC*	36"	40 W	1500 lm	90	4000, 5000 K	120 V

Finish

Over 50,000 hours of service life Superior color consistency Integrated dimmable driver Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy Minimal heat emission Aluminum construction 120 degree swivel Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty




- BK Black
- SN Satin Nickel (VSW24-CC only)


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

VSW24-CC

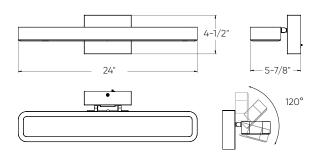

VSW36-CC

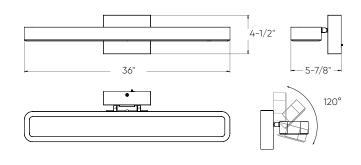



Gemini

This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.









Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SWS12-3K	12"	12 W	1080 lm	1200 lm	90	3000 K	120 V - 277 V
SWS24-3K	24"	24 W	2160 lm	2400 lm	90	3000 K	120 V - 277 V
SWS36-3K	36"	36 W	2575 lm	3600 lm	90	3000 K	120 V - 277 V


Over 50,000 hours of service life Warm white light output Low power consumption Superior color consistency Integrated dimmable driver ADA compliant Compatible with TRIAC, ELV and 0-10 V dimmers Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty


Finish



Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

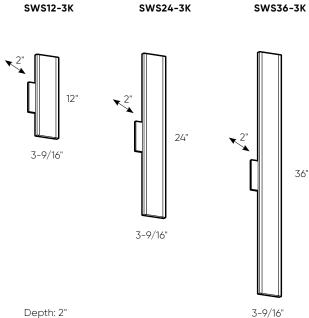




3-9/16"

36"



Aries

This unique design will provide a beautiful light pattern on your walls. From hallway to bedrooms, this sconce will blend perfectly with your decor.

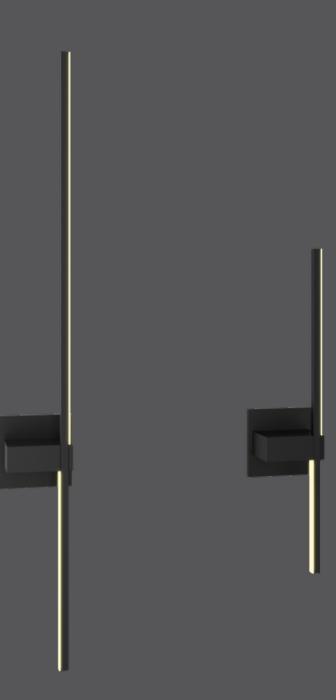

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
STK21	21"	7 W	400 lm	90	3000 K	120 V
STK37	37"	13 W	840 lm	90	3000 K	120 V

Finish

Over 50,000 hours of service life Warm white light output Low power consumption Superior color consistency Integrated dimmable driver ADA compliant Suitable for wet locations


Refer to website for dimmer compatibility

5-year warranty




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

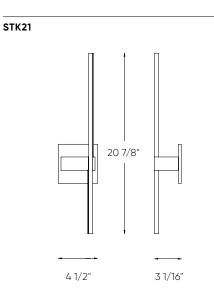

STK37

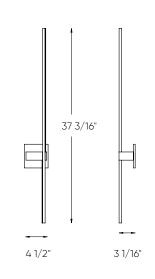

Noble one



 \bigcirc

DAMP





This LED wall mount is perfect for applications in homes and condos. It is a popluar style for bathrooms, providing just the right amount of light to enhance your decor.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDVAN001-CC-12	12"	8 W	520 lm	700 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V

Over 50,000 hours of service life Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy Squared frosted glass lens

- ADA compliant
- Low power consumption
- Superior color consistency
- Integrated dimmable direct-AC
- LED technology
- Suitable for damp locations
- Refer to website for dimmer compatibility
- 5-year warranty

Finish


- **BK** Black CH Chrome

 - SN Satin Nickel

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDVAN001-CC-12



4 1⁄4"



Noble one




 $\mathbf{0}$

DAMP





The flexibility of our LED vanity will give you many options to work with. It can be installed in a horizontal or vertical direction, and is available in 3 finishes.

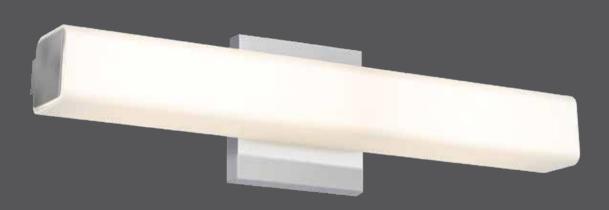

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDVAN001-CC-18	18"	16 W	1000 lm	1300 lm	80	2700, 3000, 3500,	120 V
LEDVAN001-CC-24	24"	24 W	1300 lm	2000 lm	80	4000, 5000 K	120 V

5-year warranty

Over 50,000 hours of service life Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy Square frosted glass lens

ADA compliant Superior color consistency Integrated dimmable direct-AC LED technology Suitable for damp locations

Refer to website for dimmer compatibility

Finish

BK Black
CH Chrome
SN Satin Nickel

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.




Noble two



 \bigcirc

DAMP





This LED wall mount is perfect for applications in homes and condos. It is a popular style for bathrooms, providing just the right amount of light to enhance your decor.



Model	Size	Watts	Delivered lum	ens LED lumens	CRI	Color °T	Voltage
LEDVAN002-CC-12	12"	8 W	380 lm	700 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish			Note	
Over 50,000 hours of Switch-selectable CC 3000 K/3500 K/4000 Round frosted glass & ADA compliant Low power consumpt	CT: 2700 K/) K/5000 K i ens			ck ome in Nickel		Other color °T and finisl may require MOQ's and Please contact your DA for more information.	l longer lead times.
Superior color consist Integrated dimmable	tency	LED					



technology

5-year warranty

Suitable for damp locations

Refer to website for dimmer compatibility

LEDVAN002-CC-12

4 1⁄4"

Noble two




 \bigcirc

DAMP





The flexibility of our LED vanity will give you many options to work with. It can be installed horizontally or vertically, and is available in 3 finishes.

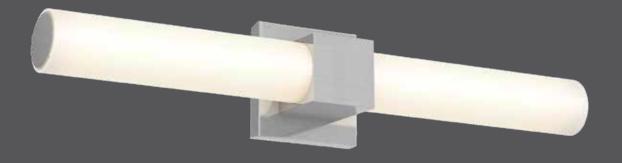

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDVAN002-CC-24	24"	24 W	1300 lm	2000 lm	80	2700, 3000, 3500,	120 V
LEDVAN002-CC-36	36"	32 W	1900 lm	2500 lm	80	4000, 5000 K	120 V

LED technology

5-year warranty

Suitable for damp locations

Over 50,000 hours of service life Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy Round frosted glass lens ADA compliant Superior color consistency Integrated dimmable direct AC

Refer to website for dimmer compatibility


Finish

BK Black
CH Chrome
SN Satin Nickel


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDVAN002-CC-24



LEDVAN002-CC-36

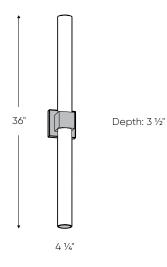




Lyra



These modern LED vanity lights can be installed in 2 directions; horizontal or vertical based on your desired lighting layout. Let your imagination go.

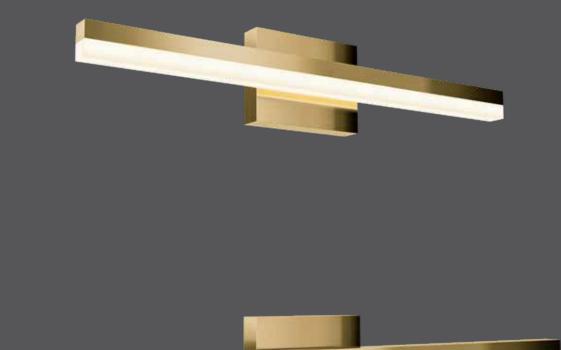

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDVAN003-CC-24	24"	22 W	1275 lm	1600 lm	90	2700, 3000, 3500,	120 V
LEDVAN003-CC-32	32"	38 W	2250 lm	4000 lm	90	4000, 5000 K	120 V

Over 50,000 hours of service life Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy ADA compliant Superior color consistency Integrated dimmable driver Suitable for damp locations Refer to website for dimmer compatibility 5-year warranty


Finish

BB Brushed Brass
BK Black
CH Chrome
SN Satin Nickel


Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDVAN003-CC-24"



LEDVAN003-CC-32"






Atom





A unique design with clean lines that will add the final touch to your office, bedroom and even that newly renovated mud room. The double-sided rings will add warmth and character.

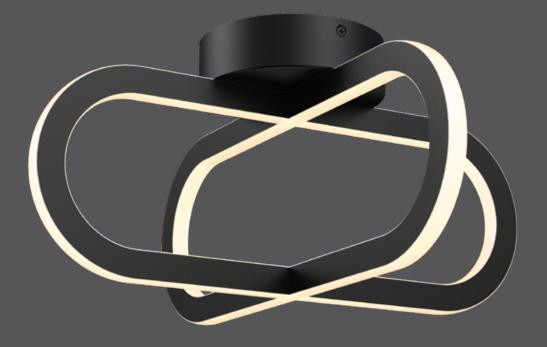


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FDB-CC	16"	40 W	1350 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish		Note	
Over 50,000 hours of service life Integrated driver		BB Brushed Brass		Other color °T and finishes available,		
			BK Black		but may require MOQ's and longe	
Excellent color	rendering		SN Satin Nicke		lead times. Please contact you representative for more informe	,
Minimal heat e	mission					ore information.
Die-cast alumi	inum housing					
Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K		К/3000 К/				
Canopy mount junction box	t on 4" octagor	nal				
Suitable for da	Imp locations					
Easy installatio	on					

Refer to website for dimmer compatibility

5-year warranty

FDB-CC

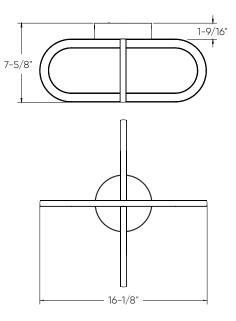

Newton




A classic yet modern style, this unique flush mount will definitely impress. Not only will it light up the room from its central light source but will also emit a soft glow from its illuminated outer rings.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FMT18-CC	18"	25 W	1300 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications		Finish			Note	
Over 50,000 hours of serv	vice life	BK	Black		Other color °T and finish	
Integrated driver Minimal heat emission					but may require MOQ's lead times. Please cont	Ų
Die-cast aluminum housir	a				representative for more	-
Switch-selectable CCT: 27 3500 K/4000 K/5000 K	-					
Canopy mount on 4" octa junction box	agonal					
Adjustable mounting posi	ition					
Suitable for damp locatio	ons					
Easy installation						
Refer to website for dimm	er compatibility					



5-year warranty

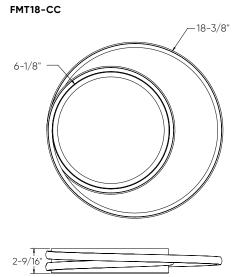




Stellar flush mount

For walls or ceilings this fun design will definitely have people talking. Our Stellar flush mount will add a warm sophisticated glow to your project.



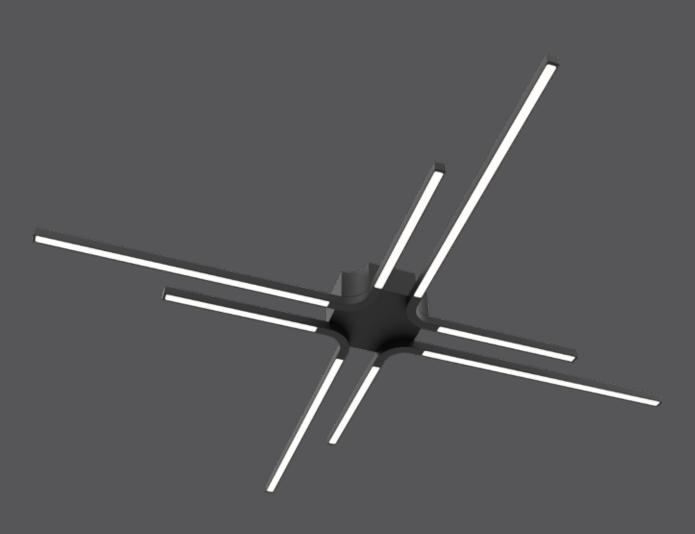



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
STRFM	32"	40 W	2000 lm	90	3000 K	120 V

Specifications	Finish	Note
Over 50,000 hours of service life	BK Black	Other color °T and finishes available, but
Aluminum housing which serves as a highly efficient heat sink	WH White	may require MOQ's and longer lead times. Please contact your DALS representative
Frosted lens		for more information.
Integrated dimmable driver		
Suitable for dry locations		
Canopy mount on 4" octagon junction box		
Refer to website for dimmer compatibility		

5-year warranty

STRFM

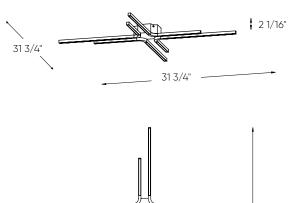




2 1/16"



Misty



This new flush mount offers clean lines and a wonderful semi-opaque diffuser that adds flair without being the center of attention. It will definitely blend into any project you may have.

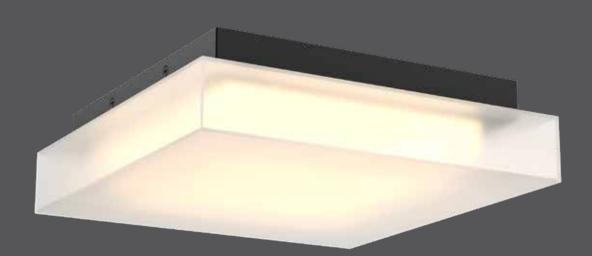



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
FUZ11-CC	11"	15 W	1000 lm	80	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications		Finish			Note	


BK Black

Over 50,000 hours of service life Integrated driver Minimal heat emission Die-cast aluminum housing Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Canopy mount on 4" octagonal junction box Suitable for dry locations Easy installation Refer to website for dimmer compatibility 5-year warranty Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

FUZ11-CC





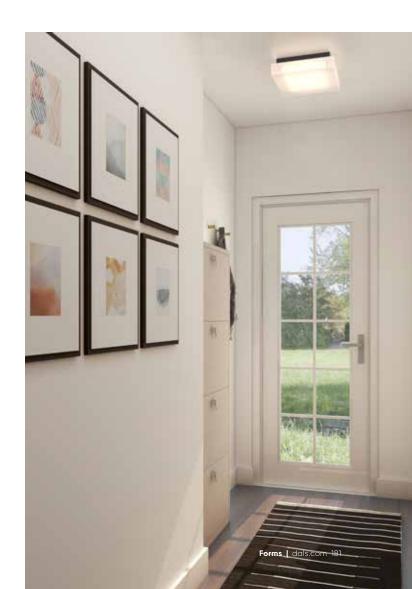

Aurora



We have succeeded in creating a very unique solution with our LED flush mounts. They project a tremendous amount of light, and can also be dimmed to provide a back-lit halo that will gently illuminate your way during the night hours.






Model Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFH12-3K 12"	26 W	1850 lm	2300 lm	90	3000 K	120 V
Specifications		Finish		Note		
Over 50,000 hours of serv Integrated driver Warm white light Excellent color rendering Superior LED performance Minimal heat emission Frosted lens Edge-lit technology Die-cast aluminum housir General lighting zone turns lower dimming range, back Canopy mount on 4" octa junction box Suitable for dry locations Refer to website for dimm 5-year warranty	e and lifespan ng off in the clighting stays on gon	 SN Satin Nicket WH White 	51	may Plea	er color °T and finisl require MOQ's and se contact your DA tore information.	l longer lead times.



CFH12-3K



Ø12"

Bloom









Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFR12-3K	12"	26 W	1570 lm	2300 lm	90	3000 K	120 V

Over 50,000 hours of service life Integrated driver Warm white light Excellent color rendering Superior LED performance and lifespan Minimal heat emission Frosted lens Edge-lit technology Die-cast aluminum housing General lighting zone turns off in the lower dimming range, back lighting stays on Canopy mount on 4" octagon junction box Suitable for dry locations Refer to website for dimmer compatibility

5-year warranty

CFR12-3K



Finish

- SN Satin Nickel
- WH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.







Ora







A beautiful round glass flush mount that offers more than the eye can see. With five color temperatures to choose from, this is as versatile as can be. From hallways to bedrooms and bathrooms to basements. It will add flair to any room.



Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFG13-CC	13"	32 W	1800 lm	2500 lm	90	2700, 3000, 3500,	120 V
						4000, 5000 K	

Specifications
Over 50,000 hours of service life
Integrated driver
Excellent color rendering
Minimal heat emission
Frosted glass lens
Die-cast aluminum housing
Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K
Canopy mount on 4" octagonal junction box
Suitable for damp locations
Easy installation
Refer to website for dimmer compatibility
5-year warranty

Finish


SN Satin Nickel

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.









Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFLEDR06-CC	6"	11 W	700 lm	750 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
CFLEDR10-CC	10"	17 W	1000 lm	1200 lm		4000, 3000 K	
CFLEDR14-CC	14"	26 W	1600 lm	2100 lm			
CFLEDR18-CC	18"	30 W	2100 lm	2500 lm			

Integrated dimmable driver Over 50,000 hours of service life Switch-selectable CCT: 2700 K/ 3000 K/3500 K/4000 K/5000 K in canopy Smooth 360° wide spread

Minimal heat emission

Frosted lens

Edge-lit technology

Cast aluminum construction

Suitable for outdoor locations

on covered ceilings only Refer to website for dimmer compatibility

Ideal operating temperature:

-20° to 40° C

5-year warranty


Finish

- **BB** Brushed Brass (CFLEDR06/10/14)
- **BK** Black
 - SN Satin Nickel
- WH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



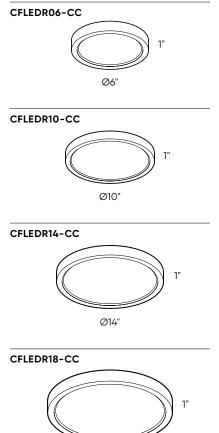


Ø18"

Delta square

Our LED flush mounts incorporate Edge-Lit technology, eliminating hot spots or glare. With 3 sizes to choose from, every application is covered.



COLOR TEMPERATURE

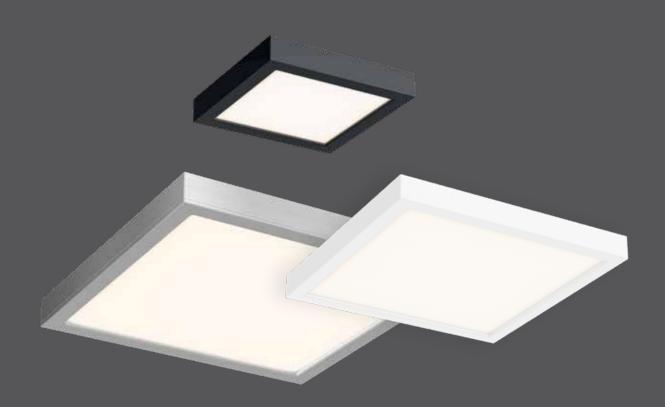

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
CFLEDSQ06-CC	6"	11 W	700 lm	750 lm	90	2700, 3000, 3500,	120 V
CFLEDSQ10-CC	10"	17 W	1000 lm	1200 lm		4000, 5000 K	
CFLEDSQ14-CC	14"	26 W	1600 lm	2100 lm			

Frosted lens Edge-lit technology Cast aluminum construction Suitable for outdoor locations on covered ceilings only

-20° to 40° C 5-year warranty

Integrated dimmable driver

Smooth 360° wide spread Minimal heat emission

Over 50,000 hours of service life

Switch-selectable CCT: 2700 K/

Refer to website for dimmer compatibility

Ideal operating temperature:

Finish


BK Black SN Satin Nickel WH White 3000 K/3500 K/4000 K/5000 K in canopy

Note


Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.




CFLEDSQ06-CC



CFLEDSQ10-CC



CFLEDSQ14-CC



Essential

Slim design and uniform light output are the cornerstone of our LED flush mounts. Available in two sizes, you have the flexibility to personalize any lighting project.







Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
7205	5"	6 W	350 lm	600 lm	90	3000 K	120 V
7209	9"	18 W	1260 lm	1700 lm	90	3000 K	120 V

Integrated dimmable driver Over 50,000 hours service life Warm white light Excellent color rendering Superior LED performance and lifespan Smooth 360° wide spread Minimal heat emission Frosted lens Edge-lit technology Plastic construction Mountable on a standard junction box or inside an existing recessed housing with included mounting clips, socket adapter and quick connect Suitable for dry locations


Refer to website for dimmer compatibility 5-year warranty

Finish


○ WH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



7209



Ø8 1/2"



5/8"

Gemini

The Gemini is new to our exterior collection. It is its simplicity which makes this luminaire so special an unobtrusive, yet striking design that blends in perfectly with big architectural features.











Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SWS48-CC	48"	40 W	1300 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications			Finish		Note	
Over 50,000 hou Switch-selectab 3500 K/4000 K/S Made of extrude Unique left/right Superior color co Integrated dimm ADA compliant Suitable for wet I	le CCT: 2700 5000 K d aluminum lighting outp onsistency able driver	K/3000 K/	BK Black		Other color °T and finish may require MOQ's and Please contact your DA for more information.	l longer lead times.
ldeal operating 1 -20° to 40° C	temperature:					
Refer to website	for dimmer c	compatibility				
5-year warranty						



Forms | dals.com 195








Profile





Love at first sight, guaranteed. This will not only give you up and down lighting but also central through a delicate acrylic opening. Want to adapt your lighting to your environment? No problem. This wall mount has five color temperatures to choose from which makes it ideal for city or country living.

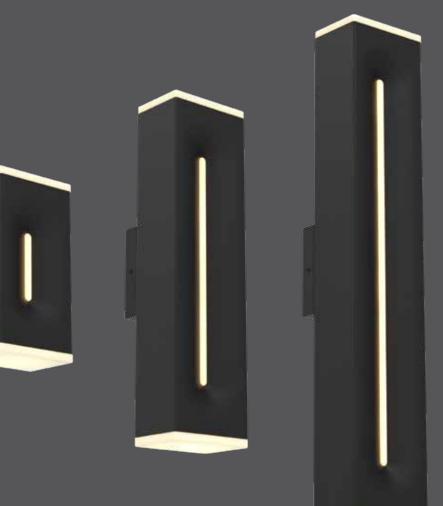

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LWJ08-CC	8"	10 W	390 lm	90	2700, 3000, 3500,	120 V
LWJ16-CC	16"	20 W	760 lm		4000, 5000 K	
LWJ24-CC	24"	45 W	2350 lm			

Made of extruded aluminum Fully sealed light engine Over 50,000 hours of service life Unique up, down, and center lighting output Low profile design Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Superior color consistency Integrated dimmable driver ADA compliant

Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty


Finish

BK Black


WH White (LWJ16-CC only)

Note


Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

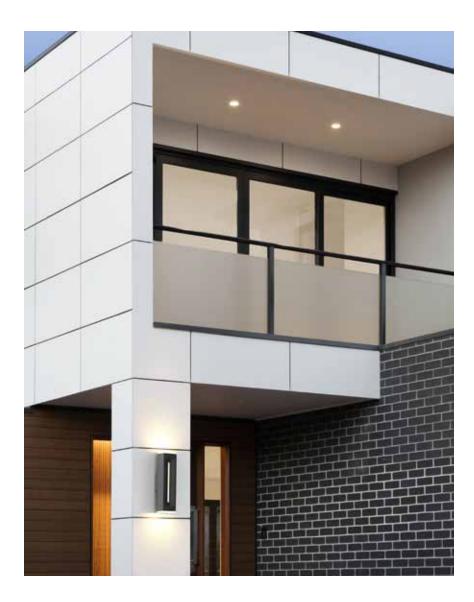


LWJ08-CC



LWJ16-CC



LWJ24-CC



Pinpoint wall










The minimalist design of this fixture will definitely add a touch of sophistication. From classic to modern exteriors to residential or commercial interiors, this sconce is a must see. With its up/down light and less than four inch profile, this is discretion at its finest without compromising on performance.

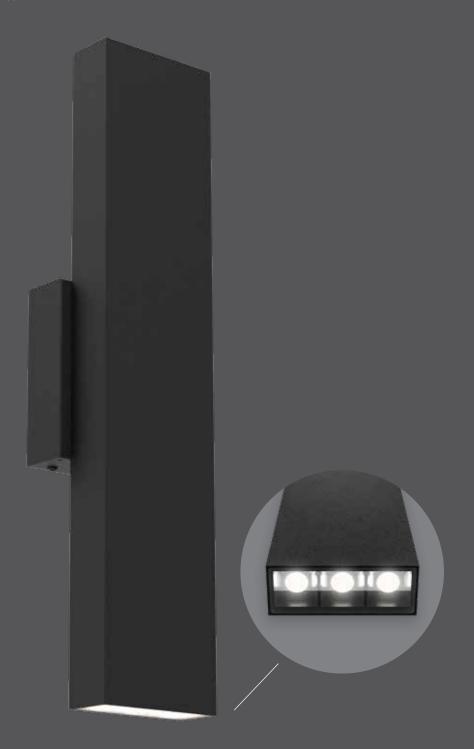

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
MSLWALL-CC	18"	15 W	760 lm	1200 lm	90	2700, 3000, 3500,	120 V
						4000, 5000 K	

Made of extruded aluminum Fully sealed light engine Over 50,000 hours of service life Unique up/down lighting output Low profile design Switch-selectable CCT: 2700 K/3000 K/ 3500 K/4000 K/5000 K Superior color consistency Integrated dimmable driver ADA compliant

Suitable for wet locations

Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



MSLWALL-CC



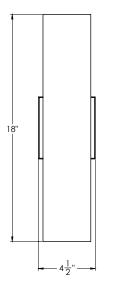

Aden





The key design element of our LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.



Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-A	29 W	2100 lm	2260 lm	90	3000 K	120 V - 277 V

Cylindrical housing made of extruded aluminum

Fixture canopy made of die-cast aluminum

LED module mounted on an aluminum heat sink to maximize heat dissipation and extend product life

Cylinder comes with 3 optical options:

- Bright aluminum reflector that provides a 45° beam spread
- Frosted glass lens to allow a wider beam spread
- Die-cast aluminum cap to allow a down light only version

Compatible with TRIAC, ELV and 0-10 V dimmers

The LED board is sealed with a clear tempered glass lens to ensure weatherproof operation

Baked powder paint coat for a highly durable finish

JA8 certified

Energy Star certified

ADA compliant

Suitable for wet locations


Refer to website for dimmer compatibility

Ideal operating temperature:

-20° to 40° C


5-year warranty

Finish




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

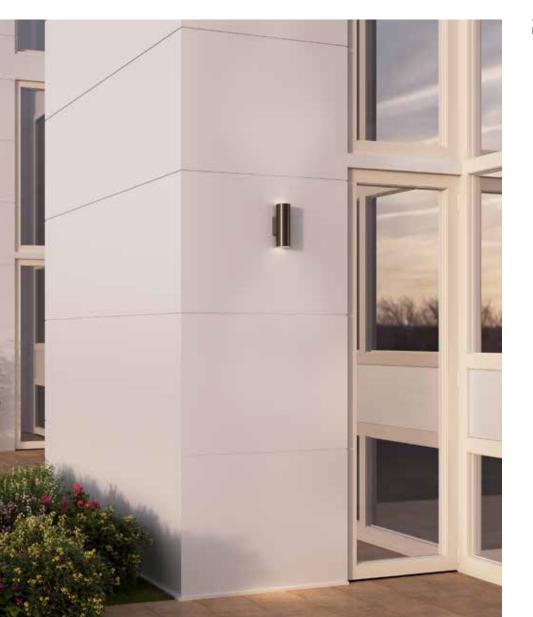

LEDWALL-A






Brooklyn







The key design element of our LED wall mount is the removable lens. This feature allows for three distinctive styles during installation.

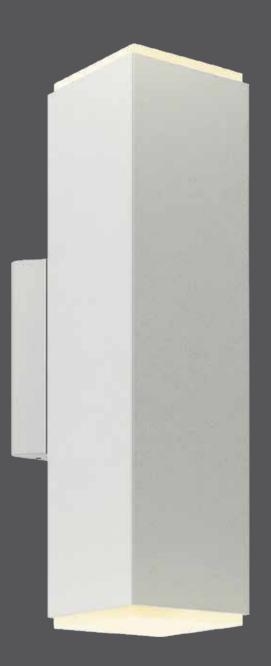

Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-B	29 W	2100 lm	2260 lm	90	3000 K	120 V - 277 V

Square housing made of extruded aluminum

Fixture canopy made of die-cast aluminum

LED module is mounted on an aluminum heat sink to maximize heat dissipation and extend product life

The square wall mount comes with 3 optical options:

- Bright aluminum reflector that provides a 45° beam spread
- Frosted glass lens to allow a wider beam spread

• Die-caster aluminum cap to allow a down only version

Compatible with TRIAC, ELV and 0-10 V dimmers

The LED board is sealed with a clear tempered glass lens to assure weatherproof operation

Baked powder paint coat for a highly durable finish

Integrated dimmable driver

JA8 certified

Energy Star certified

ADA compliant

Suitable for wet locations


Refer to website for dimmer compatibility

Ideal operating temperature:

–20° to 40° C

5-year warranty


Finish



Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDWALL-B

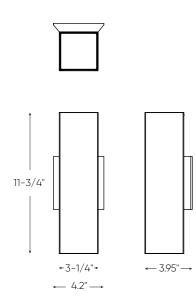



Durban

With a unique front panel design, our LED wall mount combines functionality with creativity. This type of fixture is ideal for highend residential applications.








Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-D	14 W	250 lm	1460 lm	80	3000 K	120 V
Specifications		Finish			Note	
Over 50,000 hours Made of extruded Warm white light of Unique light patter Low energy consun Warm white light of Superior color cons Integrated dimmak Galvanized steel m ADA compliant Suitable for wet loc	aluminum utput n nption utput sistency ole driver iounting plate	BK Black			Other color °T and finish may require MOQ's and Please contact your DAL for more information.	longer lead times.
	r dimmer compatibilit	ty				
ldeal operating ter -20° to 40° C	nperature:					
5-year warranty						

LEDWALL-D

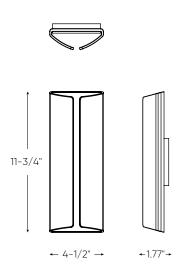



Edinburgh

European inspiration is made prevalent in this LED wall mount. Indirect lighting allows for a unform and even light output that will enhance every application.








Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-E	16 W	870 lm	1200 lm	90	3000 K	120 V

Made of extruded aluminum Fully sealed light engine Over 50,000 hours of service life Unique up and down lighting output Low profile design Warm white light output Superior color consistency Integrated dimmable driver ADA compliant

Suitable for wet locations

Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty

Finish




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.




LEDWALL-E

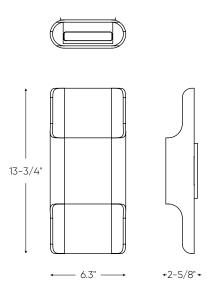

Geneva

UPGRADE






Imagine being able to manually control the amount of light spread coming from both the top and bottom of your lighting fixture. This is now possible with our LED wall mount.



Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-G-CC	14 W	600 lm	800 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
Specifications		Finish				
Made of extruded alu	uminum	BK Blac	ck			
Switch-selectable CC 3000 K/3500 K/4000		anopy				
Over 50,000 hours of	service life	Note				
Separately adjustable up and down lighting		Other color °1	and finishes availd	LEDWALL-G-CC		
Easily adjustable lighting angle from 0° to 92°		Please contac for more infor	ct your DALS representation.	entative		
Low power consumpt	tion					
Superior color consist	tency				4.5625"	
Directional lighting						
Integrated dimmable	e driver					
ADA compliant						\sim
Suitable for wet locations						
Refer to website for dimmer compatibility		ibility			4.5625"	3.75"
Ideal operating temp -20° to 40° C	perature:					
5-year warranty						

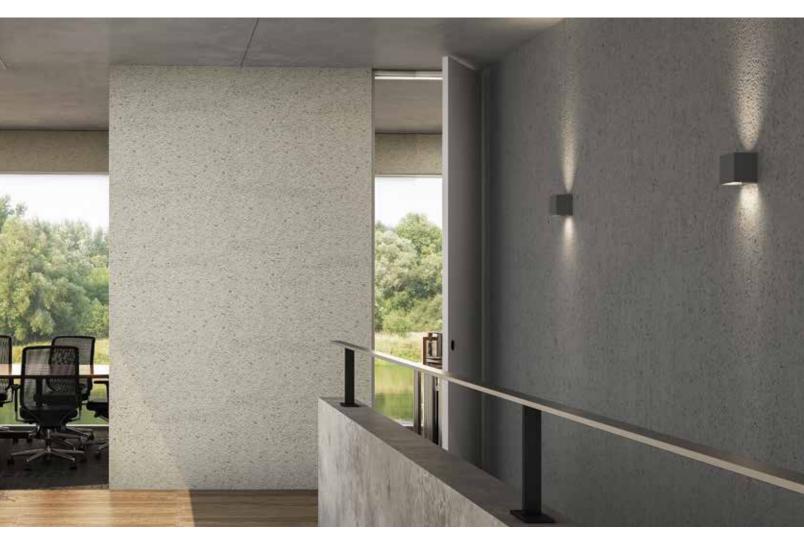

Harlow

This distinctive LED wall-mounted sconce permeates a gentle multi-directional light. Its unique geometric shape and robust design will provide a dramatic flare to any indoor/outdoor space. Ideal for residential and commercial projects, its warm splashes of light create an impressive architectural and alluring touch.







Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDWALL-H	15 W	900 lm	1000 lm	90	3000 K	120 V

Made of extruded aluminum Fully sealed light engine Over 50,000 hours of service life Unique up and down lighting output Low profile design Warm white light output Superior color consistency Integrated dimmable driver ADA compliant Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty


Finish

BK Black

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.







Alto





The Alto blends light functionality with an opportunity for artistic creation. Combine multiple fixtures to create infinite compositions or simply use alone, the choice is yours.







Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SQS06	8 W	500 lm	750 lm	90	3000 K	120 V
SQS10	13 W	940 lm	1200 lm	90	3000 K	120 V
SQS15	22.5 W	1590 lm	2112 lm	90	3000 K	120 V

Specifications


Cast aluminum construction Fully sealed light engine Over 50,000 hours of service life Low profile design Warm white light output Superior color consistency Integrated dimmable driver ADA compliant Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty


Finish




Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.





1-1/2"





U 1-1/2"

Cubix







Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage	
LEDWALL001D	7 W	540 lm	600 lm	90	3000 K	120 V	
Specifications		Finish		No	te		
Over 50,000 hours of Cast aluminum con Warm white light ou Up and down lightir Easily adjustable lig	struction Itput ng	 BK Black SG Silve WH White 	er grey	ma Ple	Other color ^o T and finishes available, but may require MOQ's and longer lead time: Please contact your DALS representative for more information.		
from 0° to 92° Low power consum Superior color consi Directional lighting							


LEDWALL001D

5-year warranty

Integrated dimmable driver Suitable for wet locations

ldeal operating temperature: -20° to 40° C

Refer to website for dimmer compatibility





Rondo




This innovative sleek designed LED wall mount provides the perfect solution for your lighting needs. By adjusting the directional panels, you can create the most original effect in your setting.



Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage	
LEDWALL002D	7 W	540 lm	600 lm	90	3000 K	120 V	
Specifications		Finish		No	te		
Over 50,000 hours of service life		BK Black		Ot	Other color °T and finishes available, but		
Cast aluminum const	ruction				ay require MOQ's and	0	
Warm white light out	out				ease contact your DA more information.	ALS representative	
Up and down lighting	3			101	more information.		
Easily adjustable ligh from 0° to 92°	ting angle						
Low power consumpt	tion						
Superior color consist	tency						
Directional lighting							
Integrated dimmable	driver						
Suitable for wet locat	tions						
Refer to website for c	limmer compo	atibility					
Ideal operating temp -20° to 40° C	erature:						
5-year warranty							



LEDWALL002D



Marquee



Inspiration will come in abundance once you try our LED accent step lights. Use them outdoors on your deck or on the stairs inside your home. You will be truly impressed by the effect!



Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDSTEP001D	3 W	90 lm	205 lm	80	3000 K	120 V

Specifications

Die-cast aluminum housing Over 50,000 hours of service life Warm white light output Optimized light spread Low power consumption Excellent color rendering Superior light color consistency Aesthetic profile Dimmable Install in standard electrical junction box Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty


Finish


BK Black
SG Silver grey
WH White

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDSTEP001D



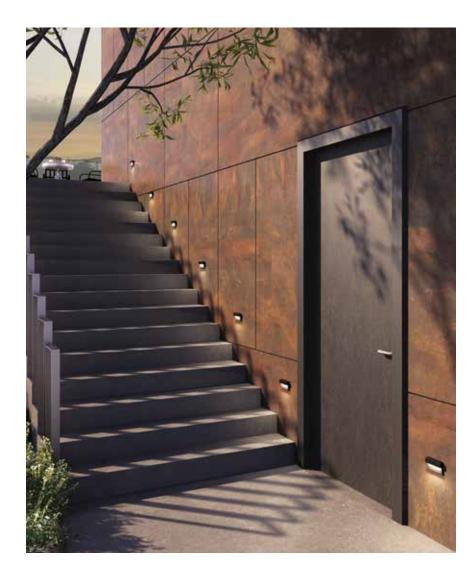


Echo



Inspiration will come in abundance once you try our LED accent step lights. Use them outdoors on your deck or on the stairs inside your home. You will be truly impressed by the effect!



Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDSTEP002D	3 W	70 lm	285 lm	80	3000 K	120 V
Specifications		Finish		No	te	
Die-cast aluminum h Over 50,000 hours o Warm white light out Optimized light spred Low power consump Excellent color rende Superior light color o Aesthetic profile	f service life tput ad otion ering		ack Iver grey 'hite	mc Ple	Other color °T and finishes available, b may require MOQ's and longer lead tin Please contact your DALS representati for more information.	

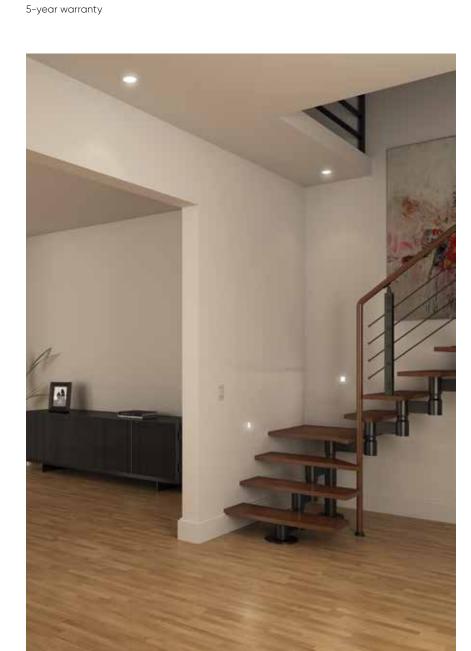

Install in standard electrical junction box


Refer to website for dimmer compatibility

Suitable for wet locations

-20° to 40° C

Ideal operating temperature:

LEDSTEP002D



Pearl



The simplicity of this design allows for the highest level of flexibility when choosing your application. Light glowing from all directions creates the perfect ambiance for every setting.



Model Watts		Delivered lumens	LED lumens	CRI	Color °T	Voltage		
LEDSTEP004D	3 W	40 lm	285 lm	80	3000 K	120 V		
Specifications		Finish		No	te			
Die-cast aluminum I	nousing	BK Black		Ot	Other color °T and finishes available, but			
Over 50,000 hours c	f service life	○ WH White			may require MOQ's and longer lead times. Please contact your DALS representative			
Warm white light ou	tput	Ũ			ease contact your DA more information.	LS representative		
Optimized light spre	ad			101	more information.			
Low power consump	otion							
Excellent color rende	ering							
Superior light color of	consistency							
Aesthetic profile								
Dimmable								
Includes a junction k concrete application								
Suitable for wet loca	ations							
Refer to website for	dimmer compatibil	ty						



Ideal operating temperature: -20° to 40° C

LEDSTEP004D





→ 0.875"

+

Camber








Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDSTEP005D	3 W	100 lm	285 lm	80	3000 K	120 V

Specifications

Die-cast aluminum housing Over 50,000 hours of service life Warm white light output Optimized light spread Low power consumption Excellent color rendering Superior light color consistency Aesthetic profile Install in standard electrical junction box Dimmable Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty


Finish



Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

LEDSTEP005D





Arc



The innovation of this design comes from its recessed installation. This step light will be perfectly integrated into stairs and can also be used on decks.




Model	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDSTEP006D	3 W	120 lm	285 lm	80	3000 K	120 V
Specifications		Finish		Not	e	


Die-cast aluminum housing Over 50,000 hours of service life Warm white light output Optimized light spread Low power consumption Excellent color rendering Superior light color consistency Aesthetic profile Dimmable Install in standard electrical junction box Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty BK Black
SG Silver grey
WH White

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.



LEDSTEP006D



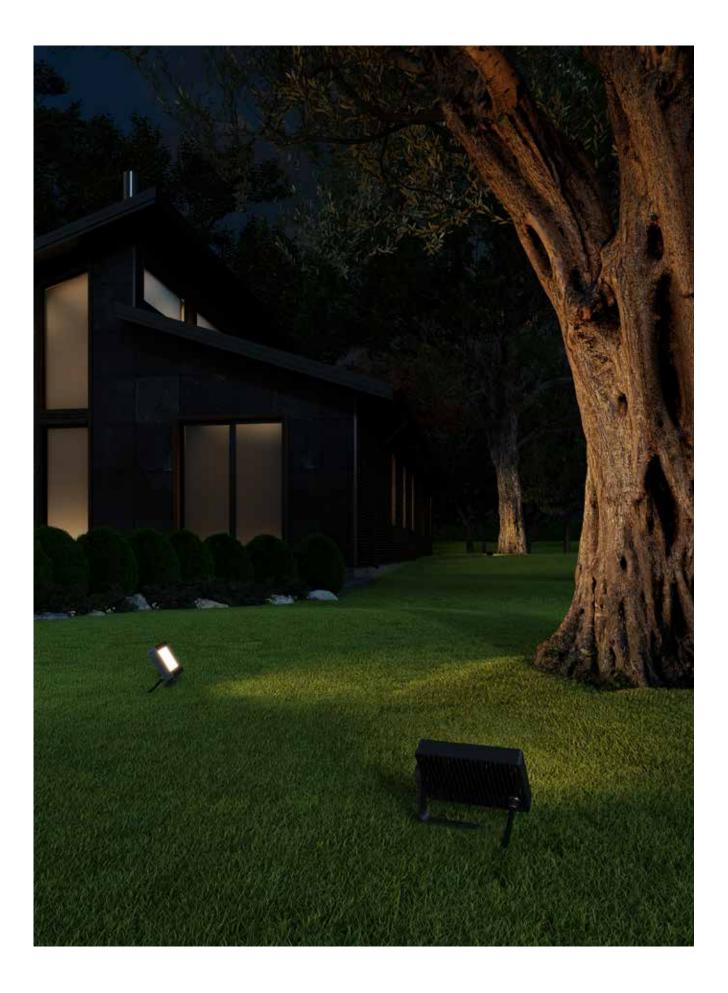





CONNECTION GUIDE



SMART CONNECTION GUIDE

240 SPOT LSP3-CCL LSP4-CCL



EDGE LSQP-CC



FLUX



BEACON LPL26-CC

256

248 COLUMN LRB20-CC LRB30-CC

STATURE LEDPATH003D LEDPATH004D



TRANSFORMERS LTRP-60 LTR-300



254 CORE DCP-TR60 DCP-TR200



ORBIT DCP-SPT6



GRAVITY DCP-GRD4

260

HORIZON DCP-FLD30



n

GAÏA DCP-CPL24



264 AXIS DCP-STK20 DCP-STK50



MASON





ORION



272 ACCESSORIES





How to create

A low-voltage landscape lighting plan

The three main components



A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoorrated GFCI electrical outlet.
- * Avoid mounting the transformer in shady areas, this could interfere with the "dusk-to-dawn" photoelectric cell.
- * Should be installed at least 36" (3 feet) off the ground.




B. Landscape lighting fixtures

- Integrated LED spot lights, path lights, and bollards.
- Powered by the transformer
- *When you choose lights, add up the total wattage they consume. You'll need this number for choosing other parts of your landscape lighting system.

<u>....</u>

C. Landscape lighting wire

- The wire connecting the transformer to the light fixtures.
- Rated according to the size of its conductor (gauge)
- * A 12-gauge wire is larger and can handle more wattage than a 14-gauge wire.
- * Selecting the right wire size is important and will prevent any issues down the road.

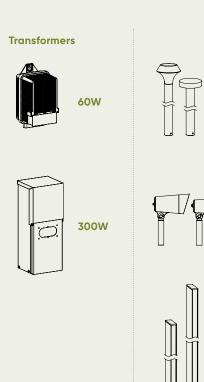

Path lights

These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.

Spot lights

Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.

Bollards

Use these lights to enhance the look of your yard while making walkways obvious at night.

Landscape wire



Versatile 12, 14, and 16 gauge low-voltage wire for spot lights, path lights, and bollards.



Mix it up! Different types of fixtures can be connected together.

The four steps for an LED landscape installation

1. Map out a plan

- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.

2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.

3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. However, the total wattage of your lights should be 20 percent less than the transformer's rated wattage.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the fixtures.



4. Wiring

Now you need to provide power to the fixtures. The length of runs helps determine what gauge of wire to buy. As a general rule, try to keep the runs under 50 feet with a maximum of 8 fixtures per run. Lower loads per run means lower voltage drop.

What is Voltage Drop?

Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 1.5-volt drop should be corrected.

Checklist

Before you get ready to install your lights, make sure you have all the tools and accessories required. Below is a basic list of what you might need.

- Landscape lights
- Transformer
- Wire
- Waterproof junction box to protect connections
- Flat-blade shovel or edger
- Wire cutters
- Wire strippers
- Voltage meter
- Tape measure
- Hardware to install transformer on house or post



Check your LED fixtures' voltage requirements. This plan is for use as a guide only to help you begin your lighting project. We strongly recommend checking the actual voltage at each fixture with a volt-meter before burying and finalizing your project.

Minimize voltage drop, and wasting wire, by using one of the wiring methods below:




Daisy Chain

Connects all fixtures in a linear fashion, where the first fixture connects to the transformer.

Tip:

Use the Daisy Chain method when fixtures are not grouped and can be easily connected in a chain.



T-Method

Similar to the Daisy Chain method, except the transformer connects to the middle of the chain.

Tip:

Use the T-Method when you built a Daisy Chain in the field and want to connect it to the transformer from the middle of the chain – at whatever point saves you the most wire.



Hub Method


All fixtures run through a hub junction and are connected to a single line from the transformer, ensuring each fixture receives an equal share of voltage.

Tip:

Use the Hub Method when fixtures are grouped in a small area such as in a garden bed.

How to create

A Dals Connect PRO Smart Landscape Plan

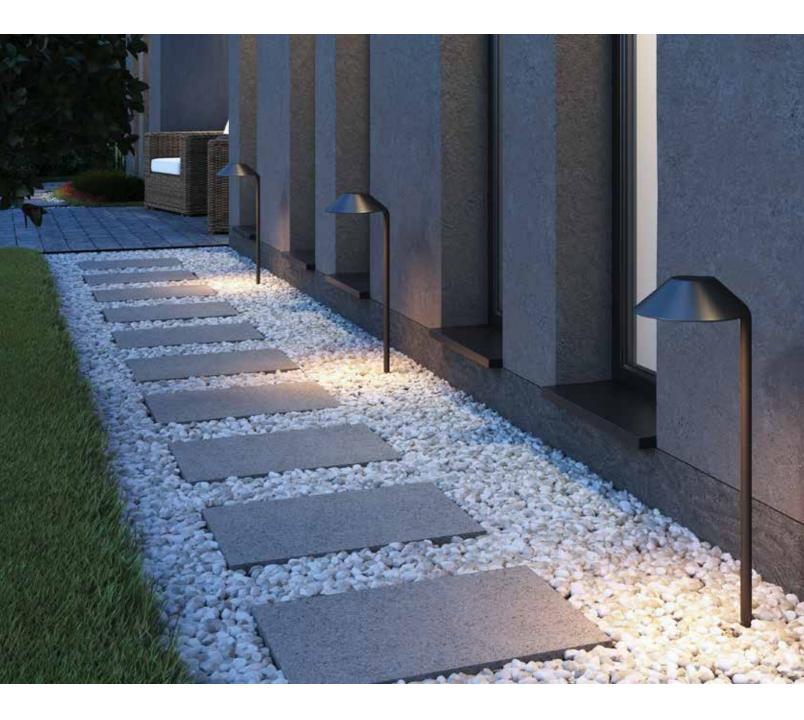

The main components



A. Low-voltage transformer

- The power supply for your system
- Usually mounted near or on the house that is plugged into a regular outdoorrated GFCI electrical outlet.
- * Avoid mounting the transformer in an area with poor Wi-Fi reception.
- * Should be installed at least 36" (3 feet) off the ground.



B. Landscape lighting fixtures

- Dals Connect PRO integrated LED spot lights, path lights, flood light, step light, stick light or ground light.
- Powered by the transformer
- * When you choose lights, add up the total wattage they consume. You'll need this number for choosing the right transformer for your system.

All Dals Connect PRO Landscape products come with a 6-foot extension wire and a T-connector for easy plug-and-play to faciliate installation.



Mix it up! Different types of Dals Connect PRO fixtures can be paired together with your smart landscape

Transformers

These 24V transformers come in two power capacities, 60W and 200W. An integrated PRO hub is also included.

Plug-in Transformer & Dals Connect PRO Hub

Use the 36W DC adapter paired with a PRO Hub for smaller landscape projects

Plug-in Transformer



Use the 36W DC adapter paired without a hub for smaller landscape projects with local controls.



Path lights

These fixtures aren't limited to paths. When mounted in gardens, they provide a gentle glow that lights a small surrounding area of plants, rock, or mulch.



Spot lights

Use spotlights to make trees, plants, shrubbery, or a home's architectural features stand out.

Stick lights

Use these lights to enhance the look of your yard while making walkways obvious at night.

Step Light



These fixtures can be surface mounted to almost anything to provide a soft glow to anything under it.



Rock Light

Bring magic to your landscape with these glowing rocks.



Use these lights to create wall washes or illuminate big portions of your yard

Ground Light



Use ground lights to illuminate trees and plants from below or decorate the floor of your deck.

The science behind your SMART landscape

1. Map out a plan


- Start your layout by creating a sketch of your property.
- Be accurate with dimensions to help estimate distances for wire runs.
- Try sketching and measuring as you walk around the property marking where each fixture will be placed.
- You can also mark the spots on your land where the Wi-Fi signal drops on your phone, this will help determine the preferred spot for your transformer placement.

2. Set fixture locations

- Mark their locations with small flags on your property and indicate their placement on your sketch.
- Measure distances between fixtures and write them down on your layout.
- Note how far away your Wi-Fi signal can reach.
- Check that all smart landscape products are within 30-50 feet of each other for maximum connectivity.
- We recommend pairing your smart landscape lights closer to the house first, and then move them to their desired location. An Internet connection is required for the first pairing.

3. Choose a power supply

- To figure out which power supply is best, consider two things: the total wattage of the lights that you're purchasing and if you anticipate adding lights in the future.
- When you add up the wattage of all lights, you'll have a good idea of how powerful your transformer needs to be. The total wattage cannot exceed the capacity of the transformer.
- Once you've selected the right transformer, the best placement is usually next to the house in a hidden location, as close as possible to the first fixture and to your Wi-Fi.

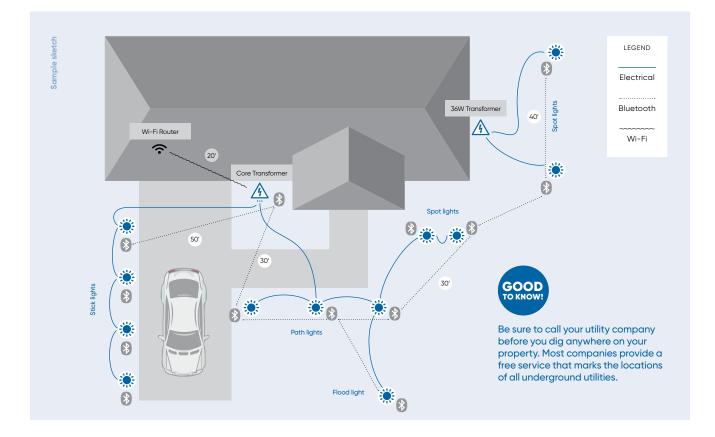

4. Wiring

To connect Dals Connect PRO smart landscape products, all you need is the included power extensions and T-connectors. Every connector has only 1 way to be plugged in, so making a mistake should be easy to avoid.

What is Voltage Drop?

Voltage decreases as it moves through a run of wire and a series of lights. This means that, because each light is receiving a little less than the one before it, lights can appear dimmer toward the end of a series. A small loss is OK, but anything more than a 2.5-volt drop should be corrected.


Checklist

Before you get ready to install your lights, make sure you have all the tools and accessories required. Below is a basic list of what you might need.

- Landscape lights
- Transformer
- Wire
- Tape measure
- Hardware to install transformer on house or post
- Your Wi-Fi password



Check your LED fixtures' wattage requirements. This plan is for use as a guide only to help you begin your lighting project. We strongly recommend planning your total load first and make sure you don't go over 100% load.

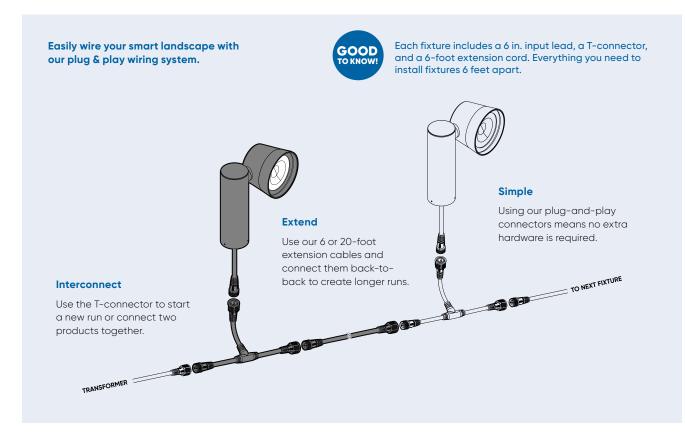

Spot





/ET Intertek

<u>180°</u>

This durable, fully sealed 12V LED landscape spot is constructed of solid aluminum. It includes an integrated LED module that emits a cool, natural, or warm white light in multiple beam patterns, all selectable with a 5CCT switch. Can be rotated 180° and equipped with a glare shield for pinpoint accuracy. The landscape spotlight is great for gardens, tree uplighting, architectural lighting, and more.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSP3-CCL	3"	10 W	500 lm	80	2200, 2700, 3000,	12 VAC
LSP4-CCL	4"	20 W	1000 lm		3500, 4000 K	

Specifications

Over 50,000 hours of service life 12VAC input Switch-selectable CCT: 2200 K/2700 K/ 3000 K/3500 K/4000 K Easy-access CCT switch on back of spot Interchangeable 20°, 40°, and 90° beam angle lens 180° swiveling head Cast aluminum construction Ground stake included Suitable for wet locations 5-year warranty

Finish

BK Black

Power supplies

LTRP-60-BK 60W, 120VAC 60Hz input 12VAC output low-voltage transformer

LTR-300-BK 300W, 120VAC 60Hz input 12/13/14/15VAC output low-voltage transformer

Note

Low-voltage transformer required. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Accessories

LAN-ACC-MS 6 ¾" metal ground stake

LSP-EXT04 4" extension arm

LSP-WM Spotlight wall mount adapters

LCBL-50-16 50 feet of 16 gauge low-voltage wiring

LCBL-100-16 100 feet of 16 gauge low-voltage wiring


LCBL-50-14 50 feet of 14 gauge low-voltage wiring

LCBL-100-14 100 feet of 14 gauge low-voltage wiring


LCBL-100-12 100 feet of 12 gauge low-voltage wiring

LCBL-200-12 200 feet of 12 gauge low-voltage wiring

LSP3-CCL



LSP4-CCL





Edge

NEW





A symmetrical luminaire made of rust-resistant aluminum and finished in a matte textured paint. Perfect for walkways, garden beds, or simply to direct the eye to some of your home's best features. Equipped with color-select technology that allows you to cast a particular color of light.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LSQP-CC	12"	3 W	265 lm	80	2200, 2700, 3000,	12 VAC
					3500, 4000 K	

Specifications

Over 50,000 hours of service life 12VAC input Ground stake included 90° beam angle Cast aluminum construction Switch-selectable CCT: 2200 K/2700 K/ 3000 K/3500 K/4000 K 21" extension tube included Suitable for wet locations 5-year warranty

Note

Low-voltage transformer required. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Finish



Power supplies

LTRP-60-BK 60W, 120VAC 60Hz input 12VAC output low-voltage transformer

LTR-300-BK 300W, 120VAC 60Hz input 12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16 50 feet of 16 gauge low-voltage wiring


LCBL-100-16 100 feet of 16 gauge low-voltage wiring

LCBL-50-14 50 feet of 14 gauge low-voltage wiring

LCBL-100-14 100 feet of 14 gauge low-voltage wiring

LCBL-100-12 100 feet of 12 gauge low-voltage wiring

LCBL-200-12 200 feet of 12 gauge low-voltage wiring

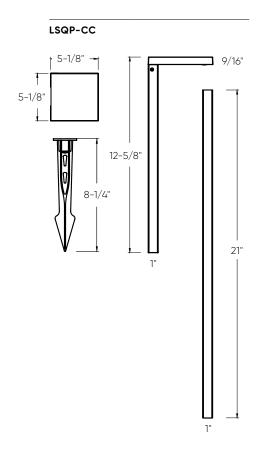



Flux



Add visual interest to your garden with the Flux outdoor path light. A 360° light spread and cast aluminum construction with a powder-coated finish fits best along pathways, garden beds, and walkways.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage	
LPP20-CC	20"	8 W	360 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC	
Specifications			Finish		Accessories		
Over 50,000 hours of service life 12VAC input			BK Black	BK Black		LCBL-50-16 50 feet of 16 gauge low-voltage wiring	
Ground stake included 93° beam angle			Power supplies		LCBL-100-16 100 feet of 16 gauge low-voltage wiring		
Frosted lens Can be mounted	d to wood or co	oncrete	LTRP-60-BK 60W, 120VAC 60Hz inpu 12VAC output low-volta		LCBL-50-14 50 feet of 14 gauge low-voltage wiring LCBL-100-14 100 feet of 14 gauge low-voltage wiring		
(screws not inclu Cast aluminum a			LTR-300-BK				
Switch-selectable CCT: 2200 K/2700 K/ 3000 K/3500 K/4000 K		300W, 120VAC 60Hz inp 12/13/14/15VAC output I transformer		LCBL-100-12 100 feet of 12 gauge low-voltage wiring			
Suitable for wet locations 5-year warranty					LCBL-200-12 200 feet of 12 gauge low-voltage wiring		
Note							


LPP20-CC

Sold separately.

for more information.

Low-voltage transformer required.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative





19-5/8" 01-15/16



Beacon



The Beacon, a minimal light that creates a big impact. Light up garden beds, walkways, or driveways with this lowvoltage LED fixture made of solid aluminum with a black powder-coated finish. The included ground spike allows this light to be placed effortlessly in any area of your yard.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage	
LPL26-CC	26"	13 W	800 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC	
Specifications			Finish		Accessories	Accessories	
Over 50,000 hours of service life 12VAC input			BK Black		LCBL-50-16 50 feet of 16 gauge low-voltage wiring		
Ground stake included 147° beam angle			Power supplies		LCBL-100-16 100 feet of 16 gauge low-voltage wiring		
Frosted lens Can be mounted t	o wood or co	oncrete	LTRP-60-BK 60W, 120VAC 60Hz input		LCBL-50-14 50 feet of 14 gauge low-voltage wiring		
(screws not included) Cast aluminum construction Switch-selectable CCT: 2200 K/2700 K/ 3000 K/3500 K/4000 K		//	12VAC output low-volto LTR-300-BK 300W, 120VAC 60Hz inp	-	LCBL-100-14 100 feet of 14 gauge low-voltage wiring		
		12/13/14/15VAC output transformer		LCBL-100-12 100 feet of 12 gauge low-voltage wiring			
Suitable for wet locations 5-year warranty					LCBL-200-12 200 feet of 12 gauge low-voltage wiring		


Sold separately.

Note

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Low-voltage transformer required.

LPL26-CC

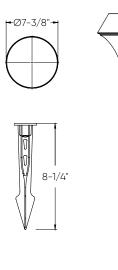

25-5/8"



Column



The Column series, a robust rectangular bollard that features a minimalist design for the ultimate in urban sophistication. Constructed of solid aluminum, it provides a chic solution to eco-conscious homeowners.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LRB20-CC	20"	12 W	600 lm	80	2200, 2700, 3000,	12 VAC
LRB30-CC	30″	13 W	700 lm		3500, 4000 K	

Specifications

Over 50,000 hours of service life 12VAC input Ground stake included 109° beam angle Frosted lens Can be mounted to wood or concrete (screws not included) Cast aluminum construction Switch-selectable CCT: 2200 K/2700 K/ 3000 K/3500 K/4000 K Suitable for wet locations

5-year warranty

Note

Low-voltage transformer required. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

Finish

BK Black

Power supplies

LTRP-60-BK 60W, 120VAC 60Hz input 12VAC output low-voltage transformer

LTR-300-BK 300W, 120VAC 60Hz input 12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16 50 feet of 16 gauge low-voltage wiring

LCBL-100-16 100 feet of 16 gauge low-voltage wiring


LCBL-50-14 50 feet of 14 gauge low-voltage wiring

LCBL-100-14 100 feet of 14 gauge low-voltage wiring


LCBL-100-12 100 feet of 12 gauge low-voltage wiring

LCBL-200-12 200 feet of 12 gauge low-voltage wiring

LRB20-CC



LRB30-CC






Stature





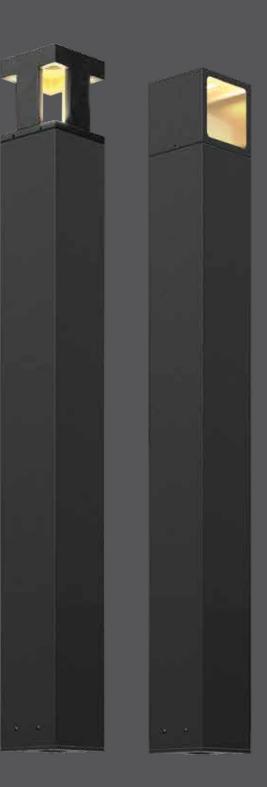

Model	Height	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
LEDPATH003D	36"	7.5 W	180 lm	700 lm	90	3000 K	120 V
LEDPATH004D	36"	7.5 W	350 lm	700 lm	90	3000 K	120 V


Finish

Over 50,000 hours of service life "X" shaped lighting pattern (LEDPATH003) Low power consumption Superior color consistency Integrated dimmable driver Anchor bolts included Suitable for wet locations Refer to website for dimmer compatibility Ideal operating temperature: -20° to 40° C 5-year warranty **BK** Black


SG Silver grey (LEDPATH004D only)

Note


Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALS representative for more information.

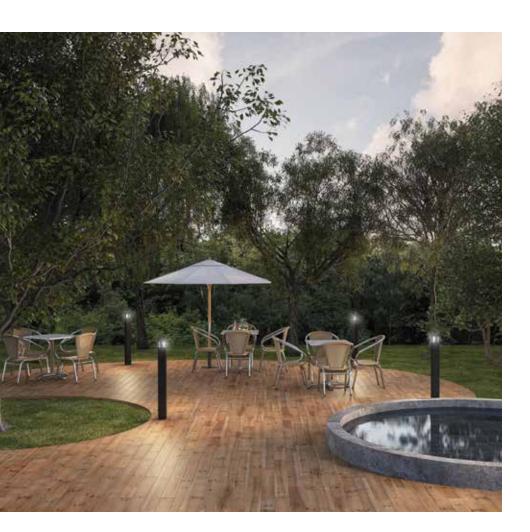

LEDPATH003D



LEDPATH004D



Low-voltage transformers

Outdoor low-voltage transformers with timer and photocell sensor, 120V AC to 12V/13V/14V/15V AC, weatherproof.







Model

LTRP-60-BK

60W low-voltage transformer







Specifications

Constant voltage mode power supply Protection: short circuit / Over voltage Input voltage: 120VAC 60Hz Output voltage: 12VAC Output Power: 60W Maximum recommended load: 80% Operating temperature: -30°C to 45°C UL certification 5 year warranty

Finish


BK Black

Model

LTR-300-BK

300W low-voltage transformer





Specifications

Constant voltage mode power supply Protection: short circuit / Over voltage Fully isolated metal case -Cooling by air convection Input voltage: 120VAC 60Hz Output Power: 300W Output voltage: 12, 13, 14, 15VAC Photocell sensor Maximum recommended load: 80% Operating temperature: -30°C to 45°C UL certification 5 year warranty

Finish

BK Black






The heart of your connected landscape system. By adding the Core, you unleash the full potential of smart lighting.



Model

DCP-TR60

60W low-voltage smart transformer



Specifications

Constant voltage mode power supply Protection: short circuit / Over voltage Input voltage: 120VAC 60Hz Output voltage: 24V DC Output Power: 60W Maximum recommended load: 80% Operating temperature: -30°C to 45°C Control with the Dals Connect app Integrated Hub Number of supported smart devices per hub: 128 Can be controlled locally (without internet) Works with Dals Connect PRO devices Secure connection Can be used with a voice-controlled assistant Supports Wi-Fi and BLE Mesh protocols 5-year warranty

Finish

BK Black

Download the Dals Connect app


Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



Model

DCP-TR200

200W low-voltage smart transformer



Specifications

Constant voltage mode power supply Protection: short circuit / Over voltage Input voltage: 120VAC 60Hz Output voltage: 24V DC Output Power: 2x 100W outputs Maximum recommended load: 80% Operating temperature: -30°C to 45°C Control with the Dals Connect app Integrated Hub Number of supported smart devices per hub: 128 Can be controlled locally (without internet) Works with Dals Connect PRO devices Secure connection Can be used with a voice-controlled assistant Supports Wi-Fi and BLE Mesh protocols 5-year warranty

Finish

BK Black

Download the Dals Connect app

Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



Orbit





A swiveling, low profile light designed to brighten a number of exterior applications. Ideal for walkways and flower beds but fits comfortably in any environment. Add a second or third fixture together and create a multi-head device.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-SPT6	6"	10 W	540 lm	90	RGB + 2200 K - 4000 K	24 V DC

Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan 120° frosted lens included Bluetooth mesh technology 40° beam angle Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty


Note


Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black

DCP-SPT6





Smart transformers

DCP-TR60-BK 60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver

DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake

DCP-ACC-MB Mounting bracket

DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector

DCP-SPTEXT14 14" extension tube



Gravity



Recessed in-ground installation or surface mounted accent light. Made of durable die-cast aluminum for longevity. Perfect for garden uplighting or adding a touch of elegance to your balcony.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-GRD4	4"	10 W	515 lm	90	RGB + 2200 K - 4000 K	24 V DC


Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan Can be recessed or surface mounted Bluetooth mesh technology 40° beam angle Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black

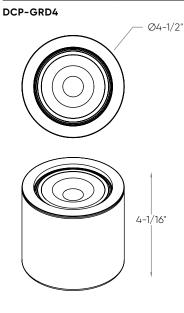

Smart transformers

DCP-TR60-BK 60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver

DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake

DCP-ACC-MB Mounting bracket

DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector



Landscape | dals.com 259

Horizon

Made of high strength aluminum alloy with adjustable precision. Incredibly bright with a 120° degree beam angle, it can be wall mounted or staked in the ground.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-FLD30	7"	30 W	3000 lm	80	RGB + 2200 K - 4000 K	24 V DC

Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan Can be wall mounted Bluetooth mesh technology 120° beam angle Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black

Smart transformers

DCP-TR60-BK 60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver

DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake


DCP-ACC-MB Mounting bracket

DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector



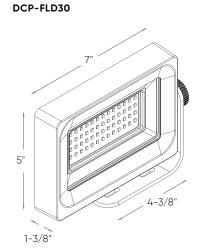

Gaïa

The main quality of this modern classic is providing downward, wide-area lighting that is both calming and practical. The luminaire includes a head that not only creates unique highlights in flower beds and neatly groomed lawns but can easily light up walkways and winding paths.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-CPL24	24"	6 W	470 lm	80	RGB + 2200 K - 4000 K	24 V DC

Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan Can be wall mounted Bluetooth mesh technology 120° beam angle Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black

DCP-CPL24

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver


DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake


DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector

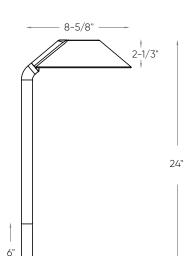



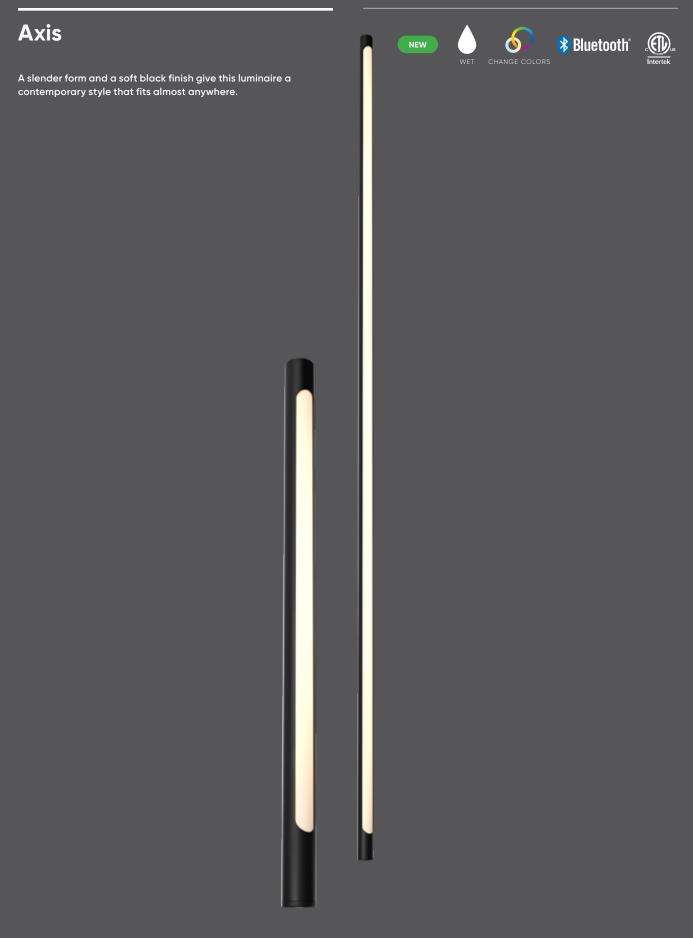

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-STK20	20"	6 W	310 lm	80	RGB + 2200 K - 4000 K	24 V DC
DCP-STK50	50"	12 W	565 lm			

Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan Bluetooth mesh technology 120° beam angle Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black

Smart transformers

DCP-TR60-BK 60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK 200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver

DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake


DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector

Ø1"

DCP-STK20 / DCP-STK50

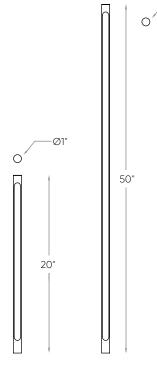



Mason

NEW





With its minimalistic form, simple casing and subtle appearance, Mason fits seemlessly into the architecture of any home.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage	
DCP-BRK12	12"	8 W	280 lm	80	RGB + 2200 K - 4000 K	24 V DC	
Specifications		Sma	ırt transformers		Accessories		
Excellent color rendering			P-TR60-BK		DCP-PTR36		
Full color spectru	Full color spectrum		V, 120VAC 60Hz input, 24V		Plug-in driver		
2200K – 4000K in	pure whites	IOW-	-voltage smart transform	er	DCP-EXT6FT		
Superior LED perf	ormance and lifesp	un = ••	Р-TR200-ВК		6' extension cable		
Can be recessed	or surface mounted	1	W, 120VAC 60Hz input, 24		DCP-EXT20FT		
Bluetooth mesh te	echnology	IOW-	-voltage smart transform	er	20' extension cable		
40° beam angle					DCP-EXT-T		
Dimmable throug	h the Dals Connect	app Dow	nload the Dals Connect a	op	6" T-connector		
Over 50,000 hour	rs of service life	Crea	ate groups				
Suitable for wet la	ocations	Set	schedules				
5-year warranty			note access*				
, ,		-					

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

BK Black



15/16"

Compatible with Google Assistant and Amazon Alexa*



*Core needed



Kayu

NEW





Sprinkle your landscape with subtle touches of light. The Kayu series, a harmonious and organic fixture easily creates a welcoming atmosphere.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-RK10	10"	5 W	400 lm	80	RGB + 2200 K - 4000 K	24 V DC
DCP-RK18	18"	7 W	600 lm			

Excellent color rendering Full color spectrum 2200K - 4000K in pure whites Superior LED performance and lifespan Bluetooth mesh technology Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

○ WH White

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-PTR36 Plug-in driver


DCP-ACC-MS12 12" metal ground stake

DCP-ACC-MS06 6" metal ground stake


DCP-EXT6FT 6' extension cable

DCP-EXT20FT 20' extension cable

DCP-EXT-T 6" T-connector



DCP-RK18





Orion

NEW



Garden parties, birthdays or a relaxing dinner. Create the perfect atmosphere with the numerous lighting effects provided by the Orion string light.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-STG48	48'	12 W	1200 lm	80	RGB + 2200 K - 4000 K	24 V DC
Specifications		Finish			Download the Dals Connect app	•
Bluetooth mesh tec	ure whites ncluded ntrol mance and lifespan hnology the Dals Connect app	Bulb re DCP-S PCB rej			Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*	
Suitable for wet loce 5-year warranty	ations					

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.


DCP-STG48







Accessories

Model	Compatibility	Finish	Specification
LAN-ACC-MS	LSP3-CCL-BK	Blacxk	• Metal ground stake
▲ I	LSP4-CCL-BK		
WET			
LAN-ACC-PS	LPL26-CC-BK	Black	Plastic ground stake
▲ I	LPP20-CC-BK		
wet	LRB20-CC-BK		
	LRB30-CC-BK		
LCBL-50-16	LSP3-CCL-BK	Black	• 16, 14, and 12 gauge low-voltage wire
LCBL-100-16	LSP4-CCL-BK		in 50, 100, and 200 ft. lengths.
LCBL-50-14 LCBL-100-14	LPL26-CC-BK		
LCBL-100-14	LPP20-CC-BK		
LCBL-200-12	LRB20-CC-BK		
WET	LRB30-CC-BK		
LSP-EXT04	LSP3-CCL-BK	Black	• 4 in. extension arm
wet	LSP4-CCL-BK		
LSP-WM	LSP3-CCL-BK	Black	• Spotlight wall mount adapter
wet	LSP4-CCL-BK		

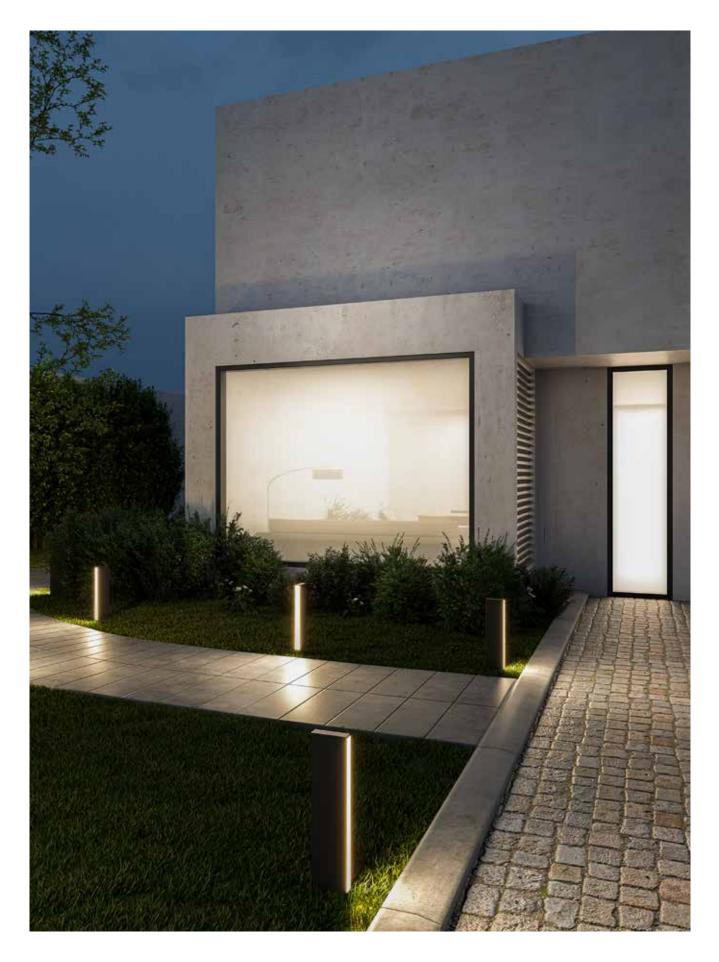

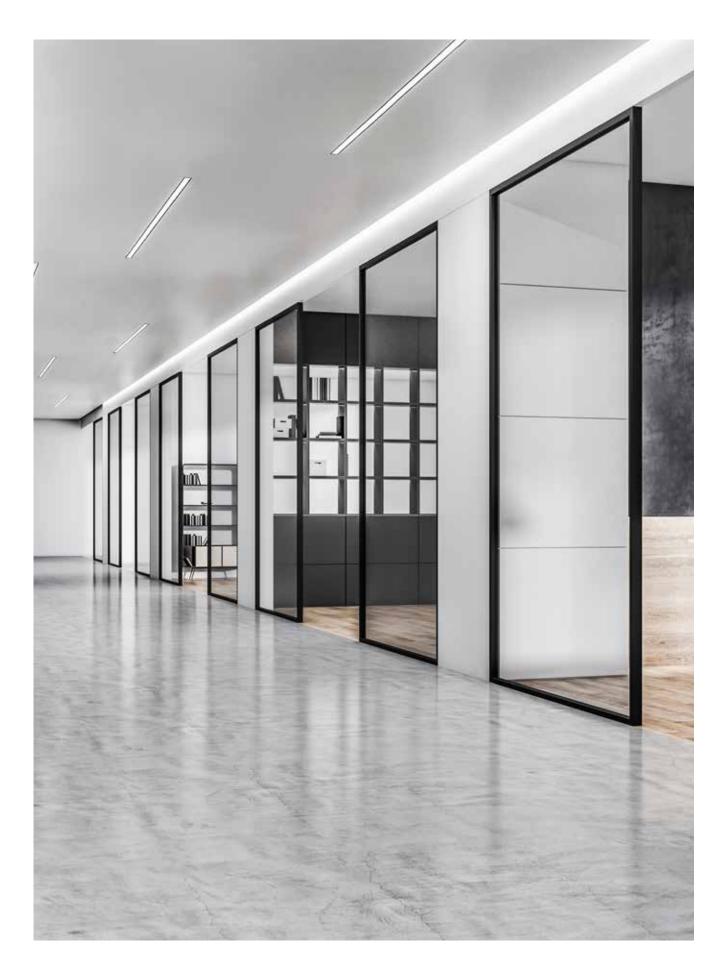

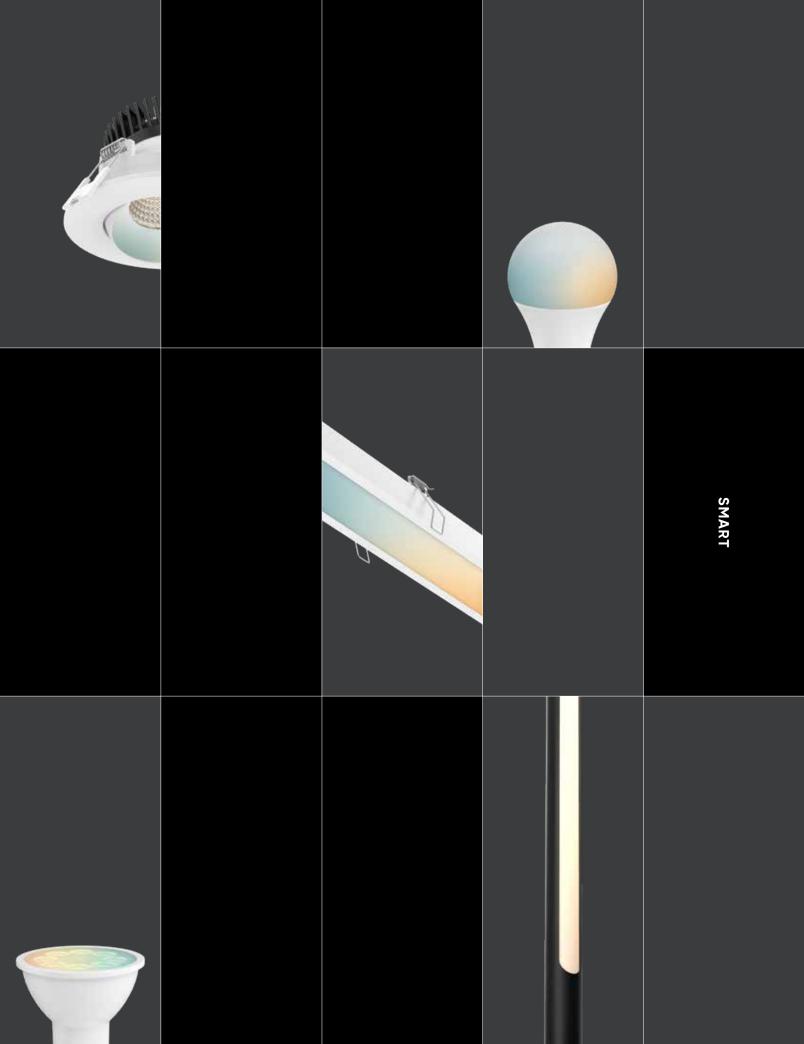



277 CONNECTION GUIDE

280 PRO HUB

DCP-HUB



282 **REVOLVE PRO** DCP-GBR35



284 ETCH PRO DCP-DDP4 DCP-DDP6



286 EXCEL PRO DCP-PNL4 DCP-PNL6



288 BOULEVARD PRO DCP-LNR24 DCP-LNR48



292 A21 PRO DCP-BLBA21

294 BR30 PRO DCP-BLBBR30

296 ARCHITECT PENDANT SM-LPD39



298 ARCHITECT WALL SM-LWS19



300 AXIS TABLE LAMP

SM-STTL20



304

RGR SMART SM-RGR4WH

306



308 EXCEL SMART SM-PNL4 SM-PNL6



310 DELTA SMART SM-FM08/14



312 A19 SMART SM-BLBA19

314



316 GU10 SMART SM-BLBGU10



318 PAR20 SMART SM-PAR20



320 SMART TAPE SM-TAP1M/ SM-TAP3M SM-TAP5M



SMART OUTDOOR TAPE SM-OTP24FT SM-OTPACC8FT



324

SMART LINEAR SM-UCL12/ SM-UCL24/ SM-UCL36



326 SMART PUCK SM-UP1/ SM-UPK3/ SM-UPK5

328 SMART WALL CONTROLLER

SM-WLCT

330

5

SMART PLUG SM-PLUG



332 SMART DIMMER SWITCH SM-DIMSW



334 ACCESSORIES





Smart | dals.com 276

dals ∥ connect



DALS Launched its first smart home products in 2017 and with over 250,000 devices sold as of December 2021, we have developed an application expertise.

In 2019, we launched our new DALS Connect platform which quickly established its leadership with its Wi-Fi direct product ecosystem. In 2022, DALS is launching its DALS Connect PRO product assortment, which uses a Bluetooth mesh technology; allowing for a much higher number of devices installed on a network as well as several other features.

Both DALS Connect and DALS Connect PRO products work together and can easily co-exists on the same application.

One APP – One smart ecosystem with technology options

There are many benefits to smart lighting



Experience

White color temperature, and a wide array of fun colors, are easily changeable, allowing you a multitude of lighting comfort.



Save

Save on energy and increase your home's security by using schedules or turning on/off the light remotely when no one is home.



Control

Easily control your lighting with smart switches, your phone, or a voice assistant for even more convenience.



Create

With the Dals Connect app, you can program your own lighting scenes for specific conditions and tasks like watching movies, daytime or nighttime reading, parties, etc. Within a scene, you can change the brightness, color temperature and even use different hues.

What are the main differences between DALS Connect and DALS Connect PRO?



Quick start – direct features

DALS Connect products use Wi-Fi wireless technology which is used widely to connect computers, tablets, smartphones, smart devices, and others to the internet. Wi-Fi is shared through a router to all Wi-Fi enabled devices. This technology allows for a lot of range and a lot of devices, although there are some limitations as well. Wi-Fi has a relatively high absorption rate and works best for line-of-sight uses. A residential wireless access point usually has a range of about 30 feet and a maximum of 20 devices, depending on the type of wireless access point.





dals CONNECT PRO

Higher number of devices – independent network

DALS Connect PRO uses Bluetooth-mesh technology. It works on the principle that each Bluetooth device on the mesh network can relay commands to another device, through the connection from the previous device. Bluetooth-mesh networking is a standard based on Bluetooth Low Energy that allows for many-to-many communication over Bluetooth radio. You can use your smart phone or tablet to control large groups of products even without an internet connection.

Dals Connect Pro hub

You can also add the Dals Connect Pro hub, to connect up to 128 DALS Connect PRO products to the cloud as a single internet connection (as opposed to DALS Connect products where each product has its individual connection). You can also use multiple hubs for projects with more than 128 devices, with each hub acting as an internet connection as well. Cloud connection allows you to use your products with voice command platforms (such as Google Home and Amazon Alexa) as well as allowing for remote control.





() ()

Not all Wi-Fi routers are created equal. A 30\$ router will not perform the same or support the same number of devices as a 350\$ router. The number of antennas will greatly increase your Wi-Fi range.



Most smart devices only operate on the 2.4 GHz spectrum, whereas most routers nowadays share the same band for 5 GHz and 2.4 GHz. If you experience issues with disconnecting devices or trouble adding new devices, try separating your 5 GHz and 2.4 GHz band on your router. Your internet service provider can help you set this up.

Which one is best for me?

Thanks to the Dals Connect Application, you don't have to use multiple apps to control all of your smart devices, even if you decide to mix and match communication technologies.

The Dals Connect App can support Bluetooth-mesh devices mixed with Wi-Fi devices, and you can add cloud connectivity to your Bluetooth-mesh devices using the Dals Connect Pro hub. All of these will work together, but which one is right for you? Let's find out.

	DALS Connect	DALS Connect PRO	DALS Connect PRO + Hub
Uses the DALS Connect App	•	•	•
Can be controlled from multiple devices at once	•		•
Range of operation from the controller (Wi-Fi router or another Bluetooth-mesh device)	30 FT	75 FT	75 FT
Number of supported smart devices	20	100*	128
Can be controlled locally (without internet)		•	•
Requires multiple access points to extend the range	•		
Secure connection	•	•	•
Can be used with voice-controlled assistant	•		•

*The actual maximum number of Bluetooth devices supported in a mesh network is much higher (32 767) but achieving these numbers would require professional network installations and mesh network segmentation.

. .

You can use a free network scanner tool to determine the limited range of your router. Wireless strength is represented as dBm (decibel-milliwatts) and a good Wi-Fi signal will usually range between -30 and -65 dBm. Anything lower than -65 dBm will most likely experience issues.



The technology you choose doesn't have to be all the same. You can easily combine Bluetooth Mesh devices with Wi-Fi devices thanks to the Dals Connect App. It all depends on the

application. If you wish to have smart recessed devices for your exterior soffits, you would opt for Dals Connect Pro products to gain maximum range and inter-connectivity, and could combine them with Wi-Fi products for your living room. The choice is up to you!

Pro hub



By connecting to the hub you enable communication with the cloud and the Dals Connect app, allowing users to easily view and control up to 128 smart devices for each hub that use the Bluetooth protocol. Supports Wi-Fi and BLE Mesh: You can control it remotely through Wi-Fi or locally through BLE, ensuring gateway availability even if there is no network.



Model	Size	Wi-Fi	Bluetooth	Number of supported devices	Alexa & Google Assistant compatible	Voltage
DCP-HUB	4"	\checkmark	\checkmark	128*	\checkmark	120 V

*Per Hub

Specifications

Indoor use only Control with the Dals Connect app Number of supported smart devices per hub: 128 Can be controlled locally (without internet) Works with Dals Connect PRO devices Secure connection Can be used with a voice-controlled assistant Supports Wi-Fi and BLE Mesh protocols 5-year warranty

Finish

O WH White

Note

For remote access a secured 2.4 GHz wireless network is required.

Download the Dals Connect app



DCP-HUB





Revolve Pro

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-GBR35	3.5"	12 W	650 lm	90	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites 40° beam angle 30° tilting, 360° rotation Dimmable through the Dals Connect app only Bluetooth mesh technology Minimal heat emission Aluminum construction Regressed light source Suitable for wet locations 5-year warranty

DCP-GBR35-WH

Ø3-1⁄2" –



Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Finish

O WH White

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed



Etch Pro

With reduced glare and a sleek and minimal construction, the Dals Connect Pro regressed panel lights will be a great addition to any project. Connect 100+ devices through Bluetooth, create groups, set schedules and select from a wide range of colors, all possible with the DALS Connect App[™].





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-DDP4WH	4"	15 W	1000 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-DDP6WH	6"	20 W	1500 lm	90	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites 125° beam angle Dimmable through the Dals Connect app only Bluetooth mesh technology Minimal heat emission Aluminum construction Regressed light source Suitable for wet locations 5-year warranty

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Finish

O WH White


Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed



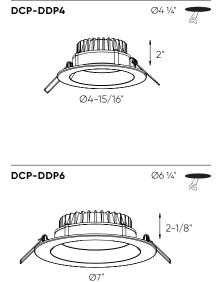

Excel Pro



The Dals Connect Pro panel lights will be a great addition to any project. Connect 100+ devices through Bluetooth, create groups, set schedules and select from a wide range of colors, all possible with the DALS Connect App[™].



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-PNL4WH	4"	14 W	750 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-PNL6WH	6"	20 W	1200 lm	90	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites Dimmable through the Dals Connect app only Bluetooth mesh technology Minimal heat emission Aluminum construction Suitable for wet locations 5-year warranty

Finish

○ WH White

Note


Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.


Download the Dals Connect app


Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed






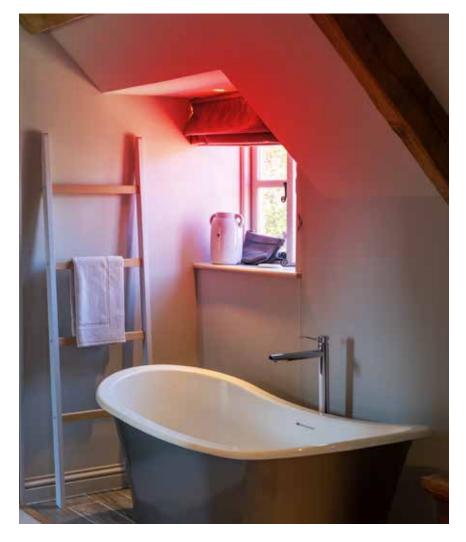

Boulevard Pro

The Boulevard series, an architectural recessed lighting channel that can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chained to create dramatic effects.



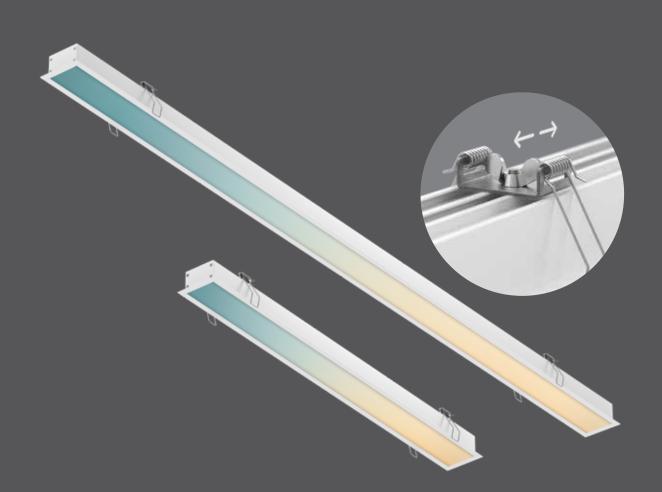

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LNR24	24"	20 W	1785 lm	90	RGB + 2700 K - 6500 K	120 V
DCP-LNR48	48"	40 W	3380 lm			

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites 108° beam angle Dimmable through the Dals Connect app only Bluetooth mesh technology IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 Suitable for dry locations 5-year warranty

Finish

O WH White

Accessories

LNACC-L16FT

16-foot lens for Boulevard series pendants and recessed linears

Note


Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.


Download the Dals Connect app


Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed

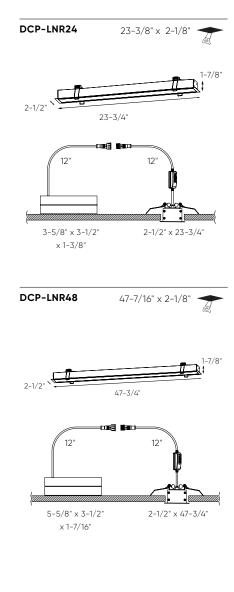

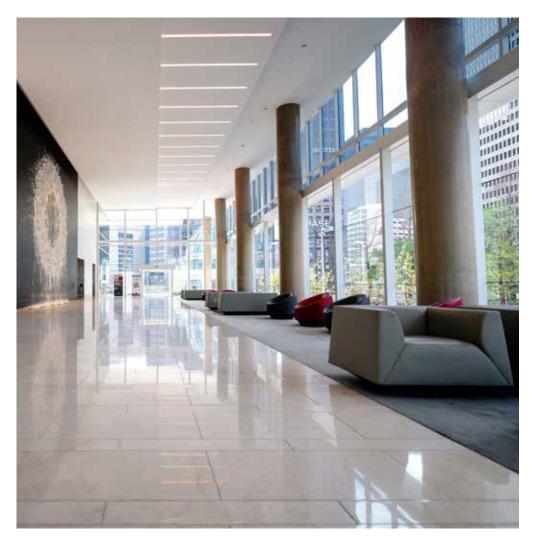

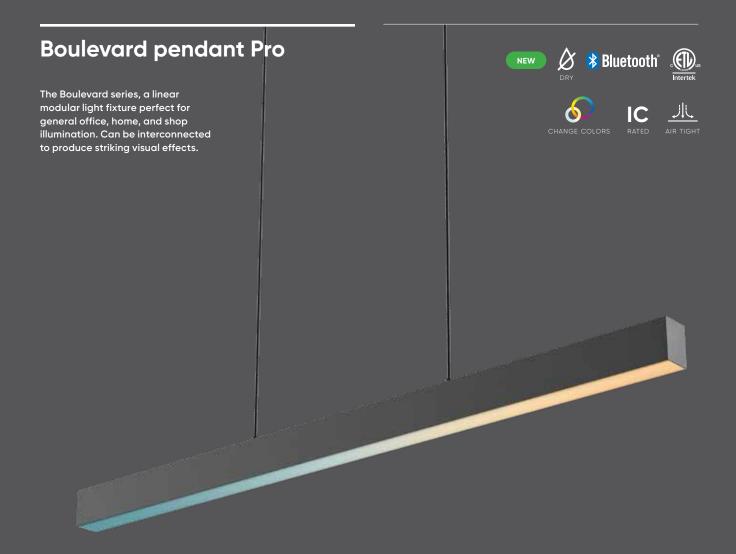

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LNPD48	48"	40 W	2620 lm	90	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites 108° beam angle Dimmable through the Dals Connect app only Bluetooth mesh technology IC certification (suitable for direct contact with insulation) For indoor use only Air-tight certified as per ASTM E283-04 5-year warranty

Finish

BK Black

Accessories LNACC-L16FT

16-foot lens for Boulevard series pendants and recessed linears

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.


Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed

DCP-LNPD48

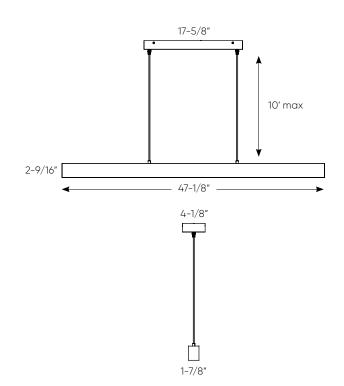




A21 Pro



Enter the world of Smart lighting with our array of dimmable LED Bluetooth controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K.

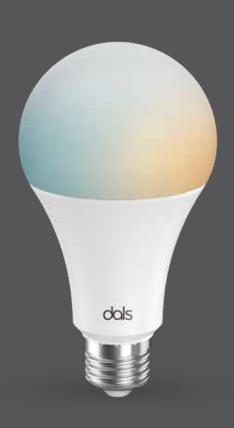

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-BLBA21	A21	12 W	1100 lm	90	RGB + 2700 K - 6500 K	120 V

Excellent color rendering Full color spectrum 2700K - 6500K in pure whites Superior LED performance and lifespan Minimal heat emission Suitable for enclosed fixtures Bluetooth mesh technology Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Finish

O WH White

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.


Download the Dals Connect app


Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*



*Hub needed

DCP-BLBA21



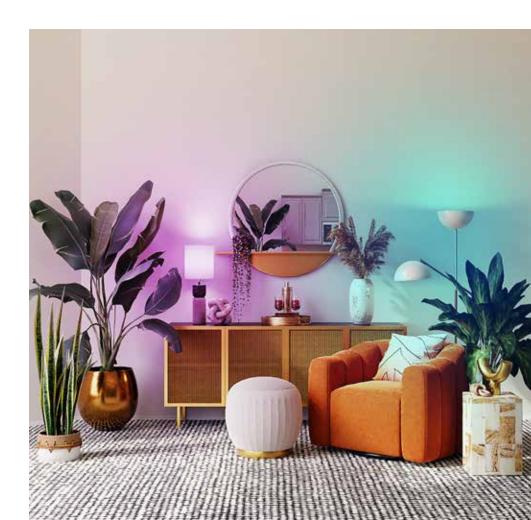

BR30 Pro



Enter the world of Smart lighting with our array of dimmable LED Bluetooth controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-BLBBR30	BR30	12 W	1200 lm	90	RGB + 2700 K - 6500 K	120 V

Excellent color rendering Full color spectrum 2700K - 6500K in pure whites Superior LED performance and lifespan Minimal heat emission Bluetooth mesh technology Dimmable through the Dals Connect app Over 50,000 hours of service life Suitable for wet locations 5-year warranty

Finish

O WH White

Note

Add the DALS Connect Pro Hub for even greater flexibility: voice control, remote access, expanded mesh network, ability to connect up to 128 devices per Hub.

Download the Dals Connect app

Create groups Set schedules Remote access* Compatible with Google Assistant and Amazon Alexa*




*Hub needed

DCP-BLBBR30





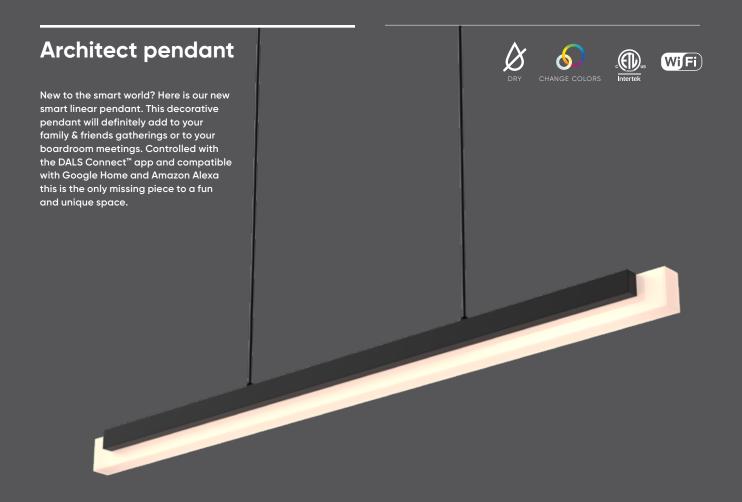

Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SM-LPD39	39.5"	30 W	1665 lm	1830 lm	80+	RGB + 2700 K - 6500 K	120 V

Made of extruded aluminum Over 50,000 hours of service life Adjustable height up to 10 feet Full color spectrum 2700K - 6500K in pure whites Dimmable through the Dals Connect app only For indoor use only Canopy mount on 4" octagonal junction box 5-year warranty



Finish


Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





SM-LPD39



Architect wall

Looking to add to your smart family products? Here is our new smart linear wall sconce. Not only decorative but also practical, this fixture can be controlled with the DALS Connect[™] app and is compatible with Google Home and Amazon Alexa. So many options at your fingertips - the possibilities are endless.









Model	Size	Watts	Delivered lumens	LED lumens	CRI	Color °T	Voltage
SM-LWS19	19.5"	15 W	1130 lm	1245 lm	80+	RGB + 2700 K - 6500 K	120 V


Made of extruded aluminum Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites Dimmable through the Dals Connect app only Wall mount on 4" octagonal junction box ADA compliant Suitable for wet locations 5-year warranty



Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



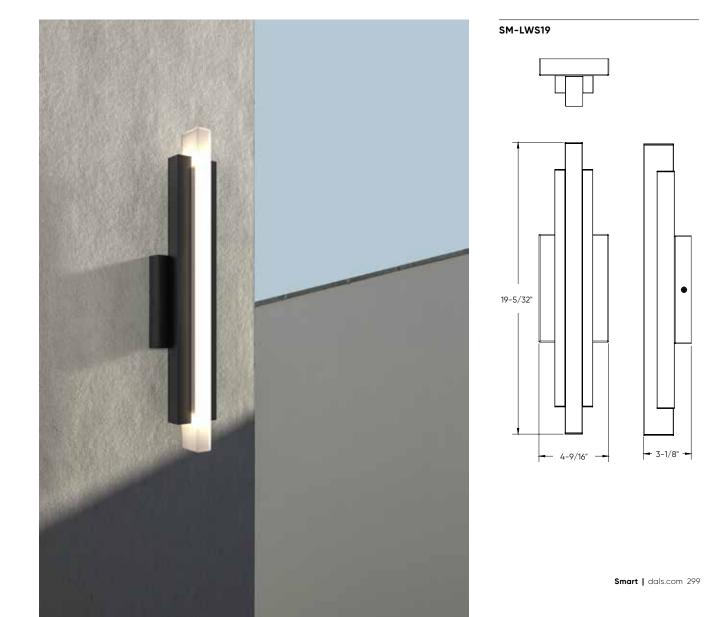


Axis digital table lamp

Enter the world of digital smart lighting with our dimmable LED Wi-Fi controlled devices that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K. Enjoy tuning the light strip to your liking by controlling individual segments to create the exact lighting you want, or select from a list of smooth animations to set the mood. For tranquility and peace of mind, easily control and manage your lighting remotely with the DALS Connect[™] app connected to your mobile device or through your preferred Al home assistant.








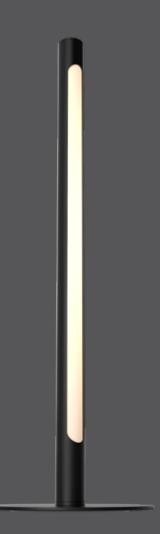

7 ₩ Finish ● B	360 lm K Black	80+	RGB + 2700 K – 6500 K Download the Dals Connect ap	120 V P
-	K Black		Download the Dals Connect ap	p
в	K Black			
lifespan 9	. Eleck		Complete don the App Store	works with Hery Google ks alexa tth alexa
				lifespan Remote access Compatible with Google Assistant and Amazon Alexa



SM-STTL20







Axis digital floor lamp

Enter the world of digital smart lighting with our dimmable LED Wi-Fi controlled devices that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K. Enjoy tuning the light strip to your liking by controlling individual segments to create the exact lighting you want, or select from a list of smooth animations to set the mood. For tranquility and peace of mind, easily control and manage your lighting remotely with the DALS Connect[™] app connected to your mobile device or through your preferred Al home assistant.







Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-STFL50	50"	14 W	720 lm	80+	RGB + 2700 K - 6500 K	120 V
Specifications		Finish			Download the Dals Connec	t app
Excellent color ren	dering	● Bł	Black		Wi-Fi - no hub needed	
Full color spectrun	n				Create groups	
2700K - 6500K in p	oure whites				Set schedules	
Create gradients					Remote access	
Preset animations					Compatible with Google	
Superior LED perfo	ormance and lifespan				Assistant and Amazon Ale	exa
Aluminum construe	ction					
Minimal heat emis	sion				WIFI	Hey Google
Dimmable through	n the Dals				Download on the App Store	
Connect app only					Gerrinon Google Play	works alexa
Over 50,000 hours	s of service life					
Suitable for dry loo	cations					
5-year warranty						

SM-STFL50





Ø7"



RGR smart

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need. The RGR Smart will add a touch of personality to your room with the help of our DALS Connect[™] App.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-RGR4WH	4"	14 W	700 lm	80+	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites Dimmable through the Dals Connect app only Minimal heat emission Aluminum construction Regressed light source Suitable for dry locations IC certification (suitable for direct contact with insulation) Air-tight certified as per ASTM E283-04 5-year warranty

Finish

O WH White

Accessories


SM-RGREXT108

108" extension for smart regressed lights


Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



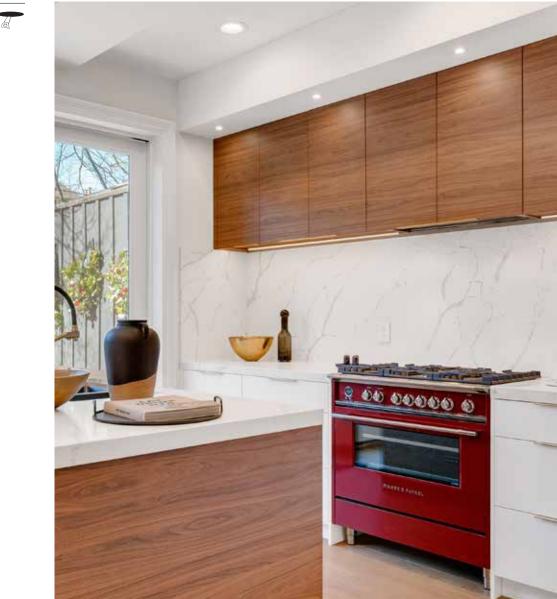





7" x 3" x 11⁄4"

Excel smart



Our smart LED panel light will be a great addition to any project. The sleek and minimal construction allows for the easiest of installations with the added bonus of a wide range of colors and settings made possible by the DALS Connect App[™].



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-PNL4WH	4"	10 W	600 lm	80+	RGB + 2700 K - 6500 K	120 V
SM-PNL6WH	6"	15 W	1000 lm	80+	RGB + 2700 K - 6500 K	120 V

Includes a junction box with integrated driver Over 50,000 hours of service life Full color spectrum 2700K - 6500K in pure whites Dimmable through the Dals Connect app only Minimal heat emission Aluminum construction Suitable for dry locations IC certification (suitable for direct contact with insulation) 5-year warranty

Finish

○ WH White

Accessories

REC-PT4-BB (SM-PNL4WH) 4" recessed panel trim in brushed brass

REC-PT4-BK (SM-PNL4WH) 4" recessed panel trim in black

REC-PT4-SN (SM-PNL4WH) 4" recessed panel trim in satin nickel

REC-SMPT6-BK (SM-PNL6WH) 6" recessed panel trim in black


SM-PNLEXT108 108" extension for smart recessed panel lights

Download the Dals Connect app


Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





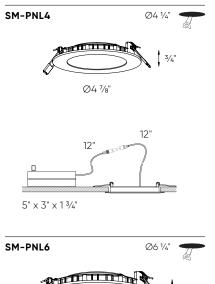

Ø6-7/8"



Delta smart



The ultra-slim design of our Smart ceiling fixture is the cornerstone of LED lighting technology. This flush mount emits a uniform and true light creating the ambient atmosphere you desire with the push of a button.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-FM08WH	8"	10 W	800 lm	80+	RGB + 2700 K - 6500 K	120 V
SM-FM14WH	14"	18 W	1400 lm	80+	RGB + 2700 K - 6500 K	120 V

Specifications Excellent color rendering Full color spectrum 2700K - 6500K in pure whites Superior LED performance and lifespan Minimal heat emission Dimmable through the Dals Connect app only Over 50,000 hours of service life Suitable for dry locations 5-year warranty

Finish


O WH White

Download the Dals Connect app


Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



SM-FM08WH



SM-FM14WH



Ø14"



A19 smart bulb



Enter the world of smart lighting with our array of dimmable LED Wi-Fi controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K. For tranquility and peace of mind, easily control and manage your lighting remotely with the DALS Connect[™] app connected to your mobile device or through your preferred AI home assistant.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-BLBA19	A-19	9 W	800 lm	80+	RGB + 2700 K - 6500 K	120 V

Specifications	Finish	Download the Dals Connect app
Excellent color rendering	O WH White	Wi-Fi - no hub needed
Full color spectrum		Create groups
2700K - 6500K in pure whites		Set schedules
Suitable for enclosed fixtures		Remote access
800 lm = 60W bulb equivalent		Compatible with Google
Dimmable through the Dals Connect app		Assistant and Amazon Alexa
Over 50,000 hours of service life		
Suitable for dry locations		
5-year warranty		



SM-BLBA19



BR30 smart



Enter the world of smart lighting with our array of dimmable LED Wi-Fi controlled bulbs that emit a full spectrum of vibrant colors or tunable pure whites ranging from 2700 to 6500 K. For tranquility and peace of mind, easily control and manage your lighting remotely with the DALS Connect[™] app connected to your mobile device or through your preferred AI home assistant.




Size	Watts	Delivered lumens	CRI	Color °T	Voltage
BR30	9 W	900 lm	80+	RGB + 2700 K - 6500 K	120 V
	Finish	I		Download the Dals Connect	арр
		BR30 9 W		BR30 9 W 900 lm 80+	BR30 9 W 900 lm 80+ RGB + 2700 K - 6500 K

Excellent color rendering	\bigcirc	WH White
Full color spectrum		
2700K - 6500K in pure whites		
Superior LED performance and lifespan		
Minimal heat emission		
Suitable for enclosed fixtures		
900 lm = 65W bulb equivalent		
Dimmable through the Dals Connect app		
Over 50,000 hours of service life		
Suitable for dry locations		
5-year warranty		

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



SM-BLBBR30





GU10 smart




Enter the world of smart lighting with our wide range of dimmable LED Wi-Fi controlled bulbs. With a full spectrum of vibrant colors and tunable pure whites ranging from 2700 to 6500 K, you can let your imagination flow. For tranquility and peace of mind, easily control and manage your lighting remotely with the new DALS Connect App[™] using your mobile device or preferred Al home assistant.




Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-BLBGU10	GU10	5.5 W	400 lm	80+	RGB + 2700 K - 6500 K	120 V

Specifications	Finish	Download the Dals Connect app
Excellent color rendering	O WH White	Wi-Fi - no hub needed
Full color spectrum		Create groups
2700K - 6500K in pure whites		Set schedules
Superior LED performance and lifespan		Remote access
Minimal heat emission		Compatible with Google
Dimmable through the Dals Connect app		Assistant and Amazon Alexa
Over 50,000 hours of service life		
Suitable for dry locations		
5-year warranty		Coogle Play

SM-BLBGU10







PAR20 smart



Enter the world of Smart lighting with our wide range of dimmable LED Wi-Fi controlled bulbs. With a full spectrum of vibrant colors and tunable pure whites ranging from 2700 to 6500 K, you can let your imagination flow. For tranquility and peace of mind, easily control and manage your lighting remotely with the new DALS Connect App[™] using your mobile device or preferred Al home assistant.



Model S	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-BLBPAR20	PAR20	6 W	500 lm	80+	RGB + 2700 K - 6500 K	120 V
Specifications		Finish			Download the Dals Connect app)
Excellent color rendering		🔾 wi	H White		Wi-Fi - no hub needed	
Full color spectrum					Create groups	
2700K - 6500K in pure wh	nites				Set schedules	
Superior LED performance				Remote access		

Minimal heat emission Dimmable through the Dals Connect app

Over 50,000 hours of service life Suitable for dry locations

5-year warranty

Compatible with Google Assistant and Amazon Alexa



SM-BLBPAR20





Smart tape

DRY CHANGE COLORS

Technology at its finest, with these Wi-Fi LED Tape kits, you will have full control of your lighting design through your smart phone. Change colors at will, set schedules, adjust light intensity – anything's possible.

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-TAP1M	1m	5.5 W	400 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-TAP3M	3m	14 W	950 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-TAP5M	5m	17 W	1200 lm	80+	RGB + 2700 K - 6500 K	12 V

Excellent color rendering Full color spectrum 2700K - 6500K in pure whites Superior LED performance and lifespan Minimal heat emission Dimmable through the Dals Connect app Over 50,000 hours of service life 1x 6" reconnect accessory included per meter (3m=3x / 5m=5x) Suitable for dry locations 5-year warranty

Accessories

SM-TAPACCWM Wi-Fi module controller & remote for smart indoor tape

SM-TAPACCY 6 in. "Y"-Splitter for smart indoor tape

SM-TAPEXT24 24 in. extension for smart indoor tape

SM-TAPEXT60 60 in. extension for smart indoor tape


Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





SM-TAP1M	1m (39")
SM-TAP3M	3m (118")
SM-TAP5M	5m (196")

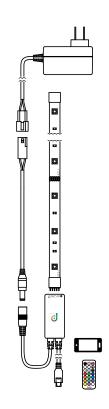

Smart outdoor tape

Bringing fun outdoors is made easy with our smart outdoor tape and the new DALS Connect App™.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-OTP24FT	24'	15 W	1500 lm	80+	RGB + 2700 K - 6500 K	24 V
SM-OTPACC8FT	8'	5 W	500 lm	80+	RGB + 2700 K - 6500 K	24 V

Suitable for wet locations Excellent color rendering Full color spectrum 2700K - 6500K in pure whites Superior LED performance and lifespan Minimal heat emission Dimmable through the Dals Connect app Over 50,000 hours of service life 5-year warranty

Accessories

SM-OTPACC8FT 8' RGB+CCT outdoor tape extension SM-OTPACCWM Wi-Fi module controller & remote for

smart outdoor tape

SM-OTPACCY24 24 in. "Y" splitter for smart outdoor tape

SM-OTPEXT60 60 in. extension for smart outdoor tape

Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa






Smart linear



When designing a linear, we are looking for flexibility and ease of installation. This is why we are introducing the SMART linear. Choose from an array of colors and settings using our DALS Connect[™] App.

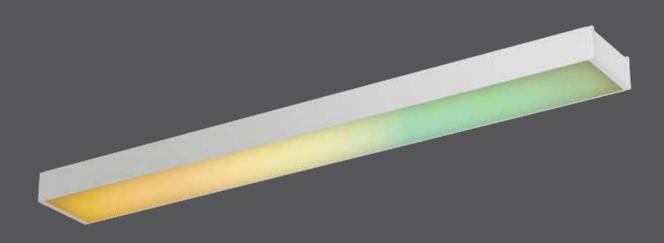

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-UCL12	12″	6 W	400 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-UCL24	24"	12 W	800 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-UCL36	36"	18 W	1200 lm	80+	RGB + 2700 K - 6500 K	12 V

Wi-Fi - no hub needed

Full color spectrum

Minimal heat emission

Excellent color rendering

2700K - 6500K in pure whites

or supplied infrared remote

36W plug-in driver included

Remote control included

Suitable for dry locations

5-year warranty

Over 50,000 hours of service life

Superior LED performance and lifespan

Dimmable through the Dals Connect app

Finish

O WH White

Accessories

SM-UCLWM Wi-Fi module controller and remote for smart linears

SM-UACCY24

24" Y-splitter for smart linears and pucks

SM-UEXT24

24" extension for smart linears and pucks


SM-UEXT60

60" extension for smart linears and pucks

Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa




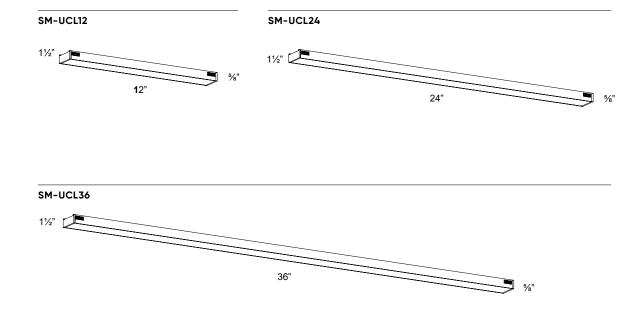

Smart puck



Enter the world of Smart lighting with our dimmable LED Wi-Fi controlled pucks. With a full spectrum of vibrant colors and tunable pure whites ranging from 2700 K to 6500 K, you can let your imagination flow. For tranquility and peace of mind, easily control and manage your lighting remotely with the new DALS Connect App[™].

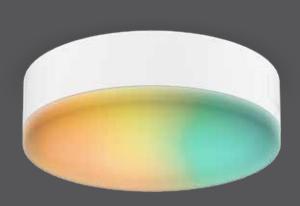

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-UP1	1 x Ø2.75"	2.3 W	110 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-UPK3	3 x Ø2.75"	11 W	330 lm	80+	RGB + 2700 K - 6500 K	12 V
SM-UPK5	5 x Ø2.75"	18 W	550 lm	80+	RGB + 2700 K - 6500 K	12 V

12 V plug-in driver, Wi-Fi controller, and

5 pucks (SM-UPK3, SM-UPK5)

2700K - 6500K in pure whites

or supplied infrared remote

control sold separately.

Over 50,000 hours of service life

Excellent color rendering

Full color spectrum

Minimal heat emission

5-year warranty

Note

remote control included with kits of 3 and

Superior LED performance and lifespan

Dimmable through the Dals Connect app

Model **SM-UP1** is a single puck light only. 12V driver, Wi-Fi controller and remote

Finish

O WH White

Accessories

SM-UPKWM Wi-Fi module controller and remote

for smart pucks
SM-UACCY24

24" Y-splitter for smart pucks and linears

SM-UEXT24 24" extension for smart pucks and linears

SM-UEXT60 60" extension for smart pucks and linears

Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa



SM-UP1






Smart wall controller

Transform any house into an easy-to-use smart home with our new smart wall controller and the DALS Connect App[™]. Four buttons to program and fully customize your own scenes. Convenience at your fingertips.





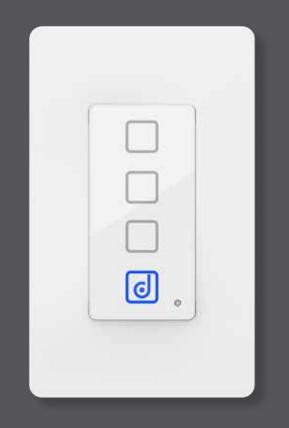

Model	Size	Programmable	Stand-by mode	Maximum load	Voltage
SM-WLCT	4 1⁄2"	\checkmark	\checkmark	500 W	120 V

Indoor use only Control any Dals Connect device from this wall controller 4 preset buttons to customize your own scenes for specific devices Control from the wall switch or with the Dals Connect app Stand-by mode, always connected even if the lights are off 5-year warranty

Note

Requires a neutral wire. Works in a singlepole setup only. Secured 2.4 GHz wireless network required.

Finish

O WH White


Download the Dals Connect app


Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





SM-WLCT






Smart plug

The DALS Smart Plug lets you control your lights, fans, coffee makers, and more. All you need is the easy-to-use DALS Connect App[™] or a voice-enabled device like Amazon Echo, or the Google Assistant. With multiple smart plugs you can create groups, set timers and make your very own smart home.



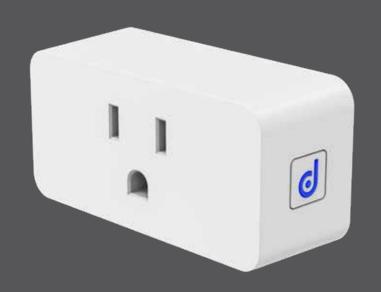

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SM-PLUG	2-3/4"	-	-	-	-	120 V

Specifications

Finish

WH White


Slim design allows two plugs on the same wall outlet Control electric "non-smart" appliances & devices Easily manage devices through the Dals Connect app Maximum load of 1200 watts (10 amps) Secured 2.4 Ghz wireless network required Suitable for dry locations 5-year warranty Download the Dals Connect app


Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





SM-PLUG






Smart dimmer switch

In need of a dimmer but not sure which one to get? Look no further. With the DALS Connect[™] app, you will be able to create groups, set timers and much more. This is a great way to get to know smart home technologies and perhaps convince you to come and join us on the smart side with our ever growing smart product line.





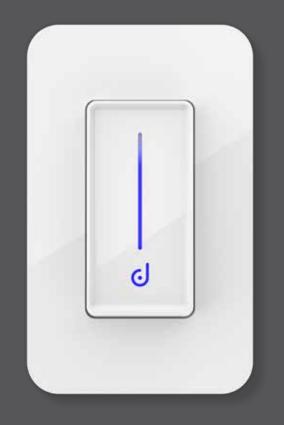

Model	Size	Dimmer	Scheduling	Sunrise & Sunset setting	Alexa & Google Assistant compatible	Voltage
SM-DIMSW	4 1⁄2"	\checkmark	\checkmark	\checkmark	\checkmark	120 V

Indoor use only

Control from the wall switch or with

the Dals Connect app LED brightness indicator

Touch-sensitive slide dimmer

Works with all "non-smart" standard lights

Dimming type: TRIAC Edge cut

Inductive load (LED-CFL): 250W max.

Resistive load (incan.): 430W max.

Standby power: 1W

5-year warranty

Finish

O WH White

Note

Does not work with Dals smart lights. Requires a neutral wire. Works in a singlepole setup only. Secured 2.4 GHz wireless network required.


Download the Dals Connect app

Wi-Fi - no hub needed Create groups Set schedules Remote access Compatible with Google Assistant and Amazon Alexa





SM-DIMSW







Smart | dals.com 333

Accessories

	SMART O	UTDOOR TAPE ACC	ESSORIES	
Model		Compatibility	Finish	Specification
SM-OTPACC8FT		SM-OTP24FT	White	• 8 ft. RGB+CCT Outdoor LED Tape Light Extension
SM-OTPACCWM	5	SM-OTP24FT	Black	• DALS Connect Wi-Fi Module Controller & Remote for Smart Outdoor Tape
SM-OTPACCY24		SM-OTP24FT	Black	• DALS Connect 24 in. "Y" Splitter for Smart Outdoor Tape
SM-OTPEXT60		SM-OTP24FT	Black	• DALS Connect 60 in. Extension for Smart Outdoor Tape

SMART RECESSED ACCESSORIES					
Model		Compatibility	Finish	Specification	
REC-SMPT6-BK	0	SM-PNL6	Black	• 6 in. trim for SM-PNL6	
REC-PT4-XX	000	SM-PNL4	Brushed Brass Black Satin Nickel	• 4 in. trim for SM-PNL4	
SM-PNLEXT108	la l	SM-PNL4 SM-PNL6	White	• 108 in. Extension for Smart Recessed Panel Lights	
SM-RGREXT108	<i>i</i>	SM-PNL4 SM-PNL6	White	• 108 in. Extension for Smart Regressed Lights	

	SMA	ART INDOOR TAPE ACCE	SSORIES	
Model		Compatibility	Finish	Specification
SM-TAPACCWM		SM-TAP1M SM-TAP3M SM-TAP5M	White	• Wi-Fi Module Controller & Remote for Smart Indoor Tape
	ST. ALINESS	SM-TAP1M SM-TAP3M SM-TAP5M	White	• 6 in. Y-Splitter for Smart Indoor Tape
SM-TAPEXT24		SM-TAP1M SM-TAP3M SM-TAP5M	White	• 24 in. Extension for Smart Indoor Tape
SM-TAPEXT60		SM-TAP1M SM-TAP3M SM-TAP5M	White	• 60 in. Extension for Smart Indoor Tape

	SMAR	RT PUCK AND LINEAR ACCES	SORIES	
Model		Compatibility	Finish	Specification
SM-UPKWM	0	SM-UP1 SM-UPK3 SM-UPK5	White	Wi-Fi Module Controller and Remote for Smart Pucks
	0	SM-UCL12 SM-UCL24 SM-UCL36	White	• Wi-Fi Module Controller and Remote for Smart Linears
		SM-UPK1/3/5 SM-UCL12/24/36	White	• 24 in. Y-splitter for Smart Linears and Pucks
SM-UEXT24	1	SM-UPK1/3/5 SM-UCL12/24/36	White	• 24 in. Extension for Smart Linears and Pucks
SM-UEXT60	1	SM-UPK1/3/5 SM-UCL12/24/36	White	• 60 in. Extension for Smart Linears and Pucks

dals

Canada

80, blvd. de la Seigneurie, East Blainville, Quebec J7C 4N1 450 430 1818

U.S.A 4383, NW 124th Ave., Coral Springs, Florida 33065

Customer service

877 430 1818

For information regarding distributors and points of sale please visit our website dals.com or email: info@dals.com



