

Excel

LED panel lights are more accessible than ever before. Their sleek and minimal construction, combined with a two-hour fire-rated housing, offers a blend of security and modern clean design.

NEW WET ENERGY STAR AIR TIGHT ETL US Intertek IC RATED T24 JA8 CERTIFIED

2700k 3000k 3500k 4000k 5000k COLOR TEMPERATURE WARM DIMMING* FIRE RATED**



*Model 5004-DW only

**Models 5004-FR-CC, 5006-FR-CC only

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
5004-DW*	4"	11 W	850 lm	80	3000 K - 2200 K	120 V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming
5004-FR-CC**	4"	11 W	825 lm		2700, 3000, 3500, 4000, 5000 K		
5006-FR-CC**	6"	14 W	1230 lm				

*Dim-to-warm technology dims from 3000 K to 2200 K

**2-hour fire-rated without additional housing or hardware, in accordance with UL 263, ASTM E119, and CAN ULC S101

Specifications

Every fixture includes a junction box with an integrated driver
 Over 35,000 hours of service life
 Can be daisy chained
 Superior LED performance and lifespan
 Smooth 360° wide spread
 Minimal heat emission
 Frosted lens
 Edge lit technology
 Aluminum construction
 Switch-selectable CCT: 2700 K/3000 K/3500 K/4000 K/5000 K
 Very low profile
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

○ **WH** White

Accessories

REC-TRIM4-BK (5004-DW only)

4" recessed panel trim in black

REC-TRIM4-GD (5004-DW only)

4" recessed panel trim in gold

REC-TRIM4-SN (5004-DW only)

4" recessed panel trim in satin nickel

REC-3K-EXT8FT (5004-DW only)

8-foot extension cable

REC-3K-EXT20FT (5004-DW only)

20-foot extension cable

REC-CC-EXT8FT (5004/6-FR only)

8-foot extension cable

REC-CC-EXT20FT (5004/6-FR only)

20-foot extension cable

RFP-46 (5004, 5006)

Rough-in plate

RFP-UNI (5004, 5006)

Universal rough-in plate




Multi-voltage ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.



Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

5004-DW

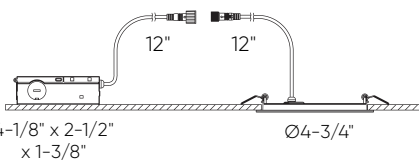

5004-FR

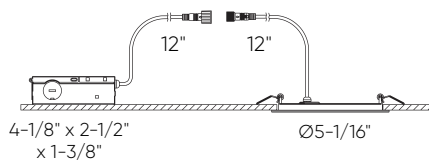

5006-FR

