

Core


The heart of your connected landscape system. By adding the Core, you unleash the full potential of smart lighting.



Model


DCP-TR60

60W low-voltage smart transformer

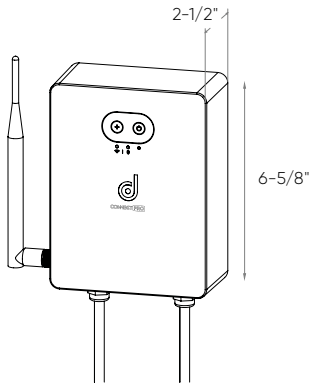


DCP-TR200

200W low-voltage smart transformer

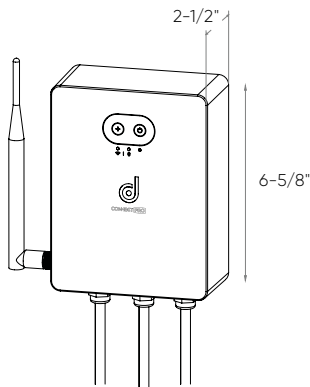

DCP-TR300

300W low-voltage smart transformer

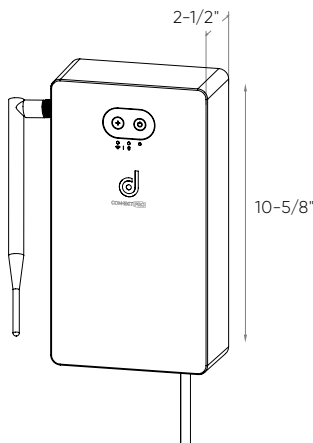

Specifications

Constant voltage mode power supply
Protection: short circuit / Over voltage
Input voltage: 120VAC 60Hz
Output voltage: 24V DC
Output Power: 60W, 200W, and 300W
Maximum recommended load: 80%
Operating temperature: -30°C to 45°C
Control with the Dals Connect app
Integrated Hub
Number of supported smart devices per hub: 128
Can be controlled locally (without internet)
Works with Dals Connect PRO devices
Secure connection
Can be used with a voice-controlled assistant
Supports Wi-Fi and BLE Mesh protocols
5-year warranty

Finish

BK Black

Download the Dals Connect app

Create groups
Set schedules
Remote access
Compatible with Google Assistant and Amazon Alexa

