

ORBIT

A swiveling, low profile light designed to brighten a number of exterior applications. Ideal for walkways and flower beds but fits comfortably in any environment. Add a second or third fixture together and create a multi-head device.




DCP-SPT6



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-SPT6	6"	10 W	540 lm	90	RGB + 2200 K - 4000 K	24 V DC



DCP-SPT6

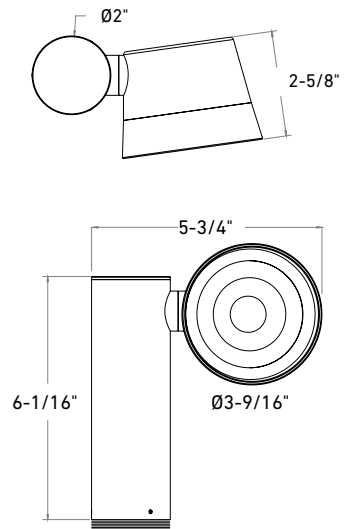

Specifications

Full color spectrum
 2200K - 4000K in pure whites
 120° frosted lens included
 40° beam angle
 Up to three Orbit fixtures can be combined
 Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
 5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK
 60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK
 200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK
 300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
 Set schedules
 Remote access*
 Compatible with Google Assistant and Amazon Alexa*



* Core needed

Accessories

DCP-RMCT
 Smart remote

DCP-PTR36
 Plug-in driver

DCP-ACC-MS12
 12" metal ground stake

DCP-ACC-MS06
 6" metal ground stake

DCP-ACC-MB
 Mounting bracket

DCP-SPTTEXT14
 14" extension tube

LCBL-50-16, LCBL-100-16
 50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14
 50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12
 100 or 200 feet of 12-gauge low-voltage wiring