



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL RGR1-CC

NAME RGR

1" round regressed downlight

When choosing a recessed fixture, eliminating glare is a priority. The unique positioning of the LED module in this series of downlights will meet that important need.


PROJECT

TYPE


DATE

QTY

NOTES

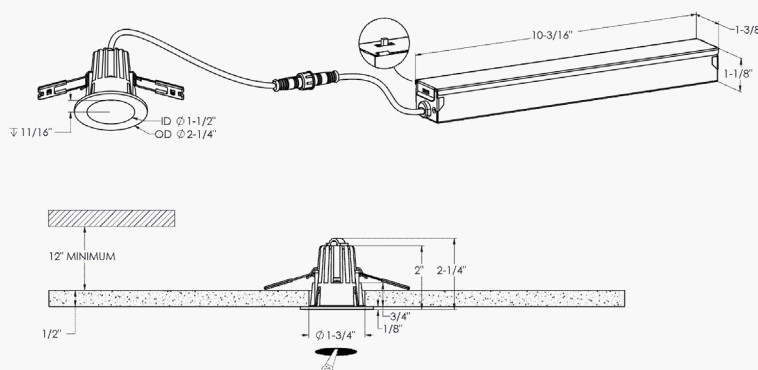

LIGHT DISTRIBUTION

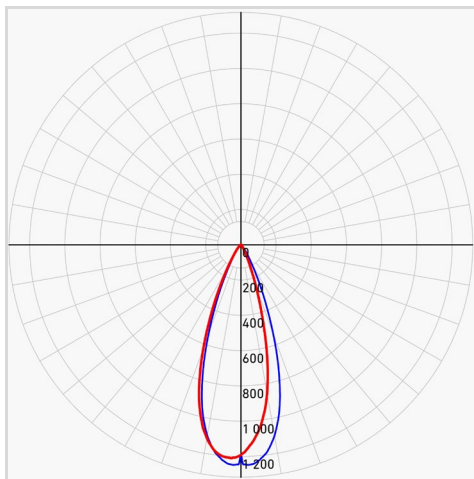

*Lumen output measured at 3000k

QUICK SPECS

Size	1"
Watts (W)	6
Delivered lumens*	450
CRI	90
Voltage (v)	120
Beam angle (deg)	40
Cut hole size (in)	1-3/4"
FT rating	FT6
UGR	14.8
Binning	3 SDCM
LED model	COB
Color temperature	2700K/3000K/3500K/4000K/5000K
Certifications	ETL, FCC, ICES, JA8/T24, IC, ASTM E283-04

ELECTRICAL DETAILS

Environment	Wet
Location	Indoor/Outdoor
Operating temp. (° C)	-20 to 40
IP rating	IP65
Input voltage (V)	120
Output voltage (V)	32-48
Output current (mA)	141
Power factor (%)	90
Driver type	Constant current
THD	≤ 20%
Lifespan (hrs)	50 000

ORDERING GUIDE

RGR1-CC	-	Voltage	-	Finish
		BLANK - 120v, TRIAC		WH - White
		V - 120-277-347V, 0-10v		BK - Black

CONSTRUCTION

Lens material	Acrylic
Optic type	Optical lens
Finish type	Matte
Housing material	Aluminum

