

NOTCH


The Notch series of recessed downlights is characterized by a deep-set LED position which greatly reduces glare, neatly packaged in a price-conscious solution to general lighting.



- WET
- LOW-GLARE
- AIR TIGHT
- IC**
RATED
- T24**
JA8
CERTIFIED
-



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
DRR2-CC	2"	9 W	500 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
DRR4-CC	4"	11 W	800 lm			or
DRR6-CC	6"	14 W	1000 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)

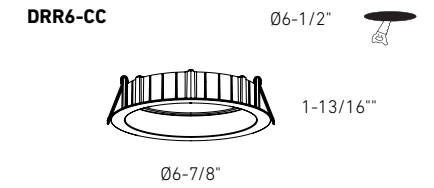

Specifications

Every fixture includes a junction box with an integrated driver

- Can be daisy chained
- Smooth 360° wide spread
- 100° beam angle
- Frosted lens
- Edge lit technology
- Switch-selectable CCT
- 5-year warranty

Finish

- WH** White

Accessories

- RFP-23**
Rough-in plate (DRR2)
- RFP-46**
Rough-in plate (DRR4, DRR6)
- RFP-UNI**
Universal rough-in plate (DRR4, DRR6)
- DRR4-TRIM-BK**
4" recessed panel trim in black
- DRR4-TRIM-SBA**
4" recessed panel trim in sandblasted aluminum
- DRR6-TRIM-BK**
6" recessed panel trim in black
- DRR6-TRIM-SBA**
6" recessed panel trim in sandblasted aluminum
- REC-CC-EXT8FT**
8-foot extension cable
- REC-CC-EXT20FT**
20-foot extension cable

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.