

0 0 0 0 0 2700k 3000k 3500k 4000k 5000k

COLOR TEMPERATURE

WET

DARK SKY FRIENDLY

**((●))** PHOTOCELL

> c E us Intertek


# SHIELD

These 5" and 7" dark-sky friendly wall fixtures offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DSWC05-CC	5"	16 W	1200 lm	90	2700, 3000, 3500, 4000, 5000 K	120 V
DSWC07-CC-V	7"	24 W	2000 lm	90	2700, 3000, 3500, 4000, 5000 K	V: 120 / 277 / 347V 0-10V dimming

### DSWC05-CC




#### DSWC07-CC-V





#### Specifications

Die-cast aluminum housing Switch-selectable CCT Integrated photocell for automatic lighting control Integrated dimmable driver Installs in a standard electrical junction box 5-year warranty

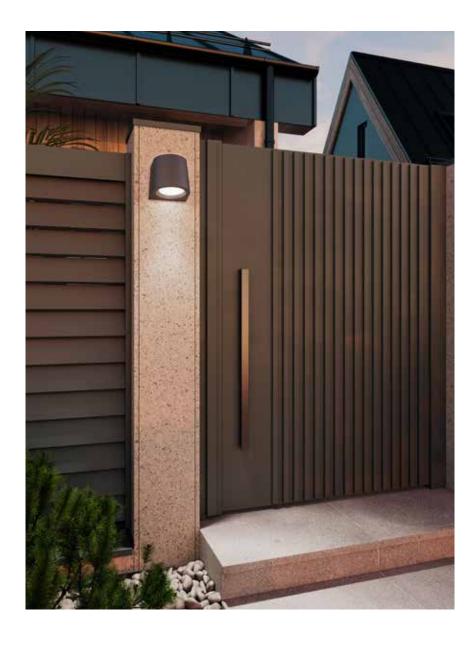

## Finish

**BK** Black

#### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.