





NEW

BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.




T24
JA8
CERTIFIED

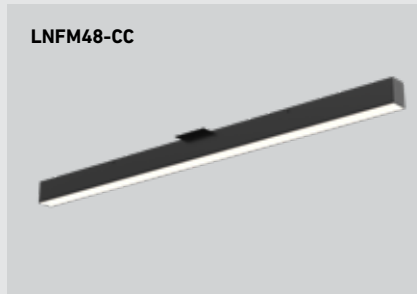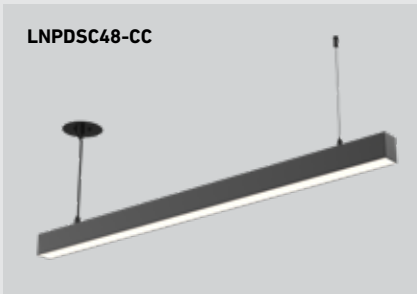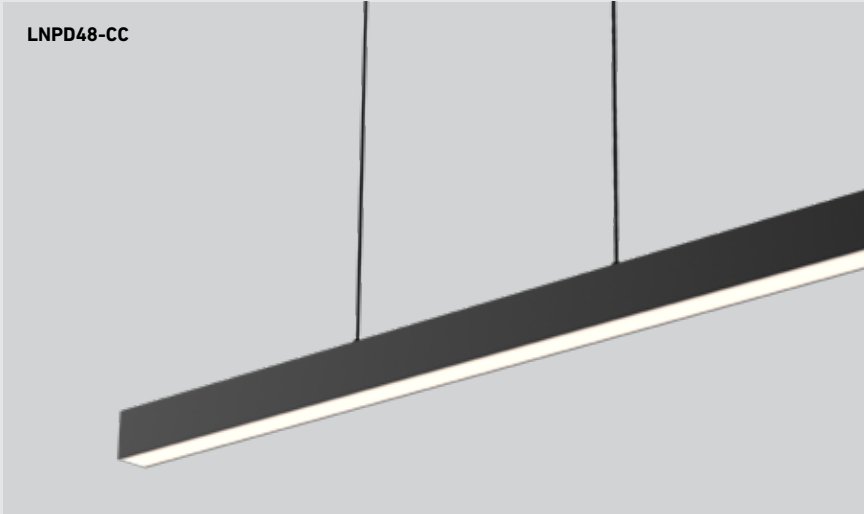


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options ⚡
LNP48-CC	48"	40 W	2805 lm	90	2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LNP48-CC	48"	40 W	2805 lm			or
LNF48-CC	48"	40 W	3000 lm			V: 120 / 277 / 347V 0-10V dimming (Check for availability)


LNPD48-CC

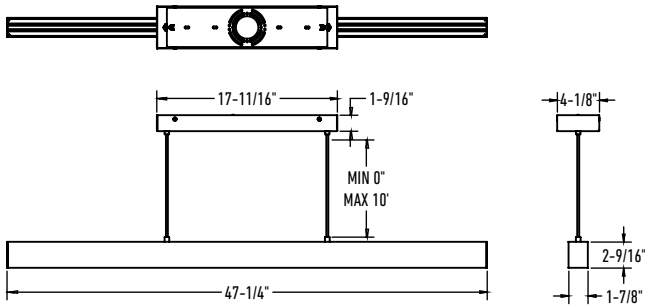

LNFM48-CC

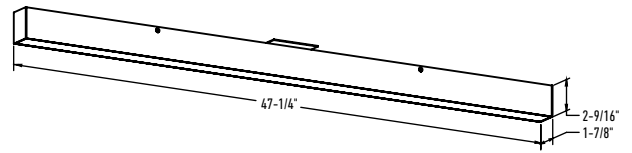

LNPDSC48-CC

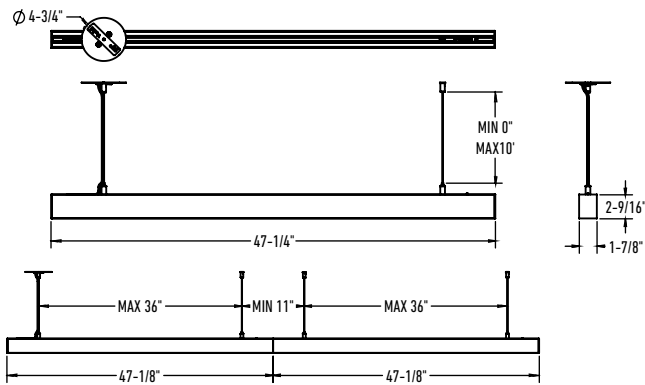

More from this family



LNR24-CC
pg. 50



LNR48-CC
pg. 50

Specifications

- Switch-selectable CCT
- Unique 20% up/ 80% down light output (LNPD48-CC, LNPDSC48-CC only)
- Multiple fixtures can be linked together
- LNFM48 can be mounted on 4" octagon junction box or directly on the ceiling
- Adjustable height up to 10 feet
- Aluminum housing which serves as a highly efficient heat sink
- Integrated dimmable driver
- Canopy mount on 4" octagonal junction box
- 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

LNACC-L16FT

16-foot lens for Boulevard series pendants, flush mounts and recessed linears

Multi-voltage (V) ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.