

Boulevard flush mount

The Boulevard, an architectural flush mount lighting fixture, can be installed in a wide range of commercial and residential environments. Add depth to ceiling planes with a visible separation, or seamlessly daisy-chain multiple units to create dramatic effects

NEW


2700k 3000k 3500k 4000k 5000k

COLOR TEMPERATURE

DRY

ETL Intertek

T24 JA8 CERTIFIED

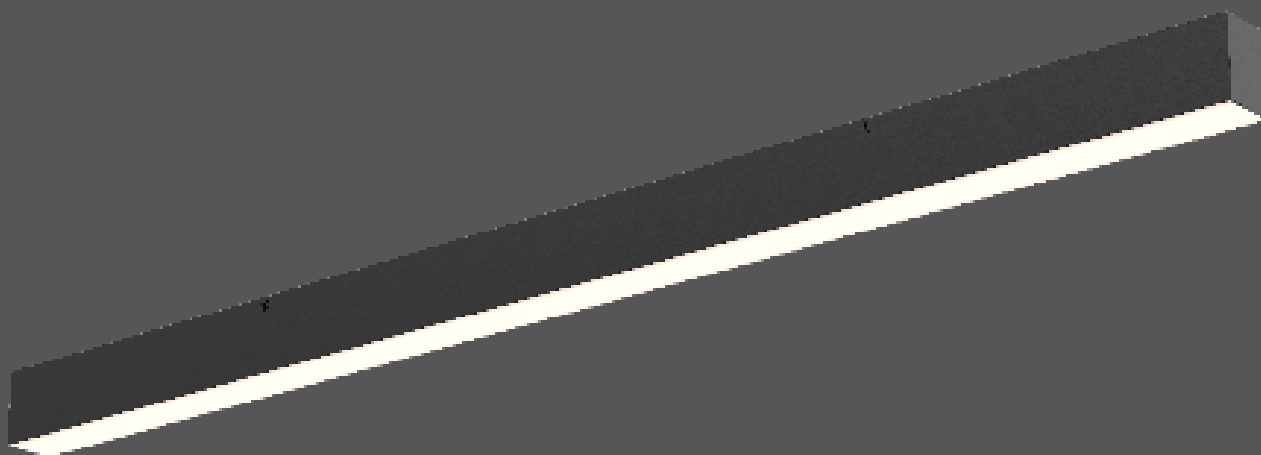

| Model | Size | Watts | Delivered lumens | CRI | Color °T | Standard voltage | Multi-voltage ⚡ |
|------------------|------|-------|------------------|-----|--------------------------------|---------------------|-------------------------------------|
| LNFM48-CC | 48" | 37 W | 2500 lm | 90 | 2700, 3000, 3500, 4000, 5000 K | 120V, Triac dimming | MV: 120 / 277 / 347V, 0-10V dimming |

Specifications

Can be daisy chained
 Over 50,000 hours of service life
 Switch-selectable CCT: 2700 K/3000 K/3500 K/4000 K/5000 K
 Integrated dimmable driver
 Suitable for dry locations
 Canopy mount on 4" octagon junction box
 Refer to website for dimmer compatibility
 5-year warranty

Finish

- **BK** Black
- **WH** White

Multi-voltage ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.



LNFM48-CC

