


Beam

This sleek design truly utilizes the best features of LED technology. We are now able to create a unique form factor that will project the perfect amount of light.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
SPD48-CC	48"	27 W	1530 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming
SPD72-CC	72"	54 W	2300 lm				

Specifications

Over 50,000 hours of service life
Adjustable cable length up to 10 feet
Switch-selectable CCT: 2700 K/3000 K/
3500 K/4000 K/5000 K
Frosted lens
Aluminum die-cast housing which serves as
a highly efficient heat sink
Superior color consistency
Integrated dimmable driver
Suitable for dry locations
Refer to website for dimmer compatibility
5-year warranty


Finish

- **BK** Black
- **WH** White

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

SPD48-CC

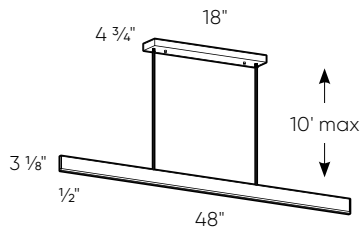

SPD72-CC

