

NEW

# SHIELD

These 5" and 7" dark-sky friendly wall fixtures offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.



COLOR TEMPERATURE



WET



DARKSKY APPROVED



PHOTOCELL



DSWC05-CC

DSWC07-CC-V




**Photocell**

The photocell feature automatically adjusts to changing light conditions, providing energy-efficient illumination without requiring manual control.


Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DSWC05-CC	5"	16 W	1200 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V
DSWC07-CC-V	7"	24 W	2000 lm	90	2200, 2700, 3000, 3500, 4000 K	V: 120 / 277V 0-10V dimming

\*at 3000K or lower CCT

### DSWC05-CC

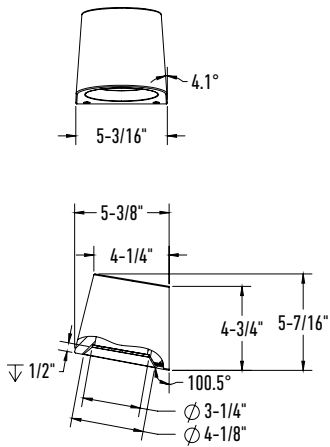

### DSWC07-CC-V

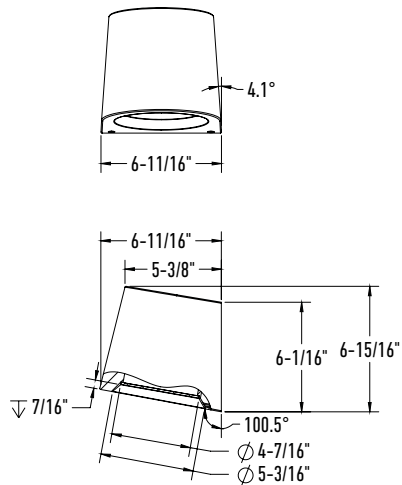

### Specifications

Die-cast aluminum housing  
Switch-selectable CCT  
Integrated photocell for automatic lighting control  
Integrated dimmable driver  
Installs in a standard electrical junction box  
BUG rating: B1-U0-G0  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.