

0 0 0 0 0 2200k 2700k 3000k 3500k 4000k

COLOR TEMPERATURE

WET

DARK SKY FRIENDLY

((●)) PHOTOCELL

> c E us Intertek


SHIELD

These 5" and 7" dark-sky friendly wall fixtures offer focused, energy-efficient illumination while minimizing light pollution, making them ideal for environmentally conscious outdoor spaces.





Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DSWC05-CC	5"	16 W	1200 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V
DSWC07-CC-V	7"	24 W	2000 lm	90	2200, 2700, 3000, 3500, 4000 K	V: 120 / 277 / 347V 0-10V dimming

DSWC05-CC




DSWC07-CC-V





Specifications

Die-cast aluminum housing Switch-selectable CCT Integrated photocell for automatic lighting control Integrated dimmable driver Installs in a standard electrical junction box 5-year warranty

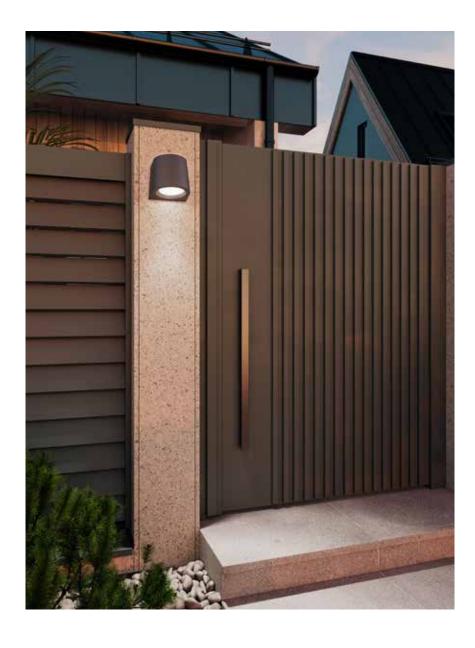

Finish

BK Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.