


0 0 0 0 0 2700k 3000k 3500k 4000k 5000k

COLOR TEMPERATURE

# BOULEVARD

The Boulevard series, a linear modular light fixture perfect for general office, home, and shop illumination. Can be interconnected to produce striking visual effects.

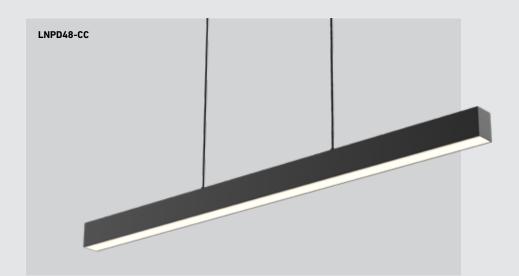









Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage options 🖡
LNPD48-CC	48"	40 W	2805 lm	90	0 2700, 3000, 3500, 4000, 5000 K	120V TRIAC dimming
LNPDSC48-CC	48"	40 W	2805 lm	4000	4000, 5000 K	
LNFM48-CC	48"	40 W	3000 lm			or

V: 120/277/347V 0-10V dimming (Check for availability)


# LNPD48-CC



## LNFM48-CC



### LNPDSC48-CC



### Specifications

5-year warranty

Switch-selectable CCT Unique 20% up/ 80% down light output (LNPD48-CC, LNPDSC48-CC only) Multiple fixtures can be linked together LNFM48 can be mounted on 4" octagon junction box or directly on the ceiling Adjustable height up to 10 feet Aluminum housing which serves as a highly efficient heat sink Integrated dimmable driver Optional round plate included to conceal the junction box

### Finish



# Accessories

### LNACC-L16FT

16-foot lens for Boulevard series pendants, flush mounts and recessed linears

#### More from this family



LNR24-CC pg. 50 LNR48-CC pg. 50

### Multi-voltage (V) 🖡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALS representative for additional information and to confirm availability.

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALS representative for more information.