


STOCKING GUIDE

877.430.1818
info@dals.com
dals.com

2025 /26

dals

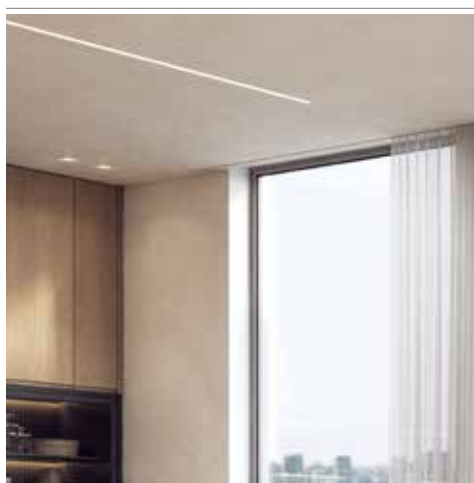

How to Use This Guide

Quick Ordering Process

1. **Browse the Catalog**

Look through the catalog to find the products you need. Products are organized by category for easy navigation.
2. **Product Details**

Each product listing includes a description and simplified specifications. For more details, visit our website at **dals.com**.
3. **Ordering Information**

Use the product codes provided to place your order. These codes are unique to each item and ensure accuracy.
4. **Order Placement**

Orders can be emailed to us at orders@dals.com or through your local representative. To find a representative in your area, please visit our website at **dals.com/where-to-buy**.
5. **Confirmation**

After placing your order, you will receive an order confirmation and estimated delivery time. All products listed in this guide are stocked and ready for immediate shipment.

Tips for a Smooth Ordering Experience

1. **Check Stock Levels**

Although our catalog lists stocked items, it's good practice to confirm availability for large orders.
2. **Use Product Codes**

Always use the product codes when placing orders to avoid any confusion or delays.
3. **Contact Support**

If you have any questions, our customer support team is ready to help. Contact details are on the following page of this guide.

Order Format
When placing an order, please use the following format:
Model Number - Finish Color.
This ensures that you receive the correct product with the desired finish.

Example Order:
Model Number: 5003-CC
Finish Color: White (WH)
Order Code: 5003-CC-WH

Our Promise to You

We're committed to delivering high-quality lighting solutions with fast, reliable service. With our extensive stock, you'll get the products you need – exactly when you need them.

Contact Information and Support

Sales & Customer Support

Our dedicated team is here to assist you with your orders and inquiries. Please reach out to us through any of the following methods.

- 1. Phone**

1-877-430-1818
Monday to Friday,
8:30 AM – 5 PM EST.
- 2. Email**

info@dals.com
We respond to emails
within 24 hours.
- 3. Online Chat**

Visit our website at
dals.com for live
chat support. Available
during business hours.

Feedback

We value your feedback. Let us know about your experience and how we can improve our service.

Feedback Form: Available on our website under the **Contact** section.
Email: info@dals.com

Office Locations

- 1. Canada**

80, boul. de la Seigneurie E.
Blainville, Quebec J7C 4N1
Phone: 1-877-430-1818
- 2. USA**

4383, NW 124th Ave.
Coral Springs, Florida 33065
Phone: 1-877-430-1818



Recessed Collection



	Access	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	2003	3 in. Panel Light	120V	6W	400LM	3000K	
	2004	4 in. Panel Light	120V	9W	600LM	3000K	
	2006	6 in. Panel Light	120V	11W	800LM	3000K	

	Excel	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	5003-CC	3 in. Round Panel Light	120V	8W	600LM	5CCT*	 
	5004-CC	4 in. Round Panel Light	120V	11W	800LM	5CCT*	  
	5004-CC-V ⚡	4 in. Round Multi-Voltage Panel Light with 0-10V Dimming	120 / 277 / 347V	11W	800LM	5CCT*	
	5004-DW ⚡	4 in. Round Warm Dimming Panel Light	120V	11W	850LM	2.2-3K	
	5004-FR-CC 🔥	4 in. Round Fire-Rated Panel Light	120V	11W	825LM	5CCT*	
	5004SQ-CC	4 in. Square Panel Light	120V	11W	800LM	5CCT*	 
	5005-CC	5 in. Round Panel Light	120V	12W	900LM	5CCT*	
	5006-CC	6 in. Round Panel Light	120V	14W	1100LM	5CCT*	 
	5006-CC-V ⚡	6 in. Round Multi-Voltage Panel Light with 0-10V Dimming	120 / 277 / 347V	14W	1100LM	5CCT*	
	5006-FR-CC 🔥	6 in. Round Fire-Rated Panel Light	120V	14W	1230LM	5CCT*	

	Etch	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DDP4-CC	4 in. Regressed Down Light	120V	15W	1000LM	5CCT*	
	DDP6-CC	6 in. Regressed Down Light	120V	20W	1500LM	5CCT*	

	Notch	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DRR2-CC	2 in. Regressed Panel Light	120V	9W	500LM	5CCT*	 
	DRR4-CC	4 in. Regressed Panel Light	120V	11W	800LM	5CCT*	
	DRR4-CC-V ⚡	4 in. Multi-Voltage Regressed Panel Light with 0-10V Dimming	120 / 277 / 347V	11W	800LM	5CCT*	
	DRR6-CC	6 in. Regressed Panel Light	120V	14W	1000LM	5CCT*	
	DRR6-CC-V ⚡	6 in. Multi-Voltage Regressed Panel Light with 0-10V Dimming	120 / 277 / 347V	14W	1000LM	5CCT*	



	Pivot	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	F6M2-CC	2 in. Flat Gimbal Light	120V	7W	500LM	5CCT*	● BK ● WH
	F6M3-CC	3 in. Flat Gimbal Light	120V	6W	570LM	5CCT*	● BK ● SN ● WH
	F6M4-CC	4 in. Flat Gimbal Light	120V	9W	800LM	5CCT*	● BK ● SN ● WH
	F6M4-3K	4 in. Flat Gimbal Light, 3000K	120V	9W	740LM	3K	● BK ● SN ● WH
	F6M4-CC-V ⚡	4 in. Multi-Voltage Flat Gimbal Light with 0-10V Dimming	120 / 277 / 347V	9W	800LM	5CCT*	● WH
	F6M4SQ-CC	4 in. Square Flat Gimbal Light	120V	9W	800LM	5CCT*	● BK ● WH
	F6M4-CC-DUO	4 in. Double Square Flat Gimbal Light	120V	18W	1475LM	5CCT*	● BK ● SN ● WH
	F6M4-CC-TRIO	4 in. Triple Square Flat Gimbal Light	120V	27W	2520LM	5CCT*	● BK ● SN ● WH
	F6M6-CC	6 in. Flat Gimbal Light	120V	14W	1050LM	5CCT*	● BK ● SN ● WH



	Revolve	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	GBR35-CC	3.5 in. Round Regressed Gimbal	120V	12W	860LM	5CCT*	● BK ● WH
	GBR35-DW ●	3.5 in. Round Warm Dimming Regressed Gimbal	120V	12W	825LM	2.2-3K	● WH
	GBR35SQ-CC	3.5 in. Square Regressed Gimbal	120V	12W	860LM	5CCT*	● BK ● WH
	GBR35-CC-DUO	3.5 in. Double Square Regressed Gimbal	120V	24W	1740LM	5CCT*	● BK ● WH
	GBR35-CC-TRIO	3.5 in. Triple Square Regressed Gimbal	120V	36W	3010LM	5CCT*	● BK ● WH
	GBR04-CC	4 in. Round Regressed Gimbal	120V	15W	1240LM	5CCT*	● BK ● WH
	GBR04-CC-V ⚡	4 in. Round Multi-Voltage Regressed Gimbal, 0-10V Dimming	120 / 277 / 347V	15W	1240LM	5CCT*	● BK ● WH
	GBR04-DW ●	4 in. Round Warm Dimming Regressed Gimbal	120V	15W	1240LM	2.2-3K	● BK ● WH
	GBR06-CC	6 in. Round Regressed Gimbal	120V	20W	1500LM	5CCT*	● BK ● WH
	GBR06-DW ●	6 in. Round Warm Dimming Regressed Gimbal	120V	20W	1540LM	2.2-3K	● BK ● WH



	Scope	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	GMB2-CC	2 in. Gimbal Down Light	120V	8W	725LM	5CCT*	● BK ● WH
	GMB4-CC	4 in. Gimbal Down Light	120V	11W	810LM	5CCT*	● BK ● SN ● WH
	LEDDOWN63-CC	3 in. Gimbal Down Light	120V	8W	680LM	5CCT*	● BK ● WH



	Fusion	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	GPN4-CC	4 in. Gimbal Panel Light	120V	10W	850LM	5CCT*	● BK ● WH
	GPN6-CC	6 in. Gimbal Panel Light	120V	13W	1050LM	5CCT*	● BK ● WH

⚡ Multi-voltage option: 120V / 277V / 347V, 0-10V dimming

● Dim-to-warm technology, dims from 3000K to 2200K to mimic incandescent light

🔥 2-hour fire-rated without additional housing or hardware (in accordance with UL 263, ASTM E119, and CAN ULC S101)

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

    	Horus	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	GSP3-CC	4 in. Gimbal Down Light	120V	12W	950LM	5CCT*	
     	Hilux	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
  	HPD4-CC	4 in. Commercial Down Light	120V	20W	1415LM	5CCT*	
	HPD6-CC	6 in. Commercial Down Light	120V	30W	2100LM	5CCT*	
	HPD4-CC-V ⚡	4 in. Multi-Voltage Commercial Down Light with 0-10V Dimming	120 / 277 / 347V	20W	1415LM	5CCT*	
	HPD6-CC-V ⚡	6 in. Multi-Voltage Commercial Down Light with 0-10V Dimming	120 / 277 / 347V	30W	2100LM	5CCT*	
	HPD8-CC	8 in. Commercial Down Light	120V	40W	2600LM	5CCT*	
	HPD8-CC-V ⚡	8 in. Multi-Voltage Commercial Down Light with 0-10V Dimming	120 / 277 / 347V	40W	2600LM	5CCT*	
  	Indirect	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	IND4-DW ●	4 in. Indirect Warm Dimming Down Light	120V	9W	500LM	2.2-3K	
	IND6-DW ●	6 in. Indirect Warm Dimming Down Light	120V	12W	750LM	2.2-3K	
  	Alter	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDPNLRTF56-CC	6 in. Round Retrofit Recessed Light	120V	10W	720LM	5CCT*	
    	Boulevard	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LNR24-CC	24 in. Recessed Linear	120V	20W	1725LM	5CCT*	
	LNR24-CC-V ⚡	24 in. Multi-Voltage Recessed Linear with 0-10V Dimming	120 / 277 / 347V	20W	1725LM	5CCT*	
	LNR48-CC	48 in. Recessed Linear	120V	40W	3760LM	5CCT*	
	LNR48-CC-V ⚡	48 in. Multi-Voltage Recessed Linear with 0-10V Dimming	120 / 277 / 347V	40W	3760LM	5CCT*	
    	Aperture	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	MFD03-MW-CC 	3 in. Multi Functional Recessed Light with Multi-Wattage	120V	8 / 10 / 12W	600 / 800 / 1000LM	5CCT*	

⚡ Multi-voltage option: 120V / 277V / 347V, 0-10V dimming

● Dim-to-warm technology, dims from 3000K to 2200K to mimic incandescent light

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

 Multi-wattage switch offers three different lumen/wattage levels

COLOR SELECT

WET

OUTDOOR

RETROFIT

AIR TIGHT

Alter	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
RTJB3-CC	3 in. Recessed Retrofit Panel Light	120V	8W	620LM	5CCT*	 WH
RTJB4-3K	4 in. Recessed Retrofit Panel Light	120V	9W	550LM	3000K	
RTJB4-CC	4 in. Recessed Retrofit Panel Light	120V	9W	565LM	5CCT*	

COLOR SELECT

IC

DRY

RATED

Pinpoint	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
MSL1-CC	1-Light Microspot Recessed Down Light	120V	3W	120LM	5CCT*	BK WH
MSL2-CC	2-Light Microspot Recessed Down Light	120V	6W	320LM	5CCT*	
MSL4-CC	4-Light Microspot Recessed Down Light	120V	12W	600LM	5CCT*	
MSL5-CC	5-Light Microspot Recessed Down Light	120V	14W	800LM	5CCT*	
MSL5G-CC	5-Light Microspot Pivoting Recessed Down Light	120V	14W	800LM	5CCT*	
MSL10-CC	10-Light Microspot Recessed Down Light	120V	24W	1300LM	5CCT*	
MSL10G-CC	10-Light Microspot Pivoting Recessed Down Light	120V	24W	1300LM	5CCT*	

COLOR SELECT

WET

OUTDOOR

RATED

T24

JA8

CERTIFIED

AIR TIGHT

Versa	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
RC03-CC  	3 in. Multi-Voltage, Multi-Wattage Modular Recessed Downlight with TRIAC and 0-10V Dimming	120 / 277 / 347V	8 / 10 / 12W	1000LM	5CCT*	AZ BK GD WH
RC04-CC  	4 in. Multi-Voltage, Multi-Wattage Modular Recessed Downlight with TRIAC and 0-10V Dimming	120 / 277 / 347V	16 / 20 / 24W	2200LM	5CCT*	
RC06-CC  	6 in. Multi-Voltage, Multi-Wattage Modular Recessed Downlight with TRIAC and 0-10V Dimming	120 / 277 / 347V	24 / 30 / 36W	3000LM	5CCT*	
Each size offers 96 possible configurations – Please refer to our website for details						



Facet

	Facet	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	RGM2-CC	2 in. Regressed Gimbal Down Light	120V	8W	660LM	5CCT*	● BK ● WH
	RGM4-CC	4 in. Regressed Gimbal Down Light	120V	12W	1200LM	5CCT*	● BK ● WH
	RGM4-CC-V ⚡	4 in. Multi-Voltage Regressed Gimbal Light with 0-10V Dimming	120 / 277 / 347V	12W	1200LM	5CCT*	
	RGM6-CC	6 in. Regressed Gimbal Down Light	120V	20W	1500LM	5CCT*	



RGR

	RGR	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	RGR1-CC	1 in. Round Regressed Down Light	120V	6W	450LM	5CCT*	● BK ● WH
	RGR2-CC	2 in. Round Regressed Down Light	120V	8W	600LM	5CCT*	● BK ● SN ● WH
	RGR2SQ-CC	2 in. Square Regressed Down Light	120V	8W	600LM	5CCT*	
	RGR4-CC	4 in. Round Regressed Down Light	120V	15W	1100LM	5CCT*	
	RGR4-CC-V ⚡	4 in. Round Multi-Voltage Regressed Light with 0-10V Dimming	120 / 277 / 347V	15W	1100LM	5CCT*	
	RGR4SQ-CC	4 in. Square Regressed Down Light	120V	15W	1100LM	5CCT*	
	RGR4SQ-CC-V ⚡	4 in. Square Multi-Voltage Regressed Light with 0-10V Dimming	120 / 277 / 347V	15W	1100LM	5CCT*	
	RGR6-CC	6 in. Round Regressed Down Light	120V	20W	1600LM	5CCT*	
	RGR6SQ-CC	6 in. Square Regressed Down Light	120V	20W	1600LM	5CCT*	
	RGR2HP-CC	2 in. Round Regressed High Powered Down Light	120V	15W	1080LM	5CCT*	● BK ● WH
	RGR2HP-CC-V ⚡	2 in. Multi-Voltage Regressed High Powered Down Light 0-10V	120 / 277 / 347V	15W	1080LM	5CCT*	
	RGR4HP-CC	4 in. Round Regressed High Powered Down Light	120V	20W	1560LM	5CCT*	
	RGR4HP-CC-V ⚡	4 in. Multi-Voltage Regressed High Powered Down Light 0-10V	120 / 277 / 347V	20W	1560LM	5CCT*	



Mystique

	Mystique	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SPN4-CC	4 in. Round Recessed Panel Light with Multi Trim	120V	11W	800LM	5CCT*	● BK ● GD ● SN ● WH
	SPN4SQ-CC	4 in. Square Recessed Panel Light with Multi Trim	120V	11W	800LM	5CCT*	
	SPN6-CC	6 in. Round Recessed Panel Light with Multi Trim	120V	14W	1100LM	5CCT*	
	SPN6SQ-CC	6 in. Square Recessed Panel Light with Multi Trim	120V	14W	1100LM	5CCT*	

⚡ Multi-voltage option: 120V / 277V / 347V, 0-10V dimming

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

Recessed Accessories

Product code	Description	Finish
2000-EXT8FT	8 ft. Extension Cord for 2000 Series Recessed Fixtures	 WH
2000-EXT20FT	20 ft. Extension Cord for 2000 Series Recessed Fixtures	 WH
5000-EXT8FT	8 ft. Extension Cord for 5000 Series Recessed Fixtures	 WH
5000-EXT20FT	20 ft. Extension Cord for 5000 Series Recessed Fixtures	 WH
DDP4-TRIM-BK	4 in. Black Trim for DDP Fixtures	 BK
DDP6-TRIM-BK	6 in. Black Trim for DDP Fixtures	 BK
DRR4-TRIM-BK	4 in. Black Trim for DRR Fixtures	 BK
DRR4-TRIM-SBA	4 in. Sand Blasted Aluminum Trim for DRR Fixtures	 SBA
DRR6-TRIM-BK	6 in. Black Trim for DRR Fixtures	 BK
DRR6-TRIM-SBA	6 in. Sand Blasted Aluminum Trim for DRR Fixtures	 SBA
GMB2-GOOF-WH	Goof Ring for GMB2-CC Recessed Fixture	 WH
GPN-CC-EXT8FT	8 ft. Extension Cord for GPN Series Recessed Fixtures	 WH
GPN-CC-EXT20FT	20 ft. Extension Cord for GPN Series Recessed Fixtures	 WH
GSP-CC-EXT8FT	8 ft. Extension Cord for GSP Series Recessed Fixtures	 WH
GSP-CC-EXT20FT	20 ft. Extension Cord for GSP Series Recessed Fixtures	 WH
LEDDOWNACC-GOOF3	Goof Ring for 3 in. Recessed Fixtures	 WH
LEDDOWNACC-GOOF4	Goof Ring for 4 in. Recessed Fixtures	 WH
LEDDOWNACC-GOOF6	Goof Ring for 6 in. Recessed Fixtures	 WH
LEDDOWNACC-GOOFsq6	Goof Ring for 6 in. Square Recessed Fixtures	 WH
LNACC-L16FT	16 ft. Lens for LNR Recessed Linears and LNPd Pendants	 WH
REC-3K-EXT8FT	8 ft. Extension Cord for 3000K Recessed Fixtures	 WH
REC-3K-EXT20FT	20 ft. Extension Cord for 3000K Recessed Fixtures	 WH
REC-CC-EXT8FT	8 ft. Extension Cord for 5CCT Recessed Fixtures	 WH
REC-CC-EXT20FT	20 ft. Extension Cord for 5CCT Recessed Fixtures	 WH
REC-GOOF2-WH	Goof Ring for 2 in. Recessed Fixtures	 WH

Product code	Description	Finish
REC-PT4-XX	4 in. Recessed add-on Trim in Gold, Satin Nickel	 GD  SN
REC-TRIM4-XX	4 in. Recessed add-on Trim for 2000 & 5000 Series Fixtures	 BK  GD  SN
RFP-01	Rough-in Plate for 1 in. Recessed Fixtures	 GS
RFP-23	Rough-in Plate for 2 in. & 3 in. Recessed Fixtures	 GS
RFP-35	Rough-in Plate for 3.5 in. GBR35-CC Regressed Fixture	 GS
RFP-46	Rough-in Plate for 4 in. & 6 in. Recessed Fixtures	 GS
RFP-58	Rough-in Plate for 5 in. & 8 in. Recessed Fixtures	 GS
RFP-DU0	Rough-in Plate for GBR35-DU0 & FGM4-DU0 Recessed Fixtures	 GS
RFP-GMB2	Rough-in Plate for GMB2-CC Recessed Fixture	 GS
RFP-LNR24	Rough-In Plate for 24 in. Recessed Linears	 GS
RFP-LNR48	Rough-In Plate for 48 in. Recessed Linears	 GS
RFP-MSL1	Rough-in Plate for the 1 in. MSL1 Series	 GS
RFP-MSL2	Rough-in Plate for the 2 in. MSL2 Series	 GS
RFP-MSL4	Rough-in Plate for the 4 in. MSL4 Series	 GS
RFP-MSL5	Rough-in Plate for the 5 in. MSL5 Series	 GS
RFP-MSL56	Rough-in Plate for the 5 in. MSL56 Series	 GS
RFP-MSL10	Rough-in Plate for the 10 in. MSL10 Series	 GS
RFP-MSL106	Rough-in Plate for the 10 in. MSL106 Series	 GS
RFP-RC06	Rough-in Plate for the 6 in. RC06 Modular Recessed Fixture	 GS
RFP-TRIO	Rough-in Plate for GBR35-TRIO & FGM4-TRIO Recessed Fixtures	 GS
RFP-UNI	Universal Rough-in Plate for 2, 3, 4, & 6 in. Recessed Fixtures	 GS
RTJB4-ACC	Retrofit A-19 Socket & Clips for Recessed Can Installation	-
RTJB4-TRIM-BK	4 in. Black Trim for RTJB4-3K-WH and RTJB4-CC-WH	 BK

Under Cabinet Collection

12V



	Super-Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	4001-CC	Recessed High-Powered Superpuck	12V	3W	150LM	5CCT*	BK GD SN WH
	Duo-Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	4005-CC	12V 2-in-1 Puck	12V	2W	138LM	5CCT*	BK SN WH
	K4005-CC	Kit of 3 12V 2-in-1 Pucks	12V	2W*	138LM*	5CCT*	
	*Per Puck						
	Ultra-Slim Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	4006	12V Round Ultra Slim Puck	12V	3.6W	250LM	3000K	BK SN WH
	4006-TRIM	Add-on Trim for 4006 Pucks	-	-	-	-	BK SN
	Mini-Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDRDM1	12V LED Gimbal Puck	12V	1.1W	80LM	3000K	BK SBA WH
	Eco-Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDROP18	12V 2-in-1 Plastic Puck	12V	1.7W	100LM	3000K	WH

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K



12V COB-Tape

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	COBTP3M	12V	24W	1500LM	3000K	○ WH
	COBTP5M	12V	48W	2250LM	3000K	○ WH
	COBTP-REEL	12V	8 W/m.	500LM/m.	3000K	
	COBTP-ALXT-XX	-	-	-	-	● BK
	COBTP-ALXT-L5M-XX	-	-	-	-	○ WH
	COBTP-CC06	12V	-	-	-	○ WH
	COBTP-EXT02	12V	-	-	-	
	COBTP-EXT24	12V	-	-	-	
	COBTP-EXT60	12V	-	-	-	



SwivLED

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SWIVLED12-CC	12V	3W	300LM	5CCT*	○ WH
	SWIVLEDCC-EXT10	12V	-	-	-	
	SWIVLEDCC-EXT36	12V	-	-	-	
	SWIVLEDCC-EXT60	12V	-	-	-	

Under Cabinet Collection

24V



24V COB-Tape

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	COBTP24V-K10FT-CC	24V	18W	1590LM	5CCT*	○ WH
	COBTP24V-K20FT-CC	24V	36W	3180LM	5CCT*	
	COBTP24V-R50FT-CC	24V	1.8W / ft.	160LM / ft.	5CCT*	
	COBTP24V-R100FT-CC	24V	1.8W / ft.	160LM / ft.	5CCT*	
	COBTP-ALXT-XX	-	-	-	-	● BK
	COBTP-ALXT-L5M-XX	-	-	-	-	○ WH
	COBTP24V-ACCI	24V	-	-	-	○ WH
	COBTP24V-ACCL	24V	-	-	-	
	COBTP24V-EXT24	24V	-	-	-	
	COBTP24V-EXT24	24V	-	-	-	
	COBTP24V-EXT120	24V	-	-	-	
	COBTP24V-CC36	24V	-	-	-	
	COBTP24V-SWT	24V	-	-	-	

Under Cabinet Collection

120V



 DRY	Slide	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DD1260	Dimmer Switch with Integrated Driver 120V AC Input ~ 12V DC, 60W Output	120V	-	-	-	 WH

 COLOR SELECT	 DRY	PowerLED Puck	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	6001-CC	PowerLED Under Cabinet Puck Light	120V	4W	235LM	5CCT*	 BK  SN  WH	

 COLOR SELECT	 DRY	PowerLED Linear	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	6009CC	9 in. PowerLED Under Cabinet Linear	120V	3W	250LM	5CCT*	 SBA	
	6012CC	12 in. PowerLED Under Cabinet Linear	120V	4W	330LM	5CCT*		
	6024CC	24 in. PowerLED Under Cabinet Linear	120V	8W	675LM	5CCT*		
	6036CC	36 in. PowerLED Under Cabinet Linear	120V	12W	1080LM	5CCT*		
	6048CC	48 in. PowerLED Under Cabinet Linear	120V	16W	1300LM	5CCT*		

 COLOR SELECT	 DRY	CounterLED Linear	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	9009CC	9 in. Hardwired Pivoting Under Cabinet Linear	120V	3.5W	200LM	5CCT*	 WH	
	9012CC	12 in. Hardwired Pivoting Under Cabinet Linear	120V	4W	335LM	5CCT*		
	9018CC	18 in. Hardwired Pivoting Under Cabinet Linear	120V	8W	560LM	5CCT*		
	9024CC	24 in. Hardwired Pivoting Under Cabinet Linear	120V	12W	850LM	5CCT*		
	9030CC	30 in. Hardwired Pivoting Under Cabinet Linear	120V	16W	1115LM	5CCT*		

 DRY	ProLED Linear	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	HLF09-3K	9 in. Hardwired Under Cabinet Linear	120V	3W	200LM	3000K	 WH
	HLF12-3K	12 in. Hardwired Under Cabinet Linear	120V	4W	380LM	3000K	
	HLF18-3K	18 in. Hardwired Under Cabinet Linear	120V	8W	675LM	3000K	
	HLF24-3K	24 in. Hardwired Under Cabinet Linear	120V	12W	900LM	3000K	
	HLF30-3K	30 in. Hardwired Under Cabinet Linear	120V	16W	1100LM	3000K	

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

Under Cabinet Accessories

12V

Product code	Description	Finish
4000-E24	24 in. 12V Extension Cord	● BK
4000-E60	60 in. 12V Extension Cord	● BK
4000HRNS-24	24 in. 12V “Y” Splitter	● BK
BT06DIM-IC	6W 12V DC Dimmable LED Hardwire Driver	○ WH
BT12DIM-IC	12W 12V DC Dimmable LED Hardwire Driver	○ WH
BT24DIM-IC	24W 12V DC Dimmable LED Hardwire Driver	○ WH
BT36DIM	36W 12V DC Dimmable LED Hardwire Driver	○ WH
BT48DIM	48W 12V DC Dimmable LED Hardwire Driver	○ WH
ETR-LED10WPI	12W 12V DC Plug-in Driver	○ WH
ETR-LED24WPI	24W 12V DC Plug-in Driver	○ WH
LEDACC-SCTE-PLUG	Connection Cord with Plug for 12V Products	● BK
LEDACC-SCTE-REC	Connection Cord with Receptacle for 12V Products	● BK
LEDHRNS-6	6 Directions Connection Harness for 12V Products	● BK

120V

Product code	Description	Finish
6000-JB	Junction box for 120V Series	○ WH
6001-E24	24 in. Extension Cord for PowerLED Series	○ WH
6001-E60	60 in. Extension Cord for PowerLED Series	○ WH
6001-PC	72 in. Power Cord for PowerLED Series	○ WH
6000-ACCE06	6 in. Extension Cord for PowerLED Linears	○ WH
6000-ACCE24	24 in. Extension Cord for PowerLED Linears	○ WH
6000-ACCE60	60 in. Extension Cord for PowerLED Linears	○ WH
6000-ACCLR	Kit of Left and Right “L” Connectors for PowerLED Linears	○ WH
6000-ACCPC	72 in. Power Cord for PowerLED Linears	○ WH
9000-ACCE24	24 in. Extension Cord for 9000 and HLF Series Linears	○ WH
9000-ACCE72	72 in. Extension Cord for 9000 and HLF Series Linears	○ WH

24V

Product code	Description	Finish
DR2412DIM	12W 24V DC Dimmable LED Hardwire Driver	● BK
DR2424DIM	24W 24V DC Dimmable LED Hardwire Driver	● BK
DR2448DIM	48W 24V DC Dimmable LED Hardwire Driver	● BK
DR2460DIM	60W 24V DC Dimmable LED Hardwire Driver	● BK
DR2496DIM	96W 24V DC Dimmable LED Hardwire Driver	● BK
COBTP24V-ETR30	30W 24V DC Plug-in Driver	● BK
COBTP24V-ETR60	60W 24V DC Plug-in Driver	● BK

Flush Mount Collection



 COLOR SELECT	 DRY	Hover	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish		
		CCFM-CC	24 in. 4-Ring Flush Mount	120V	42W	2250LM	5CCT*	 		
 COLOR SELECT	 DAMP	Ora	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish		
		CF613-CC	13 in. Glass Flush Mount	120V	32W	1800LM	5CCT*	  		
 COLOR SELECT	 DRY	 T24 JA8 CERTIFIED	Aurora	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish	
			CFH12-CC	12 in. Dual-Zone Flush Mount	120V	26W	1850LM	5CCT*	 	
 COLOR SELECT	 WET	 OUTDOOR	 T24 JA8 CERTIFIED	Delta	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
				CFLEDR06-CC	6 in. Round Flush Mount	120V	11W	700LM	5CCT*	   
				CFLEDR10-CC	10 in. Round Flush Mount	120V	17W	1200LM	5CCT*	
				CFLEDR14-CC	14 in. Round Flush Mount	120V	26W	1700LM	5CCT*	
				CFLEDR18-CC	18 in. Round Flush Mount	120V	30W	2100LM	5CCT*	  
				CFLEDR24-CC	24 in. Round Flush Mount	120V	45W	3630LM	5CCT*	
				CFLEDR06-CC-V ⚡	6 in. Multi-Voltage Round Flush Mount with 0-10V Dimming	120 / 277 / 347V	11W	700LM	5CCT*	
				CFLEDR10-CC-V ⚡	10 in. Multi-Voltage Round Flush Mount with 0-10V Dimming	120 / 277 / 347V	17W	1200LM	5CCT*	
				CFLEDR14-CC-V ⚡	14 in. Multi-Voltage Round Flush Mount with 0-10V Dimming	120 / 277 / 347V	26W	1700LM	5CCT*	
				CFLEDR18-CC-V ⚡	18 in. Multi-Voltage Round Flush Mount with 0-10V Dimming	120 / 277 / 347V	30W	2100LM	5CCT*	
				CFLEDR24-CC-V ⚡	24 in. Multi-Voltage Round Flush Mount with 0-10V Dimming	120 / 277 / 347V	45W	3630LM	5CCT*	
				CFLEDSQ06-CC	6 in. Square Flush Mount	120V	11W	700LM	5CCT*	  
				CFLEDSQ10-CC	10 in. Square Flush Mount	120V	17W	1200LM	5CCT*	
				CFLEDSQ14-CC	14 in. Square Flush Mount	120V	26W	1700LM	5CCT*	

COLOR SELECT WET OUTDOOR T24 JA8 CERTIFIED		Focus	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	CYL05-CC	5 in. Multi-Lens Cylindrical Flush Mount	120V	14W	1100LM	5CCT*	BK WH	
	CYL06-CC-V ⚡	6 in. Multi-Lens Cylindrical Flush Mount with 0-10V Dimming	120 / 277 / 347V	20W	1800LM	5CCT*		
	CYL05-TRIM	Internal Trim for 5" Cylindrical Flush Mount	-	-	-	-	AZ BK GD WH	
	CYL06-TRIM	Internal Trim for 6" Cylindrical Flush Mount	-	-	-	-		
COLOR SELECT DAMP		Atom	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FDB-CC	16 in. Double Oblong Ring Flush Mount	120V	40W	1350LM	5CCT*	BK GD	
COLOR SELECT DAMP		Newton	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FMT18-CC	18 in. Outer Ring Flush Mount	120V	24W	1300LM	5CCT*	BK	
COLOR SELECT WET OUTDOOR		Radiance	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FMM09-CC	9 in. Slim Flush Mount	120V	14W	1100LM	5CCT*	BK SN WH	
	FMM12-CC	12 in. Slim Flush Mount	120V	20W	1800LM	5CCT*		
COLOR SELECT DAMP T24 JA8 CERTIFIED COASTAL FRIENDLY		Prime	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FMP05-CC	5 in. Round Flush Mount	120V	9W	600LM	5CCT*	WH	
	FMP05M-CC 🦿	5 in. Round Flush Mount with Motion Sensor	120V	9W	600LM	5CCT*		
	FMP09-CC	9 in. Round Flush Mount	120V	14W	1110LM	5CCT*		
	FMP12-CC	12 in. Round Flush Mount	120V	20W	1800LM	5CCT*		
COLOR SELECT WET OUTDOOR T24 JA8 CERTIFIED COASTAL FRIENDLY		Prime Coastal	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FMP05-CC-CR	5 in. Round Coastal Friendly Flush Mount	120V	9W	470LM	5CCT*	WH	
	FMP09-CC-CR	9 in. Round Coastal Friendly Flush Mount	120V	14W	960LM	5CCT*		
	FMP12-CC-CR	12 in. Round Coastal Friendly Flush Mount	120V	20W	1530LM	5CCT*		

⚡ Multi-voltage option: 120V / 277V / 347V, 0-10V dimming

🦿 Motion sensor

🏖 Coastal friendly: Designed to withstand salty air. 480h salt spray test approved.

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K



	Napa	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	NAPF20-CC	20 in. 2-In-1 Flush Mount and Pendant	120V	40W	1825LM	5CCT*	● BK ○ WH
	NAPF20-ACCST24	24 in. Extension for 2-In-1 Flush Mount and Pendant	-	-	-	-	



	Misty	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FUZ11-CC	11 in. Square Flush Mount	120V	15W	1000LM	5CCT*	● BK



	Boulevard	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LNFM48-CC	48 in. Linear Flush Mount	120V	37W	2500LM	5CCT*	● BK ○ WH
	LNFM48-CC-V ⚡	48 in. Multi-Voltage Linear Flush Mount with 0-10V Dimming	120 / 277 / 347V	37W	2500LM	5CCT*	



	Asterisk	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SSF20-CC	20 in. Semi Flush Mount	120V	15W	1060LM	5CCT*	● BK



	Stellar	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	STRFM-3K	32 in. Star Flush Mount	120V	40W	2000LM	3000K	● BK ○ WH



	Fusion	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	TLFM12-CC	12 in. Trimless Flush Mount	120V	25W	2000LM	5CCT*	● BK ○ WH
	TLFM21-CC	21 in. Trimless Flush Mount	120V	50W	4200LM	5CCT*	



	Pyra	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	TRFM22-CC	22 in. Triangular Flush Mount	120V	40W	1500LM	5CCT*	● BK ● GD ○ WH



	Sway	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	W3FM-CC	20 in. Three-Stem Semi-Flushmount	120V	20W	880LM	5CCT*	● BK ● GD

Vanity Collection



	Spin	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	BRV24-CC	24 in. Vanity Light	120V	15W	880LM	5CCT*	● BK
	BRV36-CC	36 in. Vanity Light	120V	22W	1490LM	5CCT*	

	Noble One	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDVAN001-CC-18	18 in. Glass Vanity Light	120V	16W	1000LM	5CCT*	● BK ● CH ● SN
	LEDVAN001-CC-24	24 in. Glass Vanity Light	120V	24W	1300LM	5CCT*	

	Noble Two	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDVAN002-CC-24	24 in. Glass Vanity Light	120V	24W	1300LM	5CCT*	● BK ● CH ● SN
	LEDVAN002-CC-36	36 in. Glass Vanity Light	120V	32W	1900LM	5CCT*	

	Lyra	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDVAN003-CC-24	24 in. Linear Vanity Light	120V	23W	1900LM	5CCT*	● BK ● CH ● GD ● SN ● WH
	LEDVAN003-CC-32	32 in. Linear Vanity Light	120V	38W	2800LM	5CCT*	

	Ledge	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VAL24-CC	24 in. Adjustable Linear Vanity Light	120V	30W	2200LM	5CCT*	● BK ● CH ● SN
	VAL36-CC	36 in. Adjustable Linear Vanity Light	120V	32W	2330LM	5CCT*	

	Shift	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VA024-CC	24 in. Adjustable Oblong Vanity Light	120V	31W	2470LM	5CCT*	● BK ● GD
	VA032-CC	32 in. Adjustable Oblong Vanity Light	120V	34W	2680LM	5CCT*	

⚡ Multi-voltage option: 120V / 277V / 347V,
0-10V dimming

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K



Balance

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VCC24-CC 24 in. Two-Tone Vanity Light	120V	20W	1490LM	5CCT*	
	VCC36-CC 36 in. Two-Tone Vanity Light	120V	30W	1950LM	5CCT*	



Lightning

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VDL40-CC 40 in. Dual-Light Vanity	120V	30W	1500LM	5CCT*	 



Portrait

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VLG24-CC 24 in. Adjustable Vanity Light	120V	16W	1100LM	5CCT*	   
	VLG36-CC 36 in. Adjustable Vanity Light	120V	26W	1400LM	5CCT*	



Borealis

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VRB24-CC 24 in. Curled Rectangular Vanity Light	120V	40W	1200LM	5CCT*	





Aria

	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	VSW24-CC 24 in. Rectangular Swivel Vanity Light	120V	40W	1280LM	5CCT*	 
	VSW36-CC 36 in. Rectangular Swivel Vanity Light	120V	40W	1500LM	5CCT*	

Pendant Collection



	Spin	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	BRPD18-CC	18 in. Spiral Vertical Pendant Light	120V	15W	950LM	5CCT*	● BK
	BRPD40-CC	40 in. Spiral Horizontal Pendant Light	120V	40W	2800LM	5CCT*	
	Quartet	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	CAPD72-CC	72 in. Multi-Head Pendant Light	120V	22W	1450LM	5CCT*	● BK
	CAPD-ACCLL	Kit of 4 Tall Lenses for CAPD72-CC Pendant Light	-	-	-	-	
	CAPD72-CC	Kit of 4 Short Lenses for CAPD72-CC Pendant Light	-	-	-	-	
	Drop	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	CFPD20-CC	20 in. Multi-Head Pendant Light	120V	39W	1675LM	5CCT*	● BK
	Atom	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	FPD-CC	16 in. Vertical Oblong Pendant Light	120V	24W	820LM	5CCT*	● BK ● GD
	FPDC3-CC	3x 16 in. Vertical Oblong Pendant Cluster	120V	40W	1400LM	5CCT*	
	FPD60-CC	60 in. Horizontal Oblong Pendant Light	120V	50W	1700LM	5CCT*	● BK
	Iris	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	IRPD-CC	16 in. Glass Pendant Light	120V	12W	900LM	5CCT*	● BK ● GD ● WH
	Boulevard	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LNP48-CC	48 in. Linear Pendant Light	120V	40W	2805LM	5CCT*	● BK ● WH
	LNP48-CC-V ⚡	48 in. Multi-Voltage Linear Pendant Light with 0-10V Dimming	120 / 277 / 347V	40W	2805LM	5CCT*	
	LNP48-CC	48 in. Linear Pendant Light with Aircraft Cables	120V	40W	2805LM	5CCT*	
	LNP48-CC-V ⚡	48 in. Multi-Voltage Linear Pendant Light with Aircraft Cables and 0-10V Dimming	120 / 277 / 347V	40W	2805LM	5CCT*	

⚡ Multi-voltage option: 120V / 277V / 347V, 0-10V dimming

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

	Pinpoint	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	MSLPD48-CC	48 in. Microspot Linear Pendant Light	120V	40W	2710LM	5CCT*	● BK
	Napa	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	NAPF20-CC	20 in. 2-In-1 Pendant and Flush Mount	120V	40W	1825LM	5CCT*	● BK
	NAPF20-ACCST24	24 in. Extension for 2-In-1 Pendant and Flush Mount	-	-	-	-	● WH
	Nova	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	PDC18-CC	18 in. Cylindrical Pendant Light	120V	9W	510LM	3CCT*	● BK ● SBA ● WH
	Channel	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	PDLED120-24	24 in. Duo-Light Cylindrical Pendant	120-277V	30W	300LM	3CCT*	● BK
	PDLED120-36	36 in. Duo-Light Cylindrical Pendant	120-277V	30W	300LM	3CCT*	● WH
	PDLED120-48	48 in. Duo-Light Cylindrical Pendant	120-277V	30W	300LM	3CCT*	
	PDLED120-60	60 in. Duo-Light Cylindrical Pendant	120-277V	30W	300LM	3CCT*	
	PDLED120-5†	5 Light Round Duo-Light Cylindrical Pendant Cluster	120-277V	150W	1500LM	3CCT*	
	PDLED120-5SQ†	5 Light Square Duo-Light Cylindrical Pendant Cluster	120-277V	150W	1500LM	3CCT*	
	PDLED120-8†	8 Light Round Duo-Light Cylindrical Pendant Cluster	120-277V	240W	2400LM	3CCT*	
	PDLED120-8SQ†	8 Light Square Duo-Light Cylindrical Pendant Cluster	120-277V	240W	2400LM	3CCT*	
	Eclipse	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	PDR14-CC	14 in. Double-Ring Pendant Light	120V	25W	1700LM	5CCT*	● BG
	Circa	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	RGPD24-CC	24 in. Circular Pendant Light	120V	28W	1500LM	5CCT*	● BK ● GD ● WH
	Olympia	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	RRPD2-CC	14 in. 2-Ring Vertical Pendant Light	120V	12W	750LM	5CCT*	● BK
	RRPD5-CC	42 in. 5-Ring Horizontal Pendant Light	120V	30W	1530LM	5CCT*	● WH

5CCT: 2700K, 3000K, 3500K, 4000K, 5000K

3CCT: 3000K, 4000K, 5000K

† Custom product, final sale, no returns

	Current	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SLPD60-CC	60 in. Linear Pendant Light	120V	32W	2140LM	5CCT*	● BK ● GD ● WH
	Beam	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SPD48-CC	48 in. Slim Linear Pendant Light	120V	27W	1530LM	5CCT*	● BK ● WH
	SPD72-CC	72 in. Slim Linear Pendant Light	120V	54W	2300LM	5CCT*	
	SPD72-3K	72 in. Slim Linear Pendant Light, 3000K	120V	55W	2800LM	3000K	● BK
	Helix	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SPR20-CC	20 in. Spiral Pendant Light	120V	30W	1060LM	5CCT*	● BK
	SPR34-CC	34 in. Spiral Pendant Light	120V	60W	2370LM	5CCT*	
	Asterisk	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SSPD32-CC	32 in. Pendant Light	120V	30W	1500LM	5CCT*	● BK
	Stellar	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	STRPD-3K	29 in. Star Pendant Light	120V	33W	1880LM	3000K	● BK ● WH
	Pyra	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	TRPD34-CC	34in. Triangular Pendant Light	120V	80W	3140LM	5CCT*	● BK ● GD ● WH
	Twirl	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	TWPD-CC	28 in. Twirl Pendant Light	120V	84W	3960LM	5CCT*	● BK ● GD
	Twist	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	TWPS-3K	20.5 in. Small Twirl Pendant Light	120V	30W	1800LM	3000K	● BK
	Sway	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	W1PD48-CC	48 in. Single Curved Pendant Light	120V	24W	1330LM	5CCT*	● BK ● GD
	W3PD48-CC	48 in. 3-Light Curved Pendant Light	120V	31W	1590LM	5CCT*	

Wall Collection



COLOR SELECT WET OUTDOOR

DARKSKY

COLOR SELECT WET OUTDOOR		Profile	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LWJ08-CC	8 in. Rectangular Dual Light Wall Sconce	120V	10W	390LM	5CCT*	BK	
	LWJ16-CC	16 in. Rectangular Dual Light Wall Sconce	120V	20W	760LM	5CCT*	BK WH	
	LWJ24-CC	24 in. Rectangular Dual Light Wall Sconce	120V	45W	2345LM	5CCT*	BK	

COLOR SELECT WET OUTDOOR	Pinpoint	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	MSLWALL-CC	18 in. 6-Light Microspot Linear Wall Sconce	120V	15W	760LM	5CCT*	BK

COLOR SELECT WET OUTDOOR			Midnight	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	RWS24-CC	24 in. Ultra-Slim Linear Wall Sconce	120V	6W	400LM	5CCT*	● BK		
	RWS48-CC	48 in. Ultra-Slim Linear Wall Sconce	120V	14W	1000LM	5CCT*	● BK		
	RWS60-CC	60 in. Ultra-Slim Linear Wall Sconce	120V	17W	1400LM	5CCT*	● BK		

COLOR SELECT WET OUTDOOR Alto			Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SQS06-CC	6 in. Square Ultra-Slim Wall Sconce with Character Set	120V	8.5W	550LM	5CCT*	BK	
	SQS10-CC	10 in. Square Ultra-Slim Wall Sconce with Character Set	120V	13W	940LM	5CCT*	WH	
0123456789 0123456789 0123456789 0123456789 0123456789 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z	SQS06-NUM	50 Numbers, 27 Letters Set for SQS06 Wall Sconce				BK		
	SQS10-NUM	50 Numbers, 27 Letters Set for SQS10 Wall Sconce						
	SQS15-NUM	50 Numbers, 27 Letters Set for SQS15 Wall Sconce						

 		Aries	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	STK21-3K	21 in. Linear Wall Sconce	120V	7W	400LM	3000K	BK WH	
	STK37-3K	37 in. Linear Wall Sconce	120V	13W	840LM	3000K		

COLOR SELECT WET OUTDOOR			Gemini	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SWS24-CC	24 in. Rectangular Wall Sconce	120V	20W	600LM	5CCT*	● BK		
	SWS36-CC	36 in. Rectangular Wall Sconce	120V	30W	1000LM	5CCT*			
	SWS48-CC	48 in. Rectangular Wall Sconce	120V	40W	1300LM	5CCT*			
	SWS60-CC	60 in. Rectangular Wall Sconce	120V	50W	1500LM	5CCT*			

Table & Floor Lamp Collection



	Glam	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		RTL-3C 14 in. Rechargeable Table Lamp	5V	2W	220LM	3CCT*	BK SA WH
	Stellar	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		STRFL-3K 64 in. Star Floor Lamp	120V	14W	1200LM	3000K	BK WH
	Axis	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		SM-STTL20 20 in. Smart Digital Table Lamp	120V	8W	300LM	RGB IC + 2700K - 6500K	BK
	SM-STFL50 50 in. Smart Digital Floor Lamp		120V	16W	720LM		BK

Step Light Collection




COLOR SELECT WET OUTDOOR


5CCT: 2200K, 2700K, 3000K, 3500K, 4000K

3CCT: 3000K, 4000K, 5000K

Smart Home Collection



 	Pro Bulbs	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-BLBA21	Smart A21 RGB+CCT Light Bulb	120V	12W	1100LM	RGB + 2700K - 6500K	
	DCP-BLBBR30	Smart BR30 RGB+CCT Light Bulb	120V	12W	1200LM		
 	Frame	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-CGWS	13 in. Smart RGB+CCT Caged Wall Sconce	120V	20W	1200LM	RGB + 2700K - 6500K	
 	Etch Pro	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-DDP4	4 in. Smart RGB+CCT Regressed Panel Light	120V	15W	1000LM	RGB + 2700K - 6500K	
	DCP-DDP6	6 in. Smart RGB+CCT Regressed Panel Light	120V	20W	1500LM		
	DDP4-TRIM	4 in. Black Trim for DDP Fixtures	-	-	-	-	
	DDP6-TRIM	6 in. Black Trim for DDP Fixtures	-	-	-	-	
 	Pivot Pro	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-FGM4	4 in. Smart RGB+CCT Flat Gimbal Down Light	120V	9W	800LM	RGB + 2700K - 6500K	
 	Revolve Pro	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-GBR35	3.5 in. Smart RGB+CCT Regressed Gimbal Down Light	120V	12W	650LM	RGB + 2700K - 6500K	 
 	Pro Hub	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-HUB	Smart Hub	120V	-	-	-	
 	Boulevard Pro	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-LNPD48	48 in. Smart RGB+CCT Linear Pendant	120V	40W	2620LM	RGB + 2700K - 6500K	
	LNACC-L16FT	16 ft. Lens for LNR Series Recessed Linears and LNPD Pendants	-	-	-		
 	Architect	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-LWS19	19 in. Smart RGB+CCT Wall Sconce	120V	15W	1130LM	RGB + 2700K - 6500K	

   Boulevard Pro			Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-LNR24-WH	24 in. Smart RGB+CCT Recessed Linear	120V	20W	1785LM	RGB + 2700K - 6500K	 WH	
	DCP-LNR48-WH	48 in. Smart RGB+CCT Recessed Linear	120V	40W	3380LM			
	LNACC-L16FT	16 ft. Lens for LNR Series Recessed Linears and LNPD Pendants	-	-	-		 WH	

   		Excel Pro	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-PNL4	4 in. Smart RGB+CCT Panel Light	120V	14W	750LM	RGB + 2700K - 6500K		WH
	DCP-PNL6	6 in. Smart RGB+CCT Panel Light	120V	20W	1200LM			
	DCP-PNL4-TRIM	4 in. Black Trim for DCP-PNL4 Panel Light	-	-	-	-		BK
	DCP-PNL6-TRIM	6 in. Black Trim for DCP-PNL6 Panel Light	-	-	-	-		BK

 WET  OUTDOOR  Clicc Description Voltage Wattage Delivered lumens Color °T Finish							
	DCP-RMCT	Smart Remote Control	-	-	-	-	 WH

	Glow	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish	
		DCP-TAP10FT	10-Foot Smart RGB+CCT Indoor Tape Light Kit	24V	9W	700LM	RGB + 2700K - 6500K	 WH
		DCP-TAP20FT	20-Foot Smart RGB+CCT Indoor Tape Light Kit	24V	16W	1200LM		
		DCP-TAP50FT [†]	50-Foot Smart RGB+CCT Indoor Tape Light Kit [†] Can be configured as two 25-foot runs (specs apply to both runs)	24V	38W	2800LM		

 DRY 		Smart Switch	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		SM-DIMSW	Smart Dimmer Switch	120V	250/430W	-	-	 WH

 DRY 		Smart Controller	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SM-WLCT	Smart Wall Control	120V	-	-	-	 WH	

 DRY 	Smart Plug	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	SM-PLUG	Smart Plug	120V	1200W	-	-	 WH


		Delta Smart	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		SM-FM08	8 in. Smart RGB+CCT Flush Mount	120V	10W	800LM	RGB + 2700K - 6500K	 WH

Landscape Collection



		Sol	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		GRD2-CC	2 in. Recessed Ground Well Light	12VAC	9W	600LM	5CCT*	● BK
		Beacon	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LPL26-CC	26 in. Landscape Path Light	12VAC	13W	800LM	5CCT*	● BK
		LPL26-3K	26 in. Landscape Path Light	12VAC	13W	800LM	3000K	● BK
		Flux	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LPP20-CC	20 in. Landscape Path Light	12VAC	8W	360LM	5CCT*	● BK
		Edge	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LSQP-CC	12 in. Landscape Path Light	12VAC	3W	265LM	5CCT*	● BK
		Column	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LRB20-CC	20 in. Landscape Bollard	12VAC	12W	600LM	5CCT*	● BK
		LRB30-CC	30 in. Landscape Bollard	12VAC	13W	700LM	5CCT*	
		LRB30-3K	30 in. Landscape Bollard	12VAC	13W	700LM	3000K	
		Spot	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LSP3-CCL	3 in. Diameter Landscape Spotlight	12VAC	10W	500LM	5CCT*	● BK
		LSP4-CCL	4 in. Diameter Landscape Spotlight	12VAC	20W	1000LM	5CCT*	
		Slim spot	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		LSS10-CC	2 in. Diameter Landscape Spotlight	12VAC	10W	370LM	5CCT*	● BK



	Contour	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LHS07-CC	7 in. Hardscape / Step Light	12VAC	3W	200LM	5CCT*	● BK



	Stature	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	LEDPATH004D	36 in. Square Shaped Bollard	120V	7.5W	350LM	3000K	● BK ● SG



	Transformers	Description	Output Voltage	Wattage	Delivered lumens	Color °T	Finish
	LTRP-60-BK	60W Plastic Low-Voltage Landscape Transformer	12VAC	60W	-	-	● BK
	LTR-300-BK	300W Metal Low-Voltage Landscape Transformer	12, 13, 14, 15VAC	300W	-	-	

Landscape Accessories


Product code	Description	Finish
LAN-ACC-MS	6-3/4 in. Metal Stake for Spotlights	● BK
LSP-ACC-MS12	12 in. Metal Stake for Spotlights	● BK
LAN-ACC-PS	7-1/4 in. Plastic Stake for Path Lights and Bollards	● BK
LSP-EXT04	4 in. Black Stem Extension for Spotlights	● BK
LSP-WM	Wall Mount Adapter for Landscape Spotlights	● BK
LSP3-ACCLN	20° and 40° Lenses for LSP3-CC Spotlight	○ WH
LSP4-ACCLN	20° and 40° Lenses for LSP4-CC Spotlight	○ WH

Product code	Description	Finish
LCBL-50-14	50 ft. 14 Gauge Low-Voltage Landscape Wire	● BK
LCBL-50-16	50 ft. 16 Gauge Low-Voltage Landscape Wire	● BK
LCBL-100-12	100 ft. 12 Gauge Low-Voltage Landscape Wire	● BK
LCBL-100-14	100 ft. 14 Gauge Low-Voltage Landscape Wire	● BK
LCBL-100-16	100 ft. 16 Gauge Low-Voltage Landscape Wire	● BK
LCBL-200-12	200 ft. 12 Gauge Low-Voltage Landscape Wire	● BK

5CCT: 2200K, 2700K, 3000K, 3500K, 4000K

Smart Landscape Collection



	Acute		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-45HP20	20 in. Smart Landscape Path Light	24VDC	7W	600LM	RGB + 2200K - 4000K	● BK
	Mason		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-BRK12	12 in. Smart Landscape Brick / Step Light	24VDC	8W	280LM	RGB + 2200K - 4000K	● BK
	Gaia		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-CPL24	24 in. Smart Landscape Path Light	24VDC	6W	470LM	RGB + 2200K - 4000K	● BK
	Horizon		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-FLD30	7 in. Smart Landscape Directional Flood Light	24VDC	30W	3000LM	RGB + 2200K - 4000K	● BK
	Flex		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-NFTAP5M	5-meter Smart Landscape Neon Tape	24VDC	24W	1200LM	RGB + 2200K - 4000K	○ WH
		DCP-ACC-NFEC	Silicone End Cap for Smart Landscape Neon Tape	-	-	-	-	○ WH
		DCP-ACC-NFCH	1-Meter Aluminum U-Channel for Smart Landscape Neon Tape	-	-	-	-	○ WH
	Kayu		Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
		DCP-RK10	10 in. Smart Landscape Rock Light	24VDC	5W	400LM	RGB + 2200K - 4000K	○ WH
		DCP-RK18	18 in. Smart Landscape Rock Light	24VDC	7W	600LM		

	Orion	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-STG48	48 ft. Smart Landscape String Light	24VDC	24W	1200LM	RGB + 2200K - 4000K	● BK
	Axis	Description	Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-STK20	20 in. Smart Landscape Path Light	24VDC	6W	310LM	RGB + 2200K - 4000K	● BK
	DCP-STK50	50 in. Smart Landscape Path Light	24VDC	12W	565LM		
	Core	Description	Output Voltage	Wattage	Delivered lumens	Color °T	Finish
	DCP-TR60	60W Smart Low-Voltage Landscape Transformer	24VDC	60W	-	-	● BK
	DCP-TR200	200W Smart Low-Voltage Landscape Transformer	24VDC	2 x 100W	-	-	
	DCP-TR300	300W Smart Low-Voltage Landscape Transformer	24VDC	3 x 100W	-	-	

Smart Landscape Accessories

Product code	Description	Finish	Product code	Description	Finish
DCP-ACC-MB	Mounting Bracket	● BK	DCP-SPTACCLENS	120° Frosted Lens for DCP-SPT6 Spot Light	○ WH
DCP-ACC-MS06	6 in. Metal Ground Stake	● BK	DCP-SPTXT14	14 in. Extension Tube for DCP-SPT6 Spot Light	● BK
DCP-ACC-MS12	12 in. Metal Ground Stake	● BK	DCP-STGACCB LB	Replacement Bulb for DCP-STG48 String Light	○ WH
DCP-ACC-NFCH	1-Meter U-channel for Neon Flex Tape	○ WH	DCP-STGACCP CB	Replacement PCB for DCP-STG48 String Light	-
DCP-PTR36	36W Plug-In Bluetooth Driver	● BK			



STOCKING GUIDE 2025 / 26



Canada
80, boul. de la Seigneurie E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

dals