


CONTOUR PRO

The Contour's compact size ensures a discreet and unobtrusive appearance while providing ample illumination for small to medium-sized areas. Its sleek and modern design seamlessly integrates into hardscape elements such as walls, steps, and patios. Crafted with high-quality materials, this fixture is built to withstand the elements, ensuring long-lasting durability and performance.



DCP-LHS12

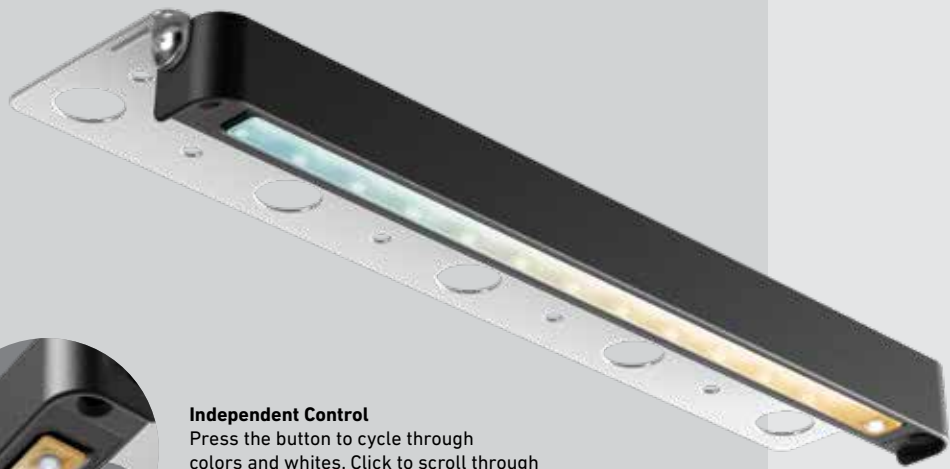


Independent Control
Press the button to cycle through colors and whites. Click to scroll through whites (2200K–4000K) and double-click to scroll through colors (7 colors).

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
DCP-LHS12	12"	5 W	200 lm	80	RGB + 2200 K - 4000 K	12 V AC / 24 V DC



DCP-LHS12

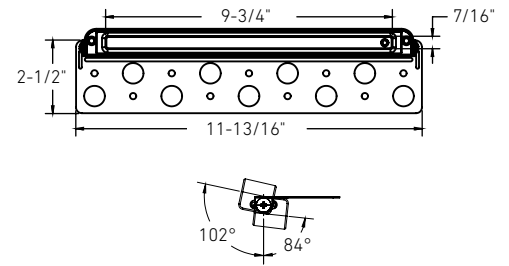

Specifications

Full color spectrum
2200K - 4000K in pure whites
Can be recessed or surface mounted
Can be mounted to wood or concrete
95° beam angle
Dimmable through the Dals Connect app and the Clicc remote (DCP-RMCT)
5-year warranty

Note

Add the DALS Connect Pro Core transformer for even greater flexibility: voice control, remote access, expanded mesh network.

Finish

● **BK** Black

Smart transformers

DCP-TR60-BK

60W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR200-BK

200W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

DCP-TR300-BK

300W, 120VAC 60Hz input, 24V DC output low-voltage smart transformer

Download the Dals Connect app

Create groups
Set schedules
Remote access*
Compatible with Google Assistant and Amazon Alexa*



*Core needed

Accessories

DCP-RMCT

Smart remote

DCP-PTR36

Plug-in driver

LCBL-50-16, LCBL-100-16

50 or 100 feet of 16-gauge low-voltage wiring

LCBL-50-14, LCBL-100-14

50 or 100 feet of 14-gauge low-voltage wiring

LCBL-100-12, LCBL-200-12

100 or 200 feet of 12-gauge low-voltage wiring