


UPGRADE

# ADEN

A classic cylindrical design paired with 5CCT flexibility and rugged, weather-resistant construction, built to perform and endure in any outdoor setting.




WET

**T24  
JA8**  
CERTIFIED



LEDWALL-A




**CCT Button**  
Easily select from multiple color temperature options.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-A-CC	13-3/4"	27 W	2025 lm	90	2700, 3000, 3500 4000, 5000 K	120 V Triac dimming
LEDWALL-A-CC-V	13-3/4"	28 W	2010 lm	90	2700, 3000, 3500 4000, 5000 K	V: 120 / 277 / 347V 0-10V dimming



## LEDWALL-A-CC

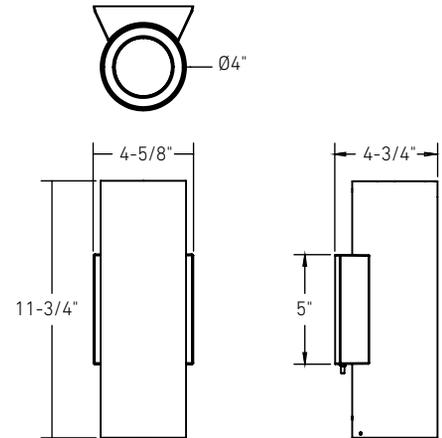

### Specifications

Made of extruded aluminum  
Switch-selectable CCT  
Integrated dimmable driver  
Aluminum end cap for unidirectional lighting included  
5-year warranty

### Finish

● **BK** Black

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.