

BROOKLYN

With its clean rectangular silhouette, this fixture blends classic style, 5CCT versatility, and durable construction to withstand the elements year-round.



UPGRADE



COLOR TEMPERATURE



WET


**T24
JA8**

CERTIFIED



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LEDWALL-B-CC	11-3/4"	27 W	1825 lm	90	2700, 3000, 3500 4000, 5000 K	120 V Triac dimming
LEDWALL-B-CC-V	11-3/4"	28 W	1790 lm	90	2700, 3000, 3500 4000, 5000 K	V: 120 / 277 / 347V 0-10V dimming

LEDWALL-B-CC

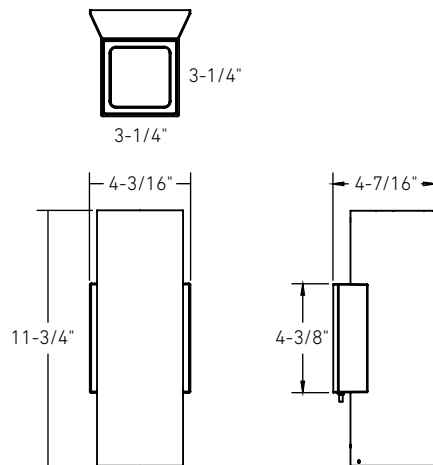

Specifications

Made of extruded aluminum
Switch-selectable CCT
Integrated dimmable driver
Aluminum end cap for unidirectional lighting included
5-year warranty

Finish

● **BK** Black

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.