

EMERGENCY DRIVER

The integrated emergency driver ensures uninterrupted lighting during power outages, delivering 8W or 15W of output for up to 90 minutes. This supports egress lighting, which is required to safely illuminate exit paths such as hallways and stairwells during emergencies.



BACKUP POWER



WET

IC

RATED



CERTIFIED




CERTIFIED


REC-EMD15



REC-EMD08

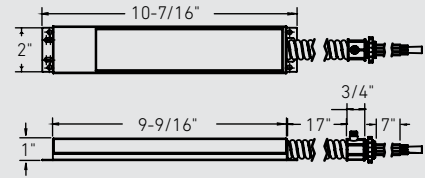

REC-EMD15

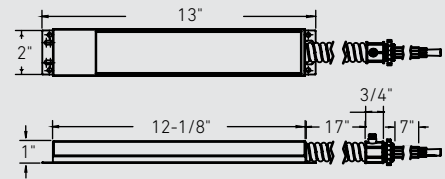

Model	Watts	Input voltage	Input current	Output voltage	Output voltage
REC-EMD08	8 W	100VAC-347VAC, 50/60Hz	200mA max	120 VDC	≤460mA
REC-EMD15	15 W	100VAC-230VAC, 50/60Hz	200mA max	120 VDC	≤460mA

Specifications

Selectable emergency power – 8W, 15W
 Universal input voltage 100–347 VAC
 Built-in lithium battery
 Battery protections – overcharge, over-discharge, short-circuit
 Battery lifespan 90 minutes
 Silicone-potted for added durability
 Recharge Time: 24 Hours
 Battery Charging Current: ≤500mA
 Operating temperature: 5°C ~ 50°C
 5-year warranty

Finish

● **RD** Red

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.