

DALS LIGHTING

NOTES

QUICK SPECS

Canada 80, de la Seigneurie blvd., E. Blainville, Quebec j7C 4N1 U.S.A. 4383, NW 124th Ave., Coral Springs, Florida 33065 877.430.1818 info@dals.com dals.com

MODEL LEDWALL-A-CC-V


NAME Aden

4in Round Wall Sconce

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.


PROJECT	TYPE	
DATE	QTY	



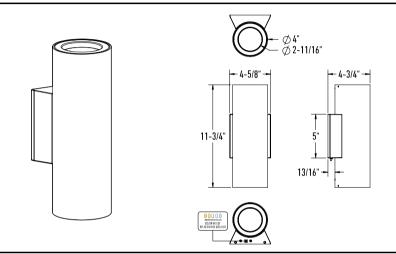

ELECTRICAL DETAILS

LIGHT DISTRIBUTION

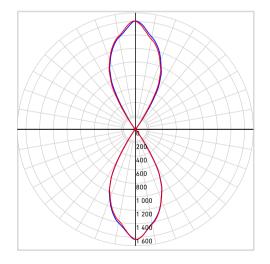

*Lumen output measured at 3000k

Size	12"	Environment	Wet
Watts (W)	28	Location	Indoor/Outdoor
Delivered lumens*	2010	Operating temp. (° C)	-30 to 40
CRI	90	IP rating	IP65
Voltage (v)	120/277/347	Input voltage (V)	120-347
Beam angle (deg)	115	Output voltage (V)	30-40
Mounting	Screwed in	Output current (mA)	700
Lifespan (hrs)	50 000	Power factor	90
Binning	5 SCDM	Driver type	Constant current
LED model	COB	THD	≤ 20%
Light direction	up and downlight	Certifications	ETL, FCC, ICES, T24/JA8
Color temperature	2700K/3000K/3500K/400	00K/5000K	

ORDERING GUIDE

LEDWALL-A-CC-V

Finish

BK - Black



CONSTRUCTION

Lens material	Glass
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
LED flush mount fixture		
Mounting bracket		
Mounting hardware		
Wire nuts		
Instruction sheet		

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	DIMMIN MIN	G RANGE % MAX	MAX LOAD
Lutron	DVSTV (0-10 V Controls)*	960W, 8A, 120–277 V	Compatible	9	95	33
Leviton	IP710-DLZ(0-10 V Controls)	1200VA, 10A LED, 120-277V	Compatible	0	98	42
Leviton	ZS057-30Z(0-10 V Controls)	1388VA, 4A , 347V	Compatible	0	100	28
Lutron	Vive PowPak Dimming Module RMJS-8T-DV-B(0-10 V Controls)	960VA, 8A, 120-277V	Compatible	0	100	33

*With Low-End Adjustment Feature

Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

